

Slide on connectors (mating/unmating force: 2.2 N to 4.9 N).


The design is suitable for **back plane and blind mate applications**. In this case, we recommend the association of a mobile connector (floating jack / receptacle) with a fixed connector (panel plug / jack, receptacle). Please see the available combinations in the table below.

The SUBGLIS connectors are completely intermateable with standard SMB and SMB-A connectors and in this regard, they can be used for **test applications**.

The Subglis connectors have the same electrical characteristics as standard SMB connectors.

part number	description	center contact	R116303330	R116556000
			Bulkhead floating jack clamp type for 2/50/S cable	Straight bulkhead floating receptacle (front mount)
R116003900	Bulkhead plug clamp type for 2/50/S cable	female	*	
R116056000	Bulkhead plug solder type for .085 cable	female	*	
R116311000	Bulkhead jack crimp type for 2/50/S cable	male		*
R116312000	Bulkhead jack crimp type for 2.6/50+75/S cable	male		*
R116372000	Right angle bulkhead jack crimp type for 2/50/S cable	male		*
R116373000	Right angle bulkhead jack crimp type for 2.6/50/S cable	male		*
R116425010	Straight PCB receptacle	female	*	
R116426000	Straight PCB receptacle	male		*
R116426030	Straight PCB receptacle	male		*
R116553000	Straight bulkhead receptacle (front mount)	male		*
R116554000	Straight bulkhead receptacle (rear mount)	male		*
R116557000	Straight bulkhead receptacle (front mount)	female	*	
R116566000	Straight bulkhead receptacle (front mount/recessed)	male		*
R116665000	Right angle PCB receptacle	male		*
R116666030	Right angle PCB receptacle	female	*	

BULKHEAD PLUG CLAMP TYPE FOR FLEXIBLE CABLE

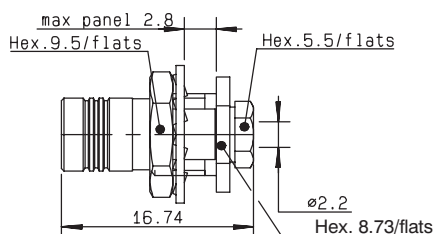

cable	part number	captive center contact	assembly	panel	finish	note
2/50S	R116 003 900●	yes	M01	P20	Gold	conical braid clamp

● upon request

standard packaging: unit