

SNH(TW)P 2:1 CABLE SLEEVES & SLEEVING**LOW FIRE HAZARD HEAT SHRINKABLE
THINWALL POLYOLEFIN 2:1****PRODUCT DATA****APPLICATION METHOD - SHRINK ON**

Manufactured from OSH(TW) Polyolefin, SNH(TW)P Cable Sleeves and Slewing are for use in areas where low fire hazard properties are mandatory, particularly mass-transit and underground areas. SNH(TW)P Cable Sleeves and Slewing will operate in the temperature range -40°C to +105°C.

Flame Retardant
Low Smoke
Zero Halogen
Self Extinguishing
Available in 6 Standard Colours
115°C Minimum Shrink Temperature



Bulk packed as standard; also available packed to your requirements. SNHP 2:1 Cable Sleeves and Slewing is available as cut sleeves and continuous slewing.

APPROVAL STANDARDS

BS 4G198, Part 3, Type 15
DEF STAN 59-97, Type 8
LUL 1-085
BS 6746 C
International RCC Markers
BS6853 Cat. 1a
LUL 2-01001-002 (E1042A6)
EN 45545-2 R24 (HL1, HL2 & HL3)
RoHS Compliant
REACH Compliant

PROPERTY	VALUE
Temperature Range	-40°C to +105°C - 175°C (Short Periods)
Flammability	Self extinguishing
Toxicity Index (D.Stan)	0.938
Smoke Index (D.Stan)	5.6
Oxygen (D.Stan)	36
Flame Temp Index (D.Stan)	355
Tensile Strength	7.0 MPa
Elongation At Break	200%
Chemical Resistance	G198/DS 59-97 Fair
Max. Longitudinal Change, typically	+0%, -5%


SEI Identification Solutions Ltd t : +44 (0) 1843 865241
Pysons Road Industrial Estate f : +44 (0) 1843 867180
Broadstairs Kent CT10 2LQ UK e : info@sei-id.com

©2015 SEI Identification Solutions Ltd. All rights reserved. The SEI Identification Solutions logo is a registered trademark of SEI Identification Solutions Limited. Other products and brand names may be trademarks of their respective owners. The information on this datasheet is believed to be correct at the time of publishing. Specifications given in this publication are subject to change without notice.

CABLE IDENTIFICATION RECOGNISED WORLDWIDE

SNH(TW)P 2:1 CABLE SLEEVES & SLEEVING

**LOW FIRE HAZARD HEAT SHRINKABLE
THINWALL POLYOLEFIN 2:1**



SNH(TW)P Cable Sleeves and Slewing are usually shrink fitted using a heatgun, oven or shrink tunnel. If possible, select an 'Expanded I/D' large enough to achieve a good degree of recovery when shrunk.

ADDITIONAL INFORMATION

- BS 4G198, Part 3, Type 15
- DEF STAN 59-97, Type 8
- LUL 1-085
- BS 6746 C
- International RCC Markers
- BS6853 Cat. 1a
- LUL 2-01001-002 (E1042A6)
- EN 45545-2 R24 (HL1, HL2 & HL3)
- RoHS Compliant
- REACH Compliant

PRODUCT REFERENCE	EXPANDED ID BORE MIN. (MM)	RECOVERED ID BORE MAX. (MM)	RECOVERED WALL NOMINAL (MM)	COLOUR CODE	FORM
SNH(TW)P32	3.2	1.6	0.51	BK=Black	Continuous sleeving
SNH(TW)P48	4.8	2.4	0.51	RD=Red	Par-O-Cut
SNH(TW)P64	6.4	3.2	0.64	YW=Yellow	Markers
SNH(TW)P95	9.5	4.8	0.64	GN=Green	Kit Boxes
SNH(TW)P127	12.7	6.4	0.64	BE=Blue	Easy Peel Kit Card
SNH(TW)P191	19.1	9.5	0.76	WE=White	Kit Bags
SNH(TW)P254	25.4	12.7	0.89		
SNH(TW)P381	38.1	19.1	1.02		
SNH(TW)P508	50.8	25.4	1.14		
SNH(TW)P762	76.2	38.1	1.27		
SNH(TW)P1016	101.6	50.8	1.40		


**BUSINESS
MANAGEMENT
ACCREDITATIONS**



Registered in England No. 412829

Ordering Information Example

SNH(TW)P 32 x 50 WE

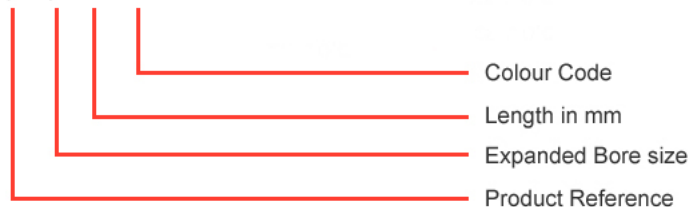

Omit the letter 'P' from code if you require continuous sleeving.

Colour Availability:

Black, Red, Yellow, Green, Blue, White.

Other sizes available on request

SEI Identification Solutions Ltd t : +44 (0) 1843 865241
 Pysons Road Industrial Estate f : +44 (0) 1843 867180
 Broadstairs Kent CT10 2LQ UK e : info@sei-id.com

©2015 SEI Identification Solutions Ltd. All rights reserved. The SEI Identification Solutions logo is a registered trademark of SEI Identification Solutions Limited. Other products and brand names may be trademarks of their respective owners. The information on this datasheet is believed to be correct at the time of publishing. Specifications given in this publication are subject to change without notice.

CABLE IDENTIFICATION RECOGNISED WORLDWIDE