
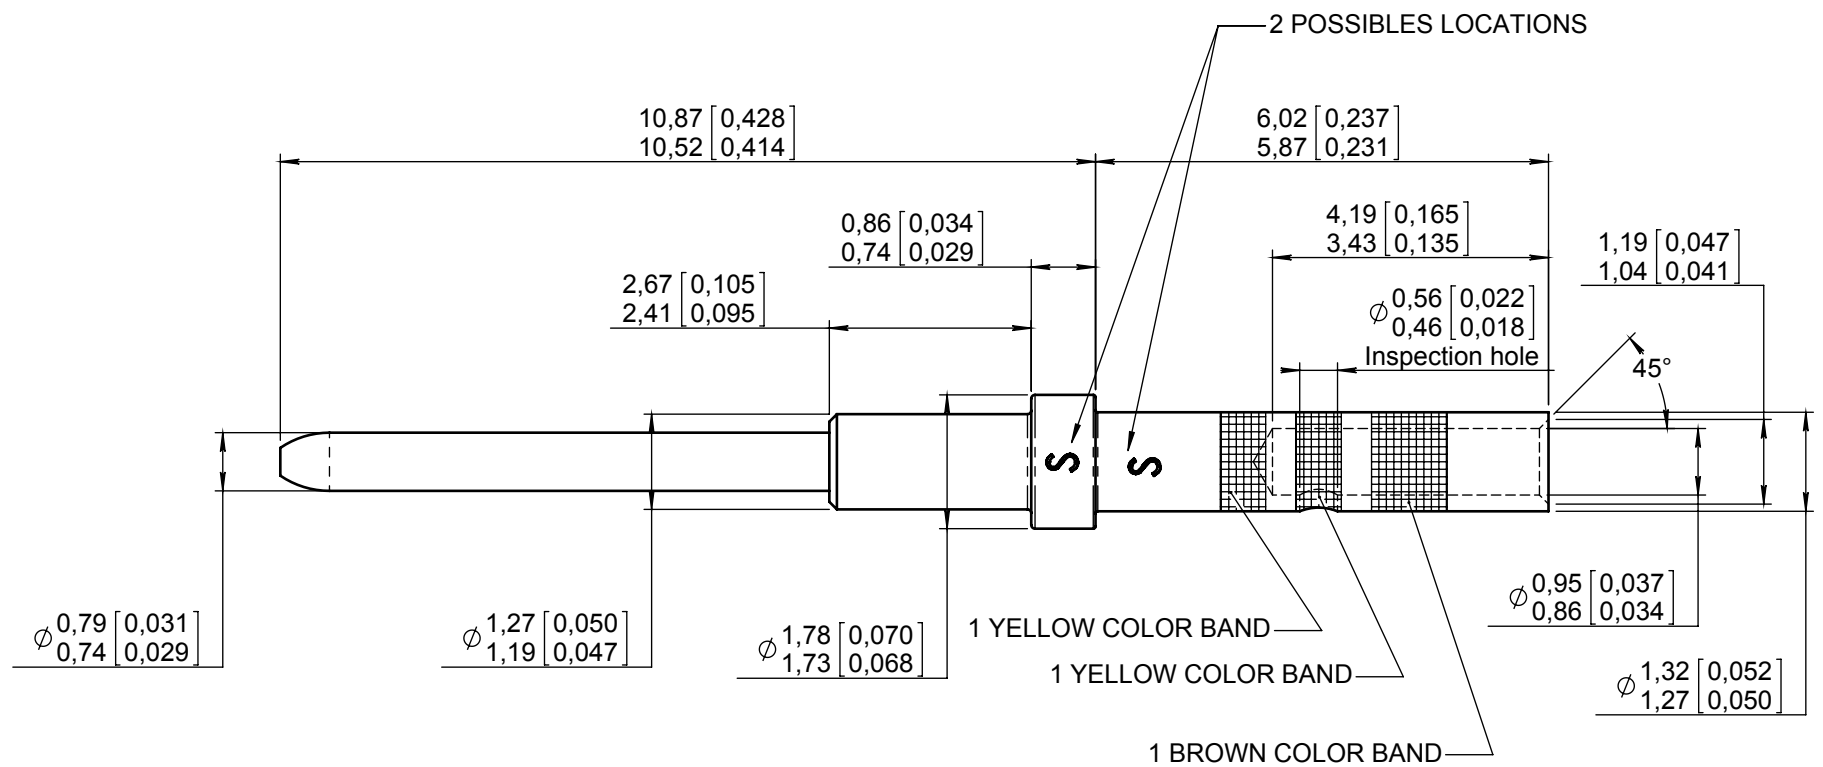


Series
DSX

SIZE 22 CRIMP PIN CONTACT
WIRE SIZE AWG 22-24-26
COMPLIANT TO M39029/11-144

Issue:
Nov. 07, 2014

Page
1/1

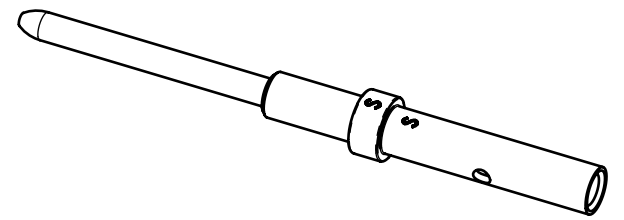

MATERIAL : LEAD NICKEL COPPER
FINISH : GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 50 MICROINCHES OVER NICKEL PLATE PER QQ-N-290

WIRES ACCOMODATED : AWG 22-24-26
INSULATOR DIAMETER : .055 MAX (1,40)
STRIP LENGTH : .138 (3,50)


CRIMP CONTACT TENSILE REQUIREMENTS USING MIL SPEC TOOLING AND WIRE SPEC
M22520/2-01 22 GA. 11 LBS (5,5 daN)

CRIMPED CONTACTS WILL SHOW NO CRACK WHEN INSPECTED PER MIL-C-22520 AT 10X

RADIALL TOOLING RECOMMENDATION
CRIMPING TOOL : M22520/2-01 (RADIALL 282 281)
SELECTOR POSITION : 4 FOR AWG 22
3 FOR AWG 24
3 FOR AWG 26
POSITIONER : M22520/2-23 (RADIALL 282 970)

INSERTION/EXTRACTION TOOL : M81969/1-01 (RADIALL 282 885) OR M81969/14-01 (RADIALL 282522)
SPL RADIALL INS. 282 880 / EXT. 282 890

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 0.13 g

CREATION				
PEN:				
NOM: MACARI	Nov. 07, 14	Added M81969/14-01 (RADIALL 282522)	Zuniga	Dupuis
DATE: May 29, 1980	Dec. 02, 13	Add M39029/11-144 in the title	Moutault	Dupuis
APPR.:	Jan. 04, 07	Added tolerance on dimensions	DUPUIS	MONDOT
	Issue	Revisions	Name	Approved

616200EN

RADIALL PROPRIETARY INFORMATION

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311