

HC-D07-I-CT-F-42V-METAL - Contact insert



1425006

<https://www.phoenixcontact.com/in/products/1425006>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

HEAVYCON male insert, D7 series, 7-pos., crimp connection, with IP65 sealing screw



Your advantages

- Can be used in rail vehicles, satisfy DIN EN 45545-2 with requirement sets R22, R23, and R24 in hazard levels HL1, HL2, and HL3.

Commercial Data

Item number	1425006
Packing unit	1 pc
Minimum order quantity	10 pc
Sales Key	*****
Product Key	BF7ABE
GTIN	4055626383354
Weight per Piece (including packing)	9.5 g
Weight per Piece (excluding packing)	9.3 g
Customs tariff number	85389099
Country of origin	CN

HC-D07-I-CT-F-42V-METAL - Contact insert



1425006

<https://www.phoenixcontact.com/in/products/1425006>

Technical Data

Notes

General	Connectors may be operated only when there is no load/voltage.
---------	--

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
-----------------------	---


Product properties

Type	D7
Product type	Contact insert with a fixed no. of positions
Number of positions	7
Note number of positions	7+PE
Connection profile	7+PE
Contact numbering	1 - 7
Contact type	turned
Series	HC-D

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

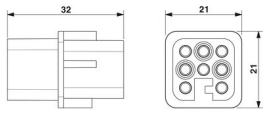Dimensional drawing	
Height	32 mm

Mechanical characteristics

Contact diameter	1.6 mm
------------------	--------

Electrical properties

Rated voltage (III/3)	42 V
Rated surge voltage	0.8 kV
Rated current	10 A
SCCR	5 kA (UL 2237)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

HC-D07-I-CT-F-42V-METAL - Contact insert



1425006

<https://www.phoenixcontact.com/in/products/1425006>

Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

Standards and regulations

Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Tests	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---


HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>


Drawings

Dimensional drawing

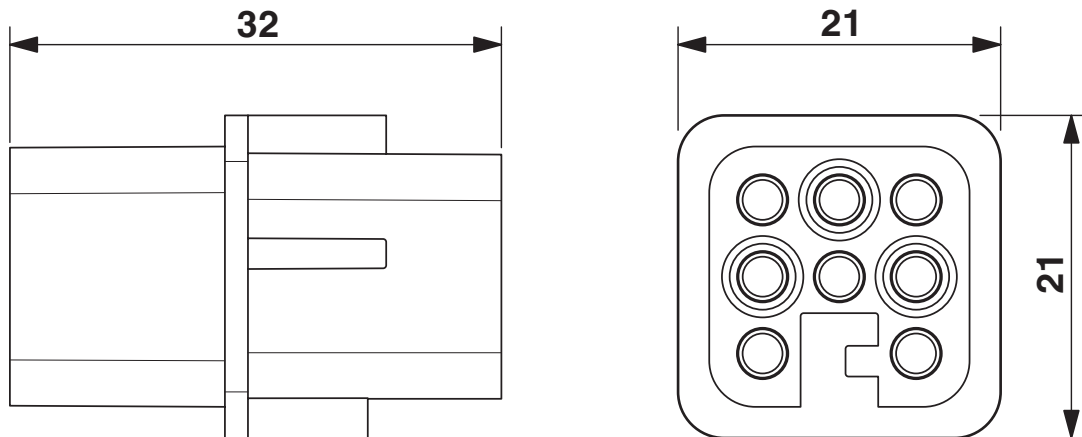

Female insert

Diagram

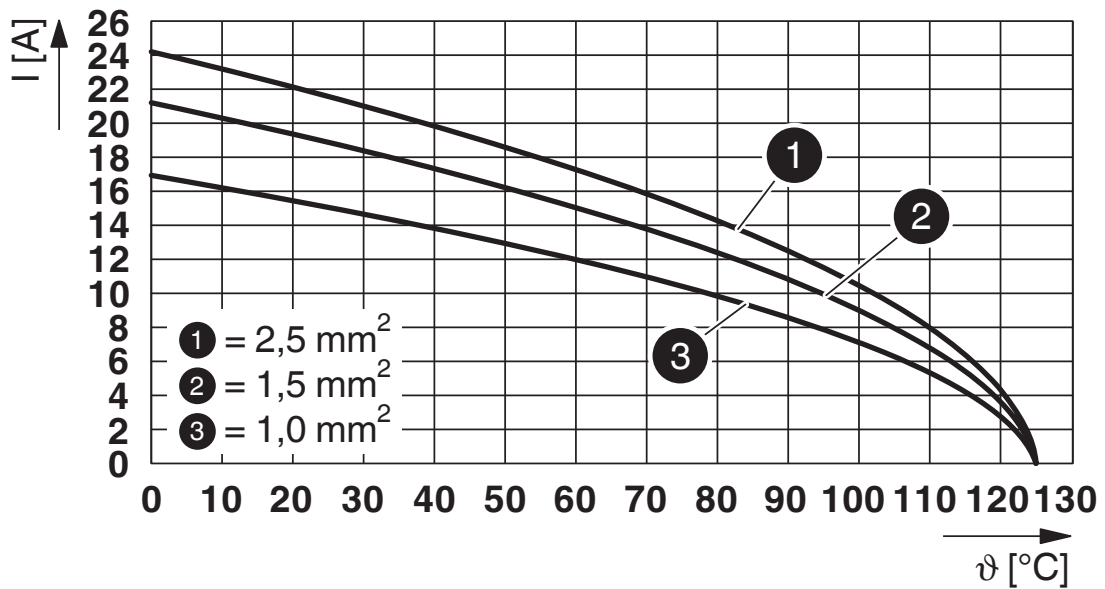

Derating diagram turned contacts


HC-D07-I-CT-F-42V-METAL - Contact insert



1425006


<https://www.phoenixcontact.com/in/products/1425006>

Diagram

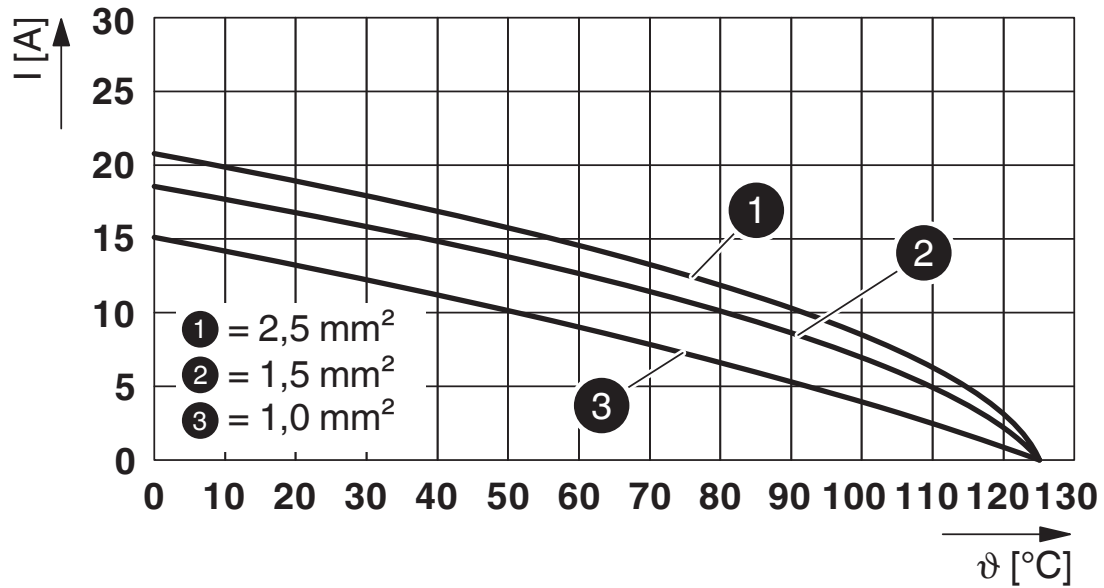

Derating diagram rolled contacts

Schematic diagram

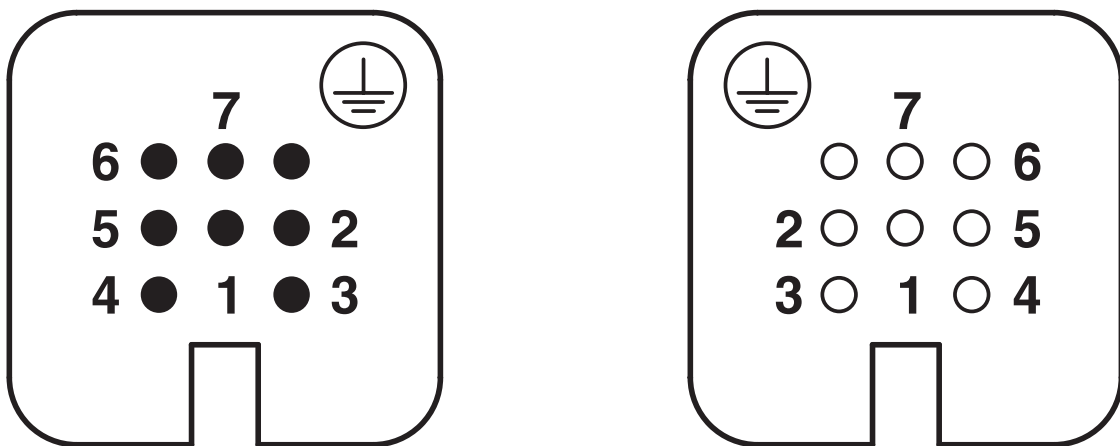

Connector pin assignment connection side: Left pin; right socket

HC-D07-I-CT-F-42V-METAL - Contact insert



1425006

<https://www.phoenixcontact.com/in/products/1425006>

Approvals

 CSA Approval ID: 13631				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	42 V	10 A	- 14	-

 UL Recognized Approval ID: E118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	42 V	10 A	-	-

 UL Recognized Approval ID: E468743				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	42 V	10 A	-	-

HC-D07-I-CT-F-42V-METAL - Contact insert



1425006

<https://www.phoenixcontact.com/in/products/1425006>

Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 8.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-D07-I-CT-F-42V-METAL - Contact insert



1425006

<https://www.phoenixcontact.com/in/products/1425006>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



Accessories

HC-CP-CK1.6-PL - Coding element

1095422

<https://www.phoenixcontact.com/in/products/1095422>

Coding element for HC-D and HC-DD contact inserts with pole loss. Installed in the socket contact chamber.



HC-D 7-DS-IP65 - Sealing screw

1686229

<https://www.phoenixcontact.com/in/products/1686229>

Sealing screw, size: Countersunk head, IP67, replacement part for D7 size HEAVYCON housing



HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



UNIFOX MT-CK 1.6/2.5 - Assembly tool

1089092

<https://www.phoenixcontact.com/in/products/1089092>

Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections



UNIFOX RT-CK 1.6 - Contact removal tool

1072069

<https://www.phoenixcontact.com/in/products/1072069>

Contact removal tool, for turned and rolled CK- 1.6-... contacts



HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>

CK1,6-ED-0,37BU AG - Crimp contact

1663394

<https://www.phoenixcontact.com/in/products/1663394>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 26 ... 22

CK1,6-ED-0,50BU AG - Crimp contact

1663404

<https://www.phoenixcontact.com/in/products/1663404>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ED-0,75BU AG - Crimp contact

1663417

<https://www.phoenixcontact.com/in/products/1663417>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CK1,6-ED-1,00BU AG - Crimp contact

1663420

<https://www.phoenixcontact.com/in/products/1663420>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ED-1,50BU AG - Crimp contact

1663433

<https://www.phoenixcontact.com/in/products/1663433>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

CK1,6-ED-2,50BU AG - Crimp contact

1663446

<https://www.phoenixcontact.com/in/products/1663446>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ED-BU-POF - Female contact

1885004

<https://www.phoenixcontact.com/in/products/1885004>



POF fiber optic socket contact, turned, for contact carriers (HC-DD...I-CT.../ HC-M-12-CT-F.../ HC-M-17-CT-F...) of CK1,6-ED... contacts

CK1,6-ED-0,37F AG - Crimp contact

1266249

<https://www.phoenixcontact.com/in/products/1266249>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.14 mm² ... 0.34 mm², AWG 24 ... 22

HC-D07-I-CT-F-42V-METAL - Contact insert



1425006

<https://www.phoenixcontact.com/in/products/1425006>

CK1,6-ED-0,50F AG - Crimp contact

1266252

<https://www.phoenixcontact.com/in/products/1266252>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK1,6-ED-0,75F AG - Crimp contact

1266259

<https://www.phoenixcontact.com/in/products/1266259>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>

CK1,6-ED-1,00F AG - Crimp contact

1266296

<https://www.phoenixcontact.com/in/products/1266296>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CK1,6-ED-1,50F AG - Crimp contact

1266263

<https://www.phoenixcontact.com/in/products/1266263>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ED-2,50F AG - Crimp contact

1266295

<https://www.phoenixcontact.com/in/products/1266295>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK1,6-ED-0,37BU AU - Crimp contact

1674969

<https://www.phoenixcontact.com/in/products/1674969>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 24 ... 22

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ED-0,50BU AU - Crimp contact

1674480

<https://www.phoenixcontact.com/in/products/1674480>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.5 mm² ... 0.5 mm², AWG 20

CK1,6-ED-0,75BU AU - Crimp contact

1672440

<https://www.phoenixcontact.com/in/products/1672440>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ED-1,00BU AU - Crimp contact

1674943

<https://www.phoenixcontact.com/in/products/1674943>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CK1,6-ED-1,50BU AU - Crimp contact

1674930

<https://www.phoenixcontact.com/in/products/1674930>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ED-2,50BU AU - Crimp contact

1674985

<https://www.phoenixcontact.com/in/products/1674985>



Crimp contact, contact diameter: 1.6 mm, turned, Socket, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 2.5 mm² ... 2.5 mm², AWG 14

CK1,6-ER-1,00BU OIC AG - Crimp contact

1004362

<https://www.phoenixcontact.com/in/products/1004362>



Crimp contact, contact diameter: 1.6 mm, rolled, Socket, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-ER-2,50BU OIC AG - Crimp contact

1004366

<https://www.phoenixcontact.com/in/products/1004366>



Crimp contact, contact diameter: 1.6 mm, rolled, Socket, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14

CK1,6-BR-1,00BU OIC AG - Crimp contact

1004381

<https://www.phoenixcontact.com/in/products/1004381>



Crimp contact, contact diameter: 1.6 mm, rolled, Socket, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17, Taped products

HC-D07-I-CT-F-42V-METAL - Contact insert

1425006

<https://www.phoenixcontact.com/in/products/1425006>



CK1,6-BR-2,50BU OIC AG - Crimp contact

1004383

<https://www.phoenixcontact.com/in/products/1004383>



Crimp contact, contact diameter: 1.6 mm, rolled, Socket, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14, Taped products

HC-D07-I-CT-M-42V-METAL - Contact insert

1425005

<https://www.phoenixcontact.com/in/products/1425005>



HEAVYCON male insert, D7 series, 7-pos., crimp connection, with IP65 sealing screw

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in