

PSBJ-URTK 6 GY - Female test connector



3026612

<https://www.phoenixcontact.com/in/products/3026612>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Female test connector, number of positions: 1, fuse type: , mounting type: , , color: gray

Your advantages

- The test socket PSBJ... is used in place of the normal bridge screw and ensures the voltage pick-off on a bridged group of terminals
- The test sockets are tailored to the special applications encountered in the power supply industry

Commercial Data

Item number	3026612
Packing unit	10 pc
Minimum order quantity	10 pc
Sales Key	BE1
Product Key	BE1Z3X
Catalog Page	Page 587 (C-1-2019)
GTIN	4017918359973
Weight per Piece (including packing)	2.486 g
Weight per Piece (excluding packing)	2.486 g
Customs tariff number	85366990
Country of origin	PL

PSBJ-URTK 6 GY - Female test connector

3026612


<https://www.phoenixcontact.com/in/products/3026612>

Technical Data

Product properties

Product type	Test socket
Number of positions	1

Dimensions

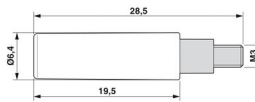Dimensional drawing	
Width	6 mm
Height NS 35/7,5	15 mm
Length	6 mm
Pin diameter	4.1 mm

Material specifications

Color	gray
Material	Brass
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

PSBJ-URTK 6 GY - Female test connector




3026612

<https://www.phoenixcontact.com/in/products/3026612>

Drawings

Dimensional drawing

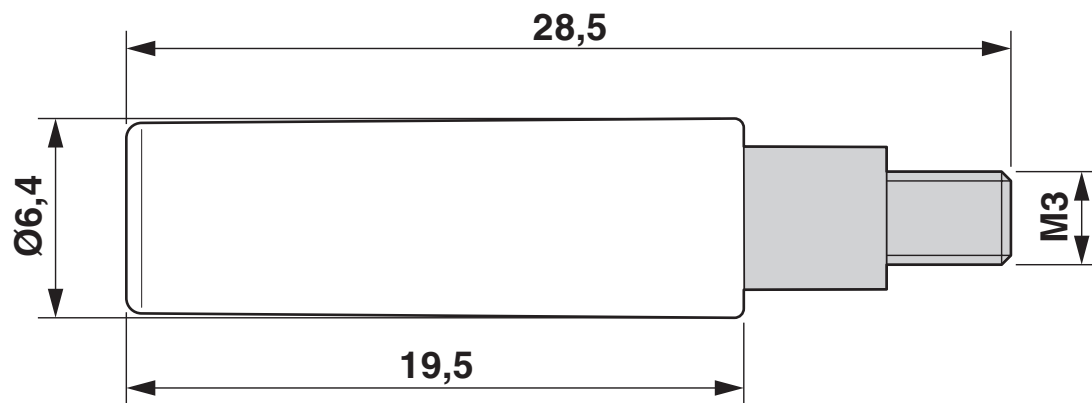

PSBJ-URTK 6 GY - Female test connector



3026612

<https://www.phoenixcontact.com/in/products/3026612>

Classifications

ECLASS

ECLASS-11.0	27440313
ECLASS-12.0	27440313
ECLASS-12.0	27440313
ECLASS-12.0	27440313

ETIM

ETIM 8.0	EC002255
----------	----------

UNSPSC

UNSPSC 21.0	20122000
-------------	----------

PSBJ-URTK 6 GY - Female test connector



3026612

<https://www.phoenixcontact.com/in/products/3026612>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in