

SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sensor/actuator box, application: Food processing industry, connection method: M12 socket
Stainless steel, number of slots: 8, number of positions: 5, coding: A, slot assignment: Double,
status display: Yes, pnp; master cable connection: Fixed connection 180°, PVC, cable length:
5 m, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Convenient: increased machine availability thanks to quick and easy diagnostics
- Save space: distributor box with double occupancy for two sensors in one slot

Commercial Data

Item number	1555541
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF3
Product Key	BF3EAA
Catalog Page	Page 146 (C-4-2013)
GTIN	4046356170529
Weight per Piece (including packing)	1,458 g
Weight per Piece (excluding packing)	1,458 g
Customs tariff number	85444290
Country of origin	DE

SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Technical Data

Notes

Assembly instruction:	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
Note on application	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

Product properties

Product type	Distributor boxes with M8 to M12 slots
Number of positions	5
Application	Food processing industry
Number of slots	8
Coding	A

Material specifications

Color	silver
Material Threaded sleeve	Stainless steel 1.4404
Material Housing	Stainless steel 1.4404
Material Molding compound	PUR
Seal material O-ring	FKM
Contact material	CuSn6
Contact surface material	gold-plated
Contact carrier material	PBT

Dimensions

Dimensional drawing	
Width	60 mm
Height	34.9 mm
Length	170 mm

Connection data

Conductor connection	
Connection method	Fixed connection
Tightening torque slot sensor/actuator cable	0.4 Nm

Pin assignment

SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Slot/position = Wire color or connection	1 / 4 (A) = WH
	1 / 2 (B) = GYPK
	2 / 4 (A) = GN
	2 / 2 (B) = RDBU
	3 / 4 (A) = YE
	3 / 2 (B) = WHGN
	4 / 4 (A) = GY
	4 / 2 (B) = BNGN
	5 / 4 (A) = PK
	5 / 2 (B) = WHYE
	6 / 4 (A) = RD
	6 / 2 (B) = YEBN
	7 / 4 (A) = BK
	7 / 2 (B) = WHGY
	8 / 4 (A) = VT
	8 / 2 (B) = GYBN
	1-8 / 1 (+ 24 V) = BN
1-8 / 3 (0 V) = BU	
1-8 / 5 (PE) = GNYE	

Signaling

Status display present	Yes
------------------------	-----

Electrical properties

Max. operating voltage U_{max}	30 V DC
Local diagnostics	Supply voltage Green LED
	Status display I/O Yellow LED
Nominal voltage U_N	24 V DC
Rated current, total	12 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

Cable/line

Cable length	5 m
Sensor/actuator connection system	M12 socket
Connection method	Fixed connection
Outside diameter	10.5 mm
Conductor cross section signal conductor	16x 0.5 mm ²
Conductor structure signal line	64x 0.10 mm
AWG signal line	20
Conductor cross section voltage supply	3x 1 mm ²
Conductor structure, voltage supply	128x 0.10 mm
AWG power supply	17
Number of bending cycles	1000000

SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Traversing rate	3 m/s
Traversing path	5 m
Tightening torque slot sensor/actuator cable	0.4 Nm
Ambient temperature (operation)	-40 °C ... 90 °C (for fixed installation)
	-5 °C ... 80 °C (for flexible installation)

Standards and regulations

M12

Standards/specifications	IEC 61076-2-101
--------------------------	-----------------


Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP69K
Ambient temperature (operation)	-30 °C ... 80 °C

Drawings

Schematic diagram

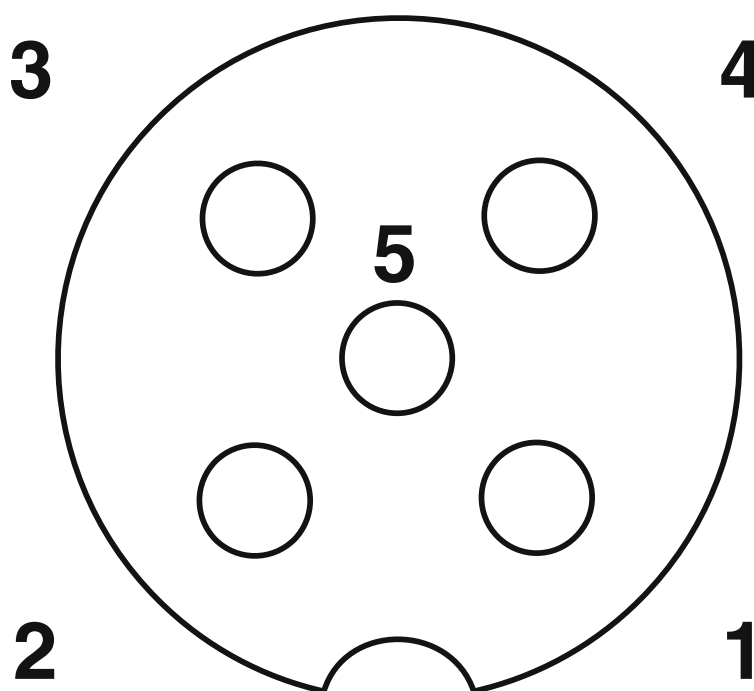

Pin assignment M12 socket, 5-pos., A-coded, socket side view


SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Circuit diagram

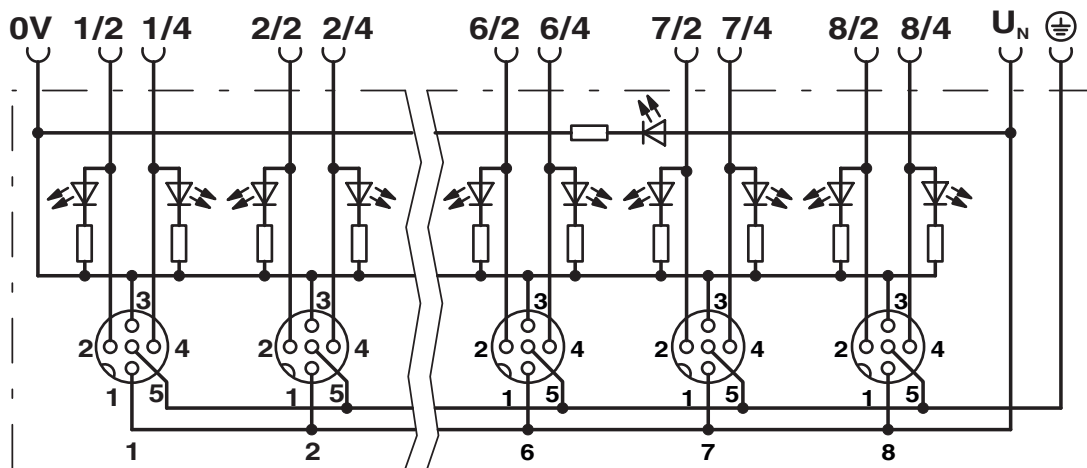


SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Dimensional drawing

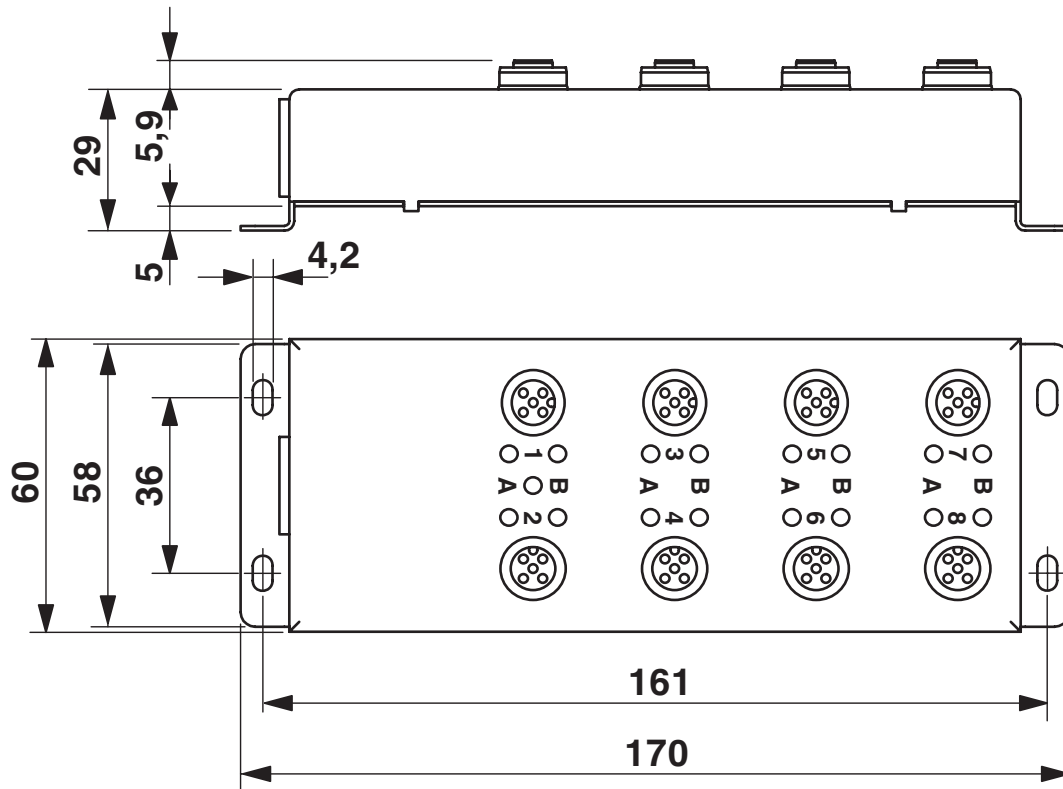

Dimensional drawing

SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Classifications

ECLASS

ECLASS-11.0	27440108
ECLASS-12.0	27440108
ECLASS-13.0	27440108

ETIM

ETIM 8.0	EC002585
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

SACB-8/16-L- 5,0PVC FB - Sensor/actuator box



1555541

<https://www.phoenixcontact.com/in/products/1555541>

Accessories

PROT-M12 FB - Screw plug

1555538

<https://www.phoenixcontact.com/in/products/1555538>



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in