

https://www.phoenixcontact.com/in/products/3034374



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, can be sealed as an option



Your advantages

- It offers parking options for FBS ...-8 plug-in bridges and can be sealed as an option
- The APH-ME end bracket is used in conjunction with the AP-ME cover

Commercial Data

Item number	3034374
Packing unit	10 pc
Minimum order quantity	10 pc
Sales Key	BE6
Product Key	BE61ZX
Catalog Page	Page 629 (C-1-2019)
GTIN	4046356316767
Weight per Piece (including packing)	28.17 g
Weight per Piece (excluding packing)	27.28 g
Customs tariff number	39269097
Country of origin	PL



https://www.phoenixcontact.com/in/products/3034374



Technical Data

Product properties

	Product type	Cover profile carrier
--	--------------	-----------------------

Dimensions

Dimensional drawing	71 71
Width	8.2 mm
Height	91.8 mm
Height NS 35/7,5	92.5 mm
Length	138 mm

Material specifications

Color	gray
Material	PA
Flammability rating according to UL 94	V2
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C 70 °C
Ambient temperature (actuation)	-5 °C 70 °C
Permissible humidity (storage/transport)	30 % 70 %

Mounting



3034374

https://www.phoenixcontact.com/in/products/3034374




Mounting type	NS 35/7,5
	NS 35/15

3034374

https://www.phoenixcontact.com/in/products/3034374



Drawings

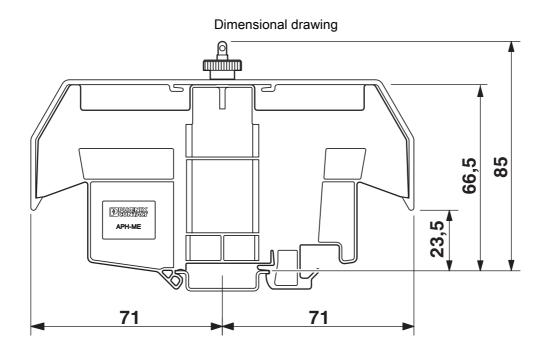



https://www.phoenixcontact.com/in/products/3034374



Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27141135
ECLASS-12.0	27141135
ECLASS-13.0	27250302
ETIM	
ETIM 8.0	EC001041
UNSPSC	

39121400



https://www.phoenixcontact.com/in/products/3034374



Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



https://www.phoenixcontact.com/in/products/3034374



Accessories

AH-ME - Covering hood

3240265

https://www.phoenixcontact.com/in/products/3240265



 $\ensuremath{\text{\textbf{CoVer}}}\xspace,$ for the contact- and dust-protected encapsulation of the components

AH-ME 145X150X80 - Covering hood

3240266

https://www.phoenixcontact.com/in/products/3240266



Cover, for the contact- and dust-protected encapsulation of the components



https://www.phoenixcontact.com/in/products/3034374



AH-ME 115X150X80 - Covering hood

3240267

https://www.phoenixcontact.com/in/products/3240267



Cover, for the contact- and dust-protected encapsulation of the components

AP-ME METER - Cover profile

3034361

https://www.phoenixcontact.com/in/products/3034361



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m



https://www.phoenixcontact.com/in/products/3034374



AP-ME CM - Cover profile

3034345

https://www.phoenixcontact.com/in/products/3034345



Cover profile for covering terminal strips, snaps onto cover profile carrier APT-ME or end clamp APH-ME. A cover profile carrier is to be positioned at the ends and at intervals of around 40 cm. Length as per customer requirement.

SBS 8:UNBEDRUCKT - Marker card

1007235

https://www.phoenixcontact.com/in/products/1007235



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm



https://www.phoenixcontact.com/in/products/3034374



NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/in/products/0801733



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m) $\,$

NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/in/products/0801681



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)



https://www.phoenixcontact.com/in/products/3034374



NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/in/products/1204119



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m) $\,$

NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/in/products/1204122



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)




https://www.phoenixcontact.com/in/products/3034374



NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/in/products/0801704



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m) $^{\circ}$

NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/in/products/1206421



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



https://www.phoenixcontact.com/in/products/3034374



NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/in/products/1206434



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/in/products/0801762



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)



https://www.phoenixcontact.com/in/products/3034374



NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/in/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/in/products/1201730



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)



https://www.phoenixcontact.com/in/products/3034374



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/in/products/1201714



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m) $\,$

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/in/products/0806602



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)




https://www.phoenixcontact.com/in/products/3034374



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/in/products/1204135



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m) $^{\circ}$

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/in/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



https://www.phoenixcontact.com/in/products/3034374



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/in/products/1206599



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 $(50\ m)$

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/in/products/1206586



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



https://www.phoenixcontact.com/in/products/3034374



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/in/products/1201895



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m) $\,$

NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/in/products/1206573

DIN rail end piece, for DIN rail NS 35/15





https://www.phoenixcontact.com/in/products/3034374



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/in/products/1201798



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

E/AL-NS 35 - End clamp

1201662

https://www.phoenixcontact.com/in/products/1201662



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

Phoenix Contact 2023 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in