




REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NEW PRODUCT	18APR19	BROOK	TOMMY




WIRING DIAGRAM

120 OHMS
1/2 WATT
5%




FACE VIEW

SOLID REAR SEAL

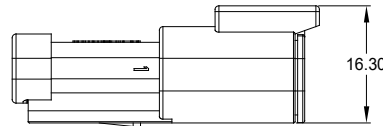

CONTACT
AT60-202-2031
2X




LOCKING WEDGE
AWM-2PA

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
HOUSING: THERMOPLASTIC; GRAY
SEAL: SILICONE RUBBER
- MODIFICATIONS: RESISTOR
- CONNECTOR SPECIFICATIONS:
 - CURRENT RATING: 7.5 AMPS
 - OPERATING TEMPERATURE: -55°C TO +125°C
 - DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - MATING CYCLE DURABILITY: 100 CYCLES
 - RoHS COMPLIANT
- RESISTOR SPECIFICATIONS: 120 OHMS
- MATING PART: ATM06-2S* PLUG
(* = MODIFICATIONS AND COLORS)
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

GRAY END CAP
AND CONNECTOR BODY

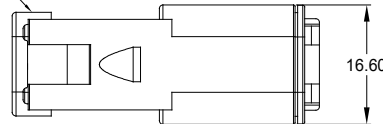

ATM04-2P-RA120GY		REF: DTM04-2P-006	
PART NUMBER		DESCRIPTION	
QUANTITY	MATERIALS LIST		
UNLESS OTHERWISE SPECIFIED: 1) All dimensions are in metric (mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1° 3) Note reference =		SIGNATURES	DATE
MATERIAL SPECIFICATIONS:		DRAWN: BROOKING	18APR19
PROCESS SPECIFICATIONS:		CHECKED: ORION LI	18APR19
NEXT ASSY:		ENGINEER:	
		APPROVAL: TOMMY	18APR19
		CUSTOMER:	
		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
		Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036	
RECEPTACLE, A KEY, 2 CONTACTS, RESISTOR, ATM GRAY			
SIZE: B	TYPE: C-	DWG NO: ATM04-2P-RA120GY	REVISION: A1
SCALE: NONE		SHEET 1 OF 1	

TITLE: RECEPTACLE, A KEY, 2 CONTACTS, RESISTOR, ATM, GRAY
DWG NO: ATM04-2P-RA120GY
REV: A1
SH: 1
OF: 1