


NOTE:

1. ELECTRICAL CHARACTERISTICS

- 1-1 RATING CURRENT: 3A AC/DC
  - 1-2 RATING VOLTAGE: 250V AC/DC
  - 1-3 WITHSTANDING VOLTAGE: 800V AC/1MINUTE
  - 1-4 OPERATING TEMPERATURE: -40°C~+105°C
  - 1-5 INSULATION RESISTANCE: 1000M ohm MIN
2. MATERIAL: REFER TO ORDERING CODE
3. FINISH: BRIGHT TIN PLATING
4. INSULATION O.D.: φ1.70MM MAX
- WIRE SIZE: AWG#22~26 (0.35~0.13mm<sup>2</sup>)
5. USED WITH AFCI 10156616
6. PRODUCT SPEC: GS-12-1595
7. ORDERING CODE: 10156617-X 0 0 X LF

MATERIAL: PHOSPHOR BRONZE  
4-BRASS  
1: REEL  
PACKAGE

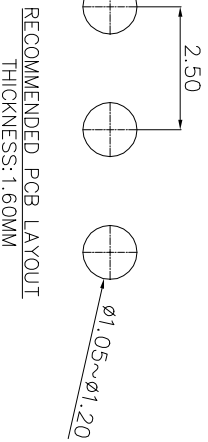

mat'l. code	ecn no	dr	date	surface	tolerance	projection	product family
A	New release	Jason	2020-2-19	ISO 1302	ISO 406 ISO	110°	MINITEK
B	ELX-N-36510	Jason	2020-4-2	tolerances unless otherwise specified	.X±.3 .XX±.20	mm	2.5PITCH BOARD-IN, R/A, TERMINAL
				0°±x'	.XXX±.10	Scale 2:1	
		dr	Jason Wang				2020-1-19
		engr	Jason Wang				2020-4-2
		chr	-				-
		qppd	Tim Yao				2020-4-2
sheet index	revision	sheet	1				dwg no
	B	1					10156617
							sheet 1 of 1
							size
							A3