

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sensor/actuator cable, 8-position, Variable cable type, shielded, Plug straight M12, coding: A, on free cable end, cable length: Free input (0.2 ... 40.0 m)

Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial Data

Item number	1522804
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	BF1
Product Key	BF1CMA
Catalog Page	Page 211 (C-2-2019)
Customs tariff number	85444290
Country of origin	PL

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

Technical Data

Product properties

Product type	Sensor/actuator cable
Number of positions	8
Application	Standard
No. of cable outlets	1
Shielded	yes
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	HB
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	30 V AC
	30 V DC
Nominal current I_N	2 A
Protective circuit	unwired

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	------------

Signaling

Status display	No
Status display present	No

Connection data

Conductor connection

Tightening torque	0.4 Nm (M12 connector)
-------------------	------------------------

Connector

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>


Connection 1

Coding type	A
-------------	---

Cable/line

Cable length	Free input (0.2 ... 40.0 m)
--------------	-----------------------------

PUR halogen-free black [PUR]

Dimensional drawing	
Shielded	yes
UL AWM Style	20549 / 10493 (80°C/300 V)
Cable weight	53 kg/km
Cable type	PUR halogen-free black
Short symbol	LiF9YC11Y
Cable type (abbreviation)	PUR
External cable diameter	5.9 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Thickness, outer sheath	approx. 0.5 mm
Conductor material	Bare Cu litz wires
Conductor structure signal line	32x 0.10 mm
AWG signal line	24
Conductor cross section	8x 0.25 mm ² (Signal line)
Material wire insulation	PP
Thickness, insulation	approx. 0.2 mm
Wire diameter incl. insulation	1.17 mm ±0.02 mm
Single wire, color	brown, white, green, yellow, gray, pink, blue, red
Overall twist	8 wires around filler to the core
Shielding	Tinned copper braided shield
Optical shield covering	85 %
Nominal voltage, cable	≤ 300 V AC
Test voltage Core/Shield	≥ 2000 V AC (for 60 s)
Test voltage, cable	≥ 3000 V AC (Spark test)
Cable resistance	≤ 78 Ω/km (at 20 °C)
Cable insulation resistance	≥ 1 GΩ*km (at 20 °C)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Number of bending cycles	2000000

SAC-8P-M12MS SH/.../... - Sensor/actuator cable




1522804

<https://www.phoenixcontact.com/in/products/1522804>

Minimum bending radius, drag chain applications	10 x D
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s ²
Halogen-free	in accordance with DIN VDE 0472 part 815 according to IEC 60754-1
Resistance to oil	in accordance with IEC 60811-404
Flame resistance	in acc. with UL FT-2 according to UL 758/1581 (horizontal) in accordance with UL 758/1581 FT2 According to DIN EN 60332-2-2 (20 s)
Other resistance	hydrolysis and microbe resistant Resistant to salt water low-abrasion partly UV-resistant in accordance with DIN EN ISO 4892-2-A
Special properties	Flexible cable conduit capable
Ambient temperature (operation)	-25 °C ... 80 °C (Cable, flexible installation) -40 °C ... 80 °C (cable, fixed installation)

PUR halogen-free gray [280]

Dimensional drawing	
Shielded	yes
UL AWM Style	20549 / 10493 (80°C/300 V)
Cable weight	53 kg/km
Cable type	PUR halogen-free gray
Short symbol	LiY-FC11Y
Cable type (abbreviation)	280
External cable diameter	5.9 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	gray RAL 7001
Thickness, outer sheath	approx. 0.5 mm
Conductor material	Bare Cu litz wires
Conductor structure signal line	32x 0.10 mm
AWG signal line	24
Conductor cross section	8x 0.25 mm ² (Signal line)
Material wire insulation	PP
Thickness, insulation	approx. 0.2 mm

SAC-8P-M12MS SH/.../... - Sensor/actuator cable




1522804

<https://www.phoenixcontact.com/in/products/1522804>

Wire diameter incl. insulation	1.17 mm ±0.02 mm
Single wire, color	brown, white, green, yellow, gray, pink, blue, red
Overall twist	8 wires around filler to the core
Shielding	Tinned copper braided shield
Optical shield covering	85 %
Nominal voltage, cable	≤ 300 V AC
Test voltage Core/Shield	≥ 2000 V AC (for 60 s)
Test voltage, cable	≥ 3000 V AC (Spark test)
Cable resistance	≤ 78 Ω/km (at 20 °C)
Cable insulation resistance	≥ 1 GΩ*km (at 20 °C)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Number of bending cycles	2000000
Minimum bending radius, drag chain applications	10 x D
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s ²
Halogen-free	in accordance with DIN VDE 0472 part 815 according to IEC 60754-1
Resistance to oil	in accordance with DIN EN 60811-404
Flame resistance	in acc. with UL FT-2 according to UL 758/1581 (horizontal) in accordance with UL 758/1581 FT2 According to DIN EN 60332-2-2 (20 s)
Other resistance	hydrolysis and microbe resistant Resistant to salt water low-abrasion
Special properties	Flexible cable conduit capable
Ambient temperature (operation)	-25 °C ... 80 °C (Cable, flexible installation) -40 °C ... 80 °C (cable, fixed installation)

PVC black [PVC]

Dimensional drawing	
Note	The cable is not suitable for use with drag chains.
Shielded	yes
UL AWM Style	2517
Cable weight	85 kg/km

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

Cable type	PVC black
Short symbol	LiYF-C-Y
Cable type (abbreviation)	PVC
External cable diameter	7.7 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Conductor structure signal line	32x 0.10 mm
AWG signal line	24
Conductor cross section	8x 0.25 mm ² (Signal line)
Material, filler	PVC
Material wire insulation	PVC
Thickness, insulation	≥ 0.38 mm (Conductor insulation, signal line)
Wire diameter incl. insulation	1.5 mm ±0.05 mm (Signal line)
Single wire, color	white, brown, green, yellow, gray, pink, blue, red
Overall twist	8 wires around filler to the core, twisted in with additional Cu litz in the wire outer godet
Shielding	Tinned copper braided shield
Optical shield covering	85 %
Nominal voltage, cable	300 V
Test voltage, cable	3000 V
Cable resistance	≤ 78 Ω/km
Cable insulation resistance	≥ 10 GΩ*km
Smallest bending radius, fixed installation	38.5 mm
Smallest bending radius, movable installation	77 mm
Resistance to oil	According to DIN EN 60811-2-1, 168 h at 80°C
Flame resistance	According to UL 758/1581 (Cable Flame) According to DIN EN 60332-1-2 (60 s)
Ambient temperature (operation)	-25 °C ... 105 °C (cable, fixed installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)

Standards and regulations

Standards/specifications	IEC 61076-2-101
--------------------------	-----------------


SAC-8P-M12MS SH/.../... - Sensor/actuator cable

1522804

<https://www.phoenixcontact.com/in/products/1522804>


Drawings

Dimensional drawing

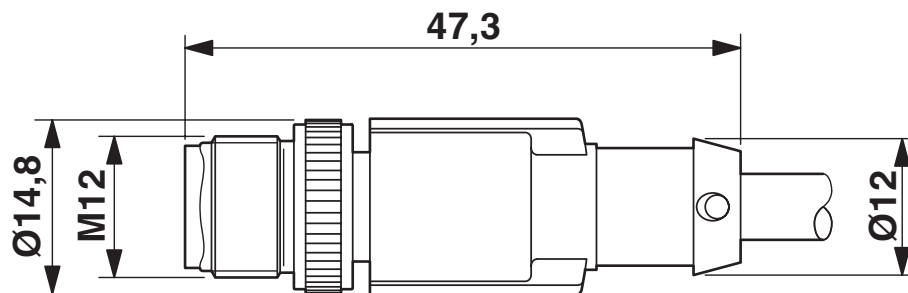

Plug, M12 x 1, straight, shielded

Schematic diagram

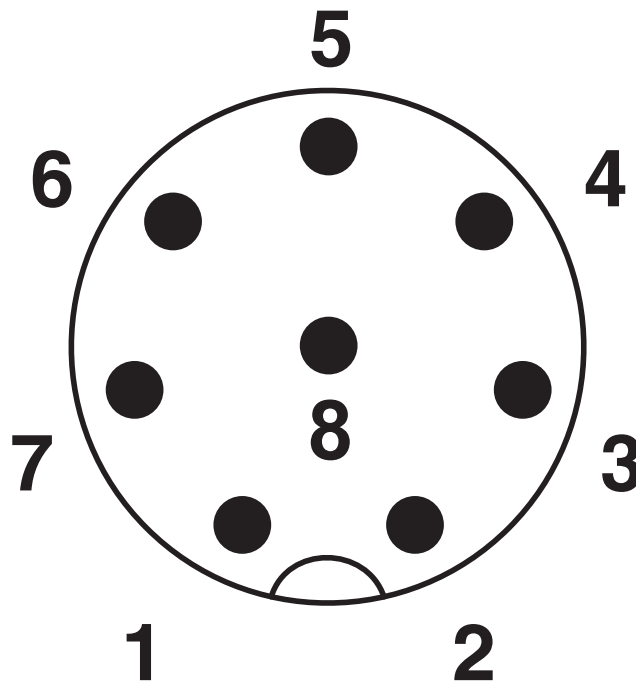

Pin assignment M12 plug, 8-pos., view plug side


SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

Circuit diagram

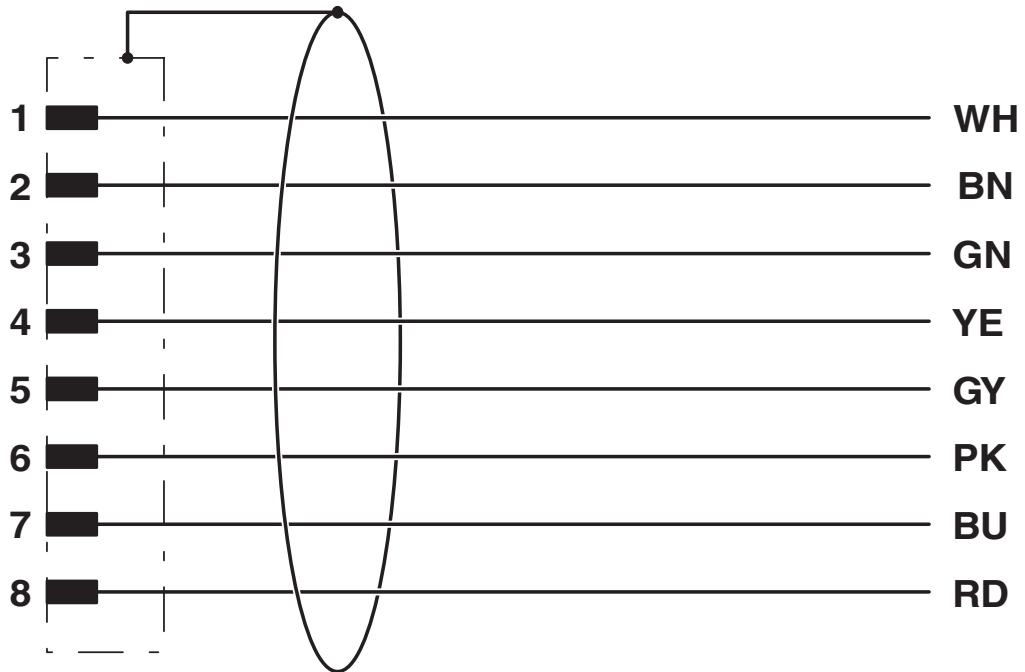

SAC-8P-M12MS SH/.../... - Sensor/actuator cable




1522804

<https://www.phoenixcontact.com/in/products/1522804>

Approvals

 UL Listed Approval ID: FILE E 221474				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	2 A	-	-

 cUL Listed Approval ID: FILE E 221474				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	2 A	-	-

 EAC Approval ID: RU D-DE.HB35.B.00387	
---	--

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

Accessories

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/in/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



SAC-M12-EXCLIP-M - Locking clip

1558988

<https://www.phoenixcontact.com/in/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

PABA WH/23 - Insert label

1013779

<https://www.phoenixcontact.com/in/products/1013779>



Insert label, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

PABA YE/23 - Insert label

1013782

<https://www.phoenixcontact.com/in/products/1013782>



Insert label, Strip, yellow, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/in/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/in/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

WIREFOX SAC-1 - Stripping tool

1212757

<https://www.phoenixcontact.com/in/products/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/in/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/in/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

WP-CTA POM 13,0 BK - Protective hose adapter

1422884

<https://www.phoenixcontact.com/in/products/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

SAC-8P-M12MS SH/.../... - Sensor/actuator cable

1522804

<https://www.phoenixcontact.com/in/products/1522804>

WP-PA HF 13,0 BK - Protective hose

3240681

<https://www.phoenixcontact.com/in/products/3240681>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

WP-PA HF-HB 13,0 BK - Protective hose

3240839

<https://www.phoenixcontact.com/in/products/3240839>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/in/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/in/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

SAC-8P-M12MS SH/.../... - Sensor/actuator cable



1522804

<https://www.phoenixcontact.com/in/products/1522804>

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/in/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/in/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in