Product data sheet

Specifications





Empty pendant control station, Harmony XAC, plastic, yellow, 6 cut outs

XACA06

Main

Range of product	Harmony XAC			
Product or component type	Pendant control station			
Device short name	XACA			

Complementary						
Control station type	Double insulated					
Enclosure material	Polypropylene					
Electrical circuit type	Control circuit					
Enclosure type	Empty enclosure					
Number of cut-out	6 cut-outs					
Control station colour	Yellow					
Cable entry	Rubber sleeve with stepped entry 826 mm					
Guard rail	Without					
Vertical operator cut-out centre	30 mm					
Standards	EN/IEC 60204-32 UL 508 CSA C22.2 No 14 EN/IEC 60947-5-1					
Product certifications	GOST CCC					
Protective treatment	TH					
Ambient air temperature for operation	-2570 °C					
Ambient air temperature for storage	-4070 °C					
Vibration resistance	15 gn (f= 10500 Hz) conforming to IEC 60068-2-6					
Shock resistance	100 gn conforming to IEC 60068-2-27					
Overvoltage category	Class II conforming to IEC 61140					
IP degree of protection	IP65 conforming to IEC 60529					
IK degree of protection	IK08 conforming to EN 50102					
Mechanical durability	1000000 cycles					
Net weight	0.665 kg					

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.500 cm
Package 1 Width	9.000 cm
Package 1 Length	57.000 cm
Package 1 Weight	743.000 g
Unit Type of Package 2	P06
Number of Units in Package 2	40
Package 2 Height	73.500 cm
Package 2 Width	80.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	42.720 kg

Offer Sustainability

Sustainable offer status	Green Premium product					
REACh Regulation	REACh Declaration					
REACh free of SVHC	Yes					
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration					
Toxic heavy metal free	Yes					
Mercury free	Yes					
China RoHS Regulation	China RoHS declaration					
RoHS exemption information	Yes					
Environmental Disclosure	Product Environmental Profile					
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov					

Contractual warranty

Warranty 18 months


Product data sheet

Dimensions Drawings

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.



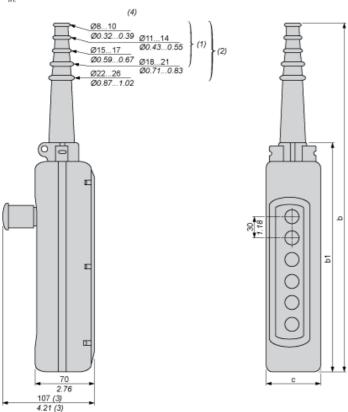

- For 2 and 3-way XAC A stations. For 4 to 8-way XAC A stations. With trigger action Emergency stop head operator
- (1) (2) (3) (4) Internal ø

Dimensions in mm

Number of cut-outs	2	3	4	5	6	8	12
b	314	314	440	440	500	560	680
b1	190	190	250	250	310	370	490
С	80	80	80	80	80	80	92

Dimensions in in.

Number of cut-outs	2	3	4	5	6	8	12
b	12.36	12.36	17.32	17.32	19.68	22.05	26.77
b1	7.48	7.48	9.84	9.84	12.20	14.57	19.29
С	3.15	3.15	3.15	3.15	3.15	3.15	3.62

Recommended replacement(s)