

VIP-3/SC/D37SUB/F - Interface module



2315191

<https://www.phoenixcontact.com/in/products/2315191>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



VARIOFACE module, with screw connection and D-SUB 37 socket connector, for mounting on NS 35 rails

Your advantages

- 9-pos. ... 50-pos.
- Metal foot
- In accordance with IEC 60603-13
- Screw connection
- 1:1 connection

Commercial Data

Item number	2315191
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CK2
Product Key	CK2421
Catalog Page	Page 553 (C-5-2019)
GTIN	4046356312943
Weight per Piece (including packing)	196 g
Weight per Piece (excluding packing)	178 g
Customs tariff number	85366990
Country of origin	US

2315191

<https://www.phoenixcontact.com/in/products/2315191>

Technical Data

Product properties

Product type	Interface module
Product family	VARIOFACE Professional
Number of positions	37
No. of channels	37

Insulation characteristics

Overvoltage category	II
Pollution degree	2

Electrical properties

No. of channels	37
Nominal voltage U_N	25 V AC
	60 V DC
Max. current carrying capacity per branch	2 A
Rated surge voltage	1.2 kV

Connection data

Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Controller level

Connection method	D-SUB socket strip
Number of connections	1
Number of positions	37

Signaling

Status display	No
Status display present	No

Dimensions

Width	72.7 mm
Height	69 mm
Depth	62 mm

Material specifications

VIP-3/SC/D37SUB/F - Interface module



2315191

<https://www.phoenixcontact.com/in/products/2315191>

Flammability rating according to UL 94	V0
Housing insulation material	Polyamide 6.6 green

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

VIP-3/SC/D37SUB/F - Interface module


2315191

<https://www.phoenixcontact.com/in/products/2315191>



Drawings

Circuit diagram

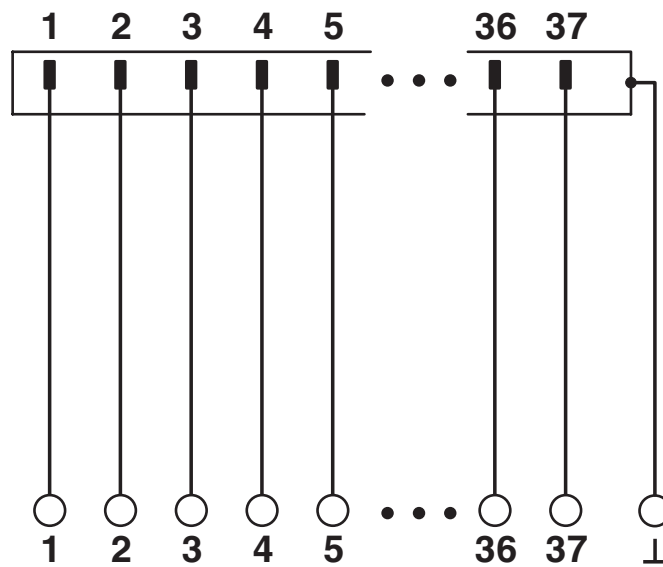

VIP-3/SC/D37SUB/F - Interface module




2315191

<https://www.phoenixcontact.com/in/products/2315191>


Approvals


 CSA Approval ID: 2122203				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	105 V	2 A	28 - 14	-

 cUL Recognized Approval ID: FILE E 238705				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	2 A	30 - 12	-

 UL Recognized Approval ID: FILE E 238705				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	2 A	30 - 12	-

 EAC Approval ID: EAC-Zulassung				
--	--	--	--	--

 EAC Approval ID: RU C-DE.A*30.B.01742				
---	--	--	--	--

 CSAus Approval ID: 2122203				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	105 V	2 A	28 - 14	-

VIP-3/SC/D37SUB/F - Interface module



2315191

<https://www.phoenixcontact.com/in/products/2315191>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-12.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

VIP-3/SC/D37SUB/F - Interface module



2315191

<https://www.phoenixcontact.com/in/products/2315191>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

Accessories

CABLE D-SUB-S/.../.../... - Cable

2302340

<https://www.phoenixcontact.com/in/products/2302340>



Shielded round cable, assembled with one D-SUB female and pin strip (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

CABLE D-SUB-S-S-S/.../.../... - Cable

2302434

<https://www.phoenixcontact.com/in/products/2302434>



Shielded round cable, assembled with two D-SUB pin strips (9-, 15-, 25-, 37-, or 50-pos.), variable cable length

VIP-3/SC/D37SUB/F - Interface module



2315191

<https://www.phoenixcontact.com/in/products/2315191>

UC-TM 4 - Marker for terminal blocks

0818111

<https://www.phoenixcontact.com/in/products/0818111>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 10.5 mm, Number of individual labels: 120

UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/in/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/in/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

ZB 5,08:UNBEDRUCKT - Zack marker strip

0809793

<https://www.phoenixcontact.com/in/products/0809793>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.08 mm, lettering field size: 4.98 x 10.5 mm, Number of individual labels: 10

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

ZB 22:UNBEDRUCKT - Zack marker strip

0811862

<https://www.phoenixcontact.com/in/products/0811862>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 22 mm, lettering field size: 10.5 x 21.8 mm, Number of individual labels: 4

CABLE-D37SUB/B/S/ 50/KONFEK/S - Cable

2302191

<https://www.phoenixcontact.com/in/products/2302191>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 0.5 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/B/S/100/KONFEK/S - Cable

2302201

<https://www.phoenixcontact.com/in/products/2302201>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 1 m

CABLE-D37SUB/B/S/150/KONFEK/S - Cable

2302214

<https://www.phoenixcontact.com/in/products/2302214>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 1.5 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/B/S/200/KONFEK/S - Cable

2302227

<https://www.phoenixcontact.com/in/products/2302227>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 2 m

CABLE-D37SUB/B/S/300/KONFEK/S - Cable

2302230

<https://www.phoenixcontact.com/in/products/2302230>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 3 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/B/S/400/KONFEK/S - Cable

2302243

<https://www.phoenixcontact.com/in/products/2302243>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 4 m

CABLE-D37SUB/B/S/600/KONFEK/S - Cable

2302256

<https://www.phoenixcontact.com/in/products/2302256>



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 6 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/B/S/HF/S/ 1,0M - Cable

1066608

<https://www.phoenixcontact.com/in/products/1066608>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 1 m

CABLE-D37SUB/B/S/HF/S/ 2,0M - Cable

1066609

<https://www.phoenixcontact.com/in/products/1066609>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 2 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/B/S/HF/S/ 3,0M - Cable

1066611

<https://www.phoenixcontact.com/in/products/1066611>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 3 m

CABLE-D37SUB-B-S-HF-S/... - Cable

1075562

<https://www.phoenixcontact.com/in/products/1075562>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: variable

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/S/S/100/KONFEK/S - Cable

2305664

<https://www.phoenixcontact.com/in/products/2305664>



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 37-position);
connection 2: D-SUB pin strip (1x 37-position); cable length: 1 m

CABLE-D37SUB/S/S/200/KONFEK/S - Cable

2305677

<https://www.phoenixcontact.com/in/products/2305677>



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 37-position);
connection 2: D-SUB pin strip (1x 37-position); cable length: 2 m

VIP-3/SC/D37SUB/F - Interface module



2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/S/S/300/KONFEK/S - Cable

2305680

<https://www.phoenixcontact.com/in/products/2305680>



Assembled shielded round cable; connection 1: D-SUB pin strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 3 m

CABLE-D37SUB/S/S/HF/S/ 1,0M - Cable

1066612

<https://www.phoenixcontact.com/in/products/1066612>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 1 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB/S/S/HF/S/ 2,0M - Cable

1066614

<https://www.phoenixcontact.com/in/products/1066614>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 2 m

CABLE-D37SUB/S/S/HF/S/ 3,0M - Cable

1066615

<https://www.phoenixcontact.com/in/products/1066615>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: 3 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D37SUB-S-S-HF-S/... - Cable

1075561

<https://www.phoenixcontact.com/in/products/1075561>



Assembled, shielded, halogen-free round cable; connection 1: D-SUB pin strip (1x 37-position); connection 2: D-SUB pin strip (1x 37-position); cable length: variable

CABLE-D-37SUB/M/OE/0,25/S/0,5M - Cable

2926577

<https://www.phoenixcontact.com/in/products/2926577>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: 0.5 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D-37SUB/M/OE/0,25/S/1,0M - Cable

2926580

<https://www.phoenixcontact.com/in/products/2926580>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: 1 m

CABLE-D-37SUB/M/OE/0,25/S/1,5M - Cable

2926593

<https://www.phoenixcontact.com/in/products/2926593>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: 1.5 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D-37SUB/M/OE/0,25/S/2,0M - Cable

2926603

<https://www.phoenixcontact.com/in/products/2926603>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: 2 m

CABLE-D-37SUB/M/OE/0,25/S/3,0M - Cable

2926616

<https://www.phoenixcontact.com/in/products/2926616>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: 3 m

VIP-3/SC/D37SUB/F - Interface module

2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D-37SUB/M/OE/0,25/S/4,0M - Cable

2926629

<https://www.phoenixcontact.com/in/products/2926629>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: 4 m

CABLE-D-37SUB/M/OE/0,25/S/6,0M - Cable

2926632

<https://www.phoenixcontact.com/in/products/2926632>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: 6 m

VIP-3/SC/D37SUB/F - Interface module



2315191

<https://www.phoenixcontact.com/in/products/2315191>

CABLE-D-37SUB-M-OE-0,25-S/... - Cable

2900912

<https://www.phoenixcontact.com/in/products/2900912>



Assembled shielded round cable; connection 1: Single wires (37-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 37-position); cable length: variable

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in