


NBC-R4AC/3,0-94Z/R4AC - Network cable



1403930

<https://www.phoenixcontact.com/in/products/1403930>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Assembled Ethernet cable, shielded, 4-pair, 26 AWG stranded (7-wire), RAL 5021 (water blue), RJ45 plug/IP20 to RJ45 plug/IP20, line, length: 3 m

Commercial Data

| | |
|--------------------------------------|---------------------|
| Item number | 1403930 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales Key | ABN |
| Product Key | ABNABM |
| Catalog Page | Page 386 (C-2-2019) |
| GTIN | 4046356673976 |
| Weight per Piece (including packing) | 166.26 g |
| Weight per Piece (excluding packing) | 157.8 g |
| Customs tariff number | 85444210 |
| Country of origin | CN |

NBC-R4AC/3,0-94Z/R4AC - Network cable



1403930

<https://www.phoenixcontact.com/in/products/1403930>

Technical Data

Product properties

| | |
|----------------------|-------------------------|
| Product type | Data cable preassembled |
| Number of positions | 8 |
| No. of cable outlets | 1 |
| Cable outlet | straight |

Insulation characteristics

| | |
|---------------------|---|
| Degree of pollution | 2 |
|---------------------|---|

Electrical properties

| | |
|-----------------------|-----------|
| Rated voltage (III/3) | 72 V (DC) |
| Transmission medium | Copper |

Mechanical properties

Mechanical data

| | |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 750 |
|-----------------------------|-------|

Material specifications

| | |
|--|----|
| Flammability rating according to UL 94 | V2 |
|--|----|

Connector

Connection 1

| | |
|-----------------------------|--|
| Type | Plug straight RJ45 |
| Handle color | gray |
| Material | CuSn (Contact) Ni/Au (Contact surface) PC (Contact carriers) PA (Housing) |
| Insertion/withdrawal cycles | ≥ 750 |
| Degree of protection | IP20 |

Connection 2

| | |
|-----------------------------|--|
| Type | Plug straight RJ45 |
| Handle color | gray |
| Material | CuSn (Contact) Ni/Au (Contact surface) PC (Contact carriers) PA (Housing) |
| Insertion/withdrawal cycles | ≥ 750 |

Cable/line

| | |
|--------------|--------|
| Cable length | 3.00 m |
|--------------|--------|

NBC-R4AC/3,0-94Z/R4AC - Network cable



1403930

<https://www.phoenixcontact.com/in/products/1403930>

Ethernet flexible CAT5, 4-pair, SF/UTP [94Z]

| | |
|---|--|
| Shielded | yes |
| Cable type | Ethernet flexible CAT5, 4-pair, SF/UTP |
| Cable type (abbreviation) | 94Z |
| Signal type/category | Ethernet CAT5 (IEC 11801), 1 Gbps |
| Cable structure | 4x2xAWG26/7; SF/UTP |
| External cable diameter | 6.2 mm ±0.2 mm |
| Outer sheath, material | PUR |
| External sheath, color | water blue RAL 5021 |
| Conductor material | Bare Cu litz wires |
| Conductor structure signal line | 7x 0.16 mm |
| AWG signal line | 26 |
| Conductor cross section | 4x 2x 0.14 mm ² |
| Material wire insulation | PE |
| Thickness, insulation | 0.19 mm (Signal line) |
| Wire diameter incl. insulation | 0.92 mm |
| Single wire, color | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown |
| Twisted pairs | 2 cores to the pair |
| Overall twist | 4 pairs |
| Shielding | Tinned copper braided shield |
| Optical shield covering | 85 % |
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700 V (50 Hz, 1 min.) |
| Cable resistance | ≤ 290 Ω/km (at 20 °C) |
| Cable insulation resistance | ≥ 500 MΩ*km (at 20 °C) |
| Wave impedance | 100 Ω ±15 Ω (at 100 MHz) |
| Smallest bending radius, fixed installation | 51.2 mm |
| Smallest bending radius, movable installation | 51.2 mm |
| Halogen-free | according to IEC 60754-1 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Flame resistance | IEC 60332-1-2 |

Environmental and real-life conditions

Ambient conditions

| | |
|---------------------------------|-----------------------------------|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -20 °C ... 70 °C (RJ45 connector) |

NBC-R4AC/3,0-94Z/R4AC - Network cable


1403930

<https://www.phoenixcontact.com/in/products/1403930>



Drawings

Schematic diagram

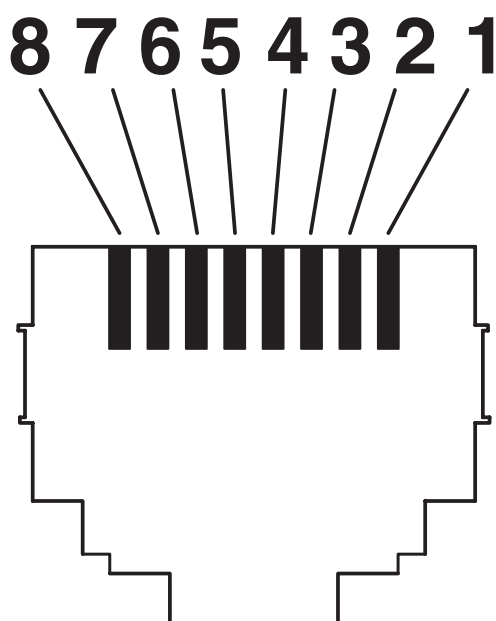

Connector pin assignment plug RJ45


NBC-R4AC/3,0-94Z/R4AC - Network cable




1403930

<https://www.phoenixcontact.com/in/products/1403930>

Circuit diagram

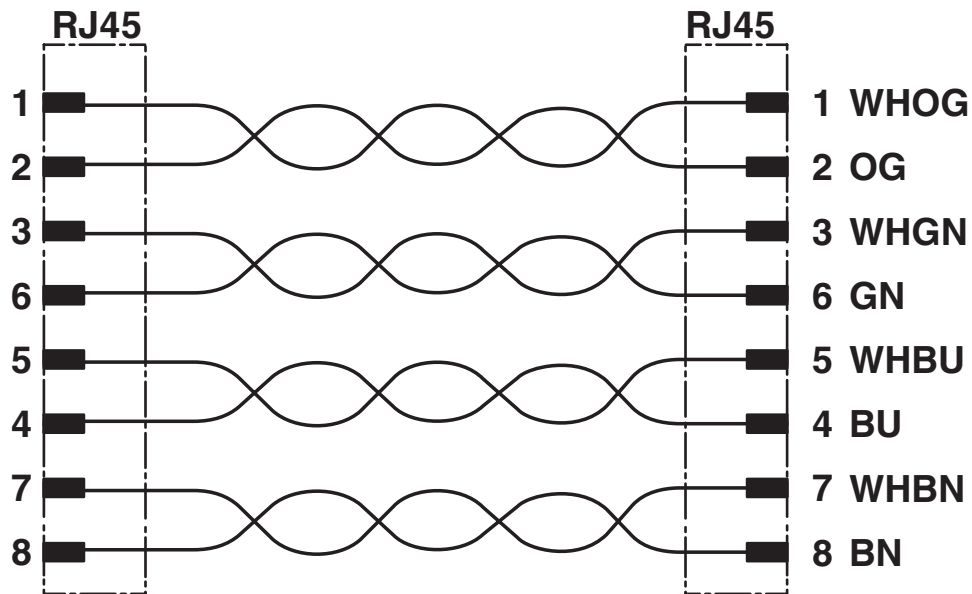

Dimensional drawing

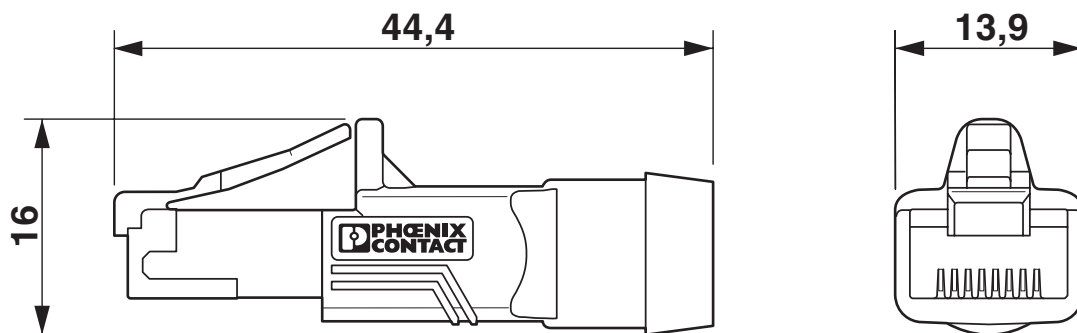

RJ45 connector, IP20

NBC-R4AC/3,0-94Z/R4AC - Network cable



1403930

<https://www.phoenixcontact.com/in/products/1403930>

Approvals

EAC EAC
Approval ID: 19060508

EAC EAC
Approval ID: B.00385/20

NBC-R4AC/3,0-94Z/R4AC - Network cable



1403930

<https://www.phoenixcontact.com/in/products/1403930>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060308 |
| ECLASS-12.0 | 27060308 |
| ECLASS-13.0 | 27060308 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC002599 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

NBC-R4AC/3,0-94Z/R4AC - Network cable



1403930

<https://www.phoenixcontact.com/in/products/1403930>

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in