


Series
NSX

SIZE 12 REAR RELEASE, REAR REMOVABLE CRIMP SOCKET CONTACT

Issue:
Oct. 26, 2020

Page
1/1

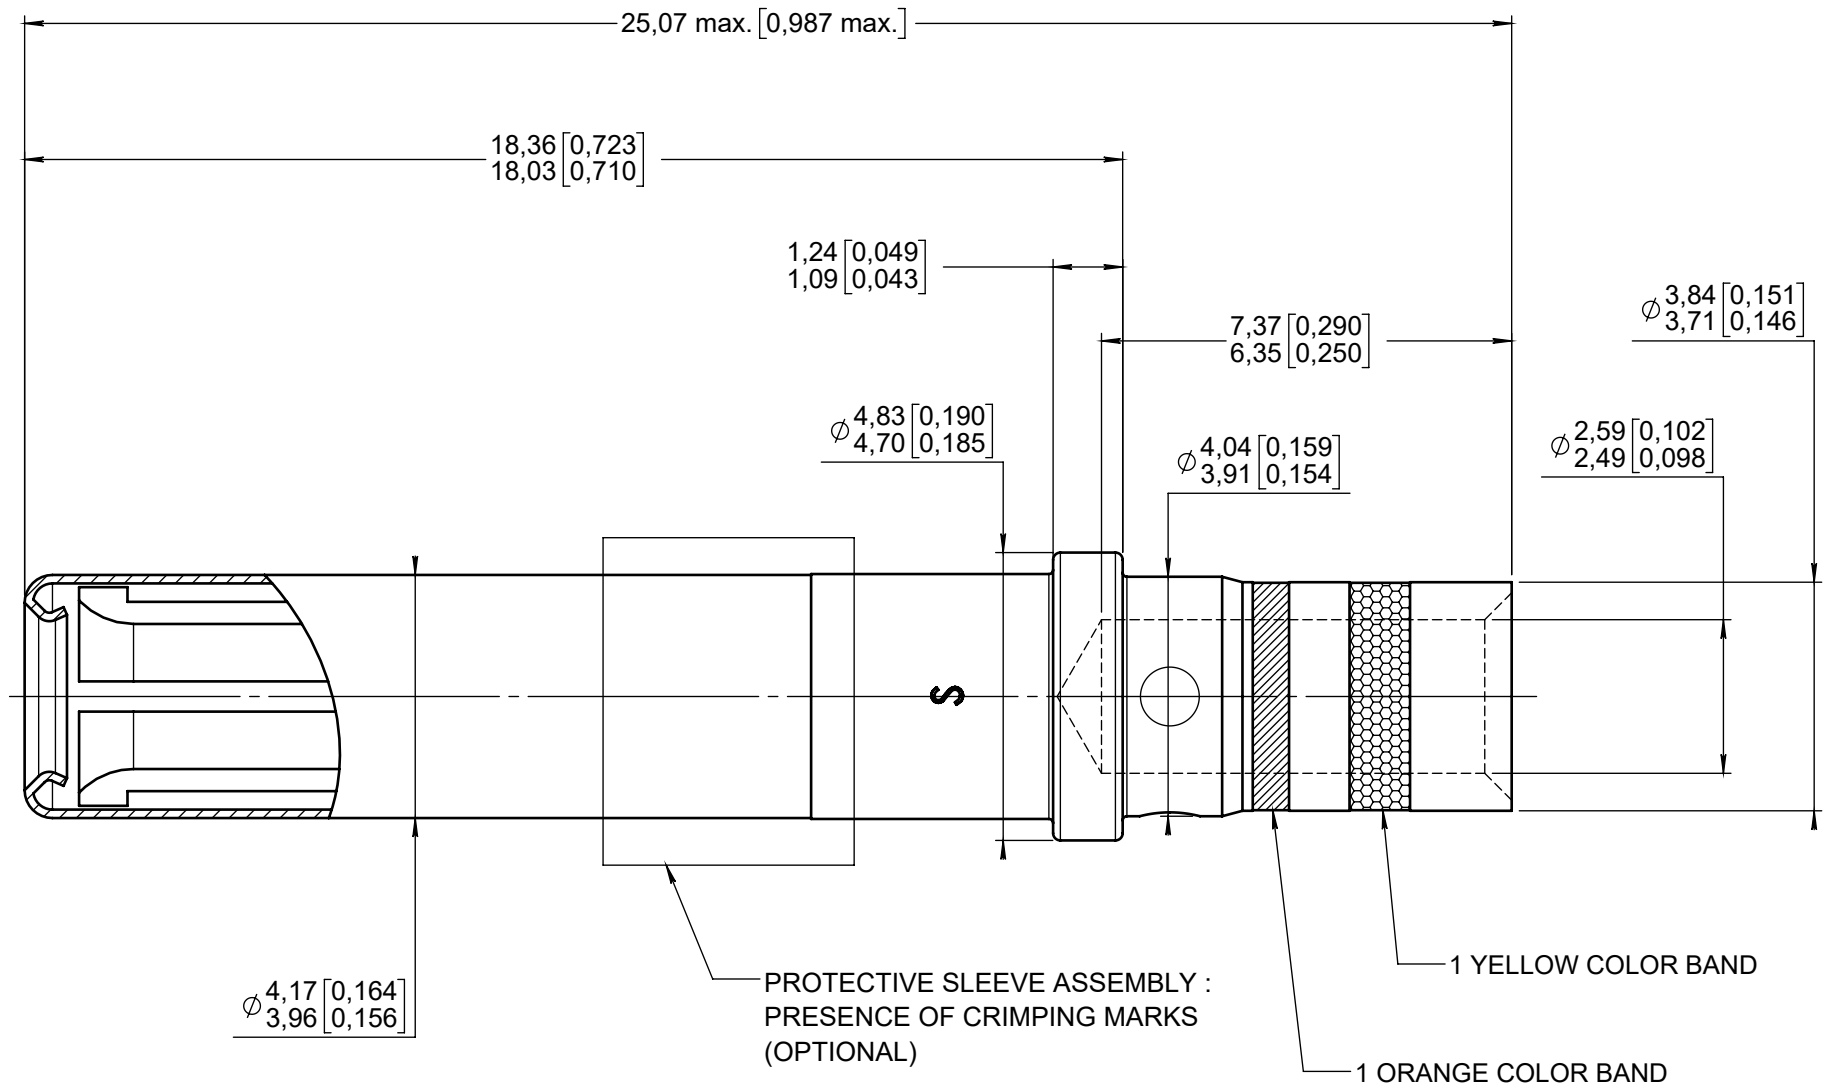

MATERIALS :

CONTACT BODY : BERYLLIUM COPPER PER ASTM B 196

PROTECTIVE SLEEVE : STAINLESS STEEL

FINISH :

CONTACT BODY : PLATING .00005 INCH OF GOLD PER SAE AMS-2422 OVER NICKEL PER SAE AMS-QQ-N-290
CONTACT PROTECTIVE SLEEVE : PASSIVATED

WIRES ACCOMODATED : AWG 12-14-16

INSULATION DIAMETER : 0.135 MAX
STRIP LENGTH : 0.236

TOOLING :

CRIMPING TOOL : M22520/1-01 RADIALL 282 291

SELECTOR POSITION : 8 FOR AWG 12


7 FOR AWG 14

6 FOR AWG 16

POSITIONER : M22520/1-02 RADIALL 282 972

INSERTION AND EXTRACTION TOOL : M81969/28-02 RADIALL (282 547) OR M81969/14-04 (RADIALL 282549004)

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 1.47 g

CREATION

PEN: /

NOM: FALETTI L.

DATE: April 26, 1983

APPR.: /

Issue	Revisions	Name	Approved
Oct. 26, 20	Added note about protective sleeve assembly	BRANJONNEAU	LEGENBRE
Jan. 26, 2018	Added dimensions in millimeters (mm)	Lopez C.	Legendre T.
Nov. 07, 2014	Added M81969/14-04 (RADIALL 282549004)	Zuniga	Dupuis
Mar. 08, 2012	Material updated	Moutault	Dupuis
Apr. 12, 1996	Added "REAR RELEASE, REAR REMOVABLE"	Moutault	Brochet
Apr. 12, 1996	Redrawn	Valgresy	/

620340EN

RADIALL PROPRIETARY INFORMATION

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311