

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Sensor/actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12, coding: A, on free cable end, cable length: 1.5 m

## Your advantages

- Easy and safe: 100% electrically tested plug-in components

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1668043             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales Key                            | BF1                 |
| Product Key                          | BF1CCA              |
| Catalog Page                         | Page 194 (C-2-2019) |
| GTIN                                 | 4017918136659       |
| Weight per Piece (including packing) | 50.4 g              |
| Weight per Piece (excluding packing) | 47 g                |
| Customs tariff number                | 85444290            |
| Country of origin                    | DE                  |

## Technical Data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Number of positions  | 4                     |
| Application          | Standard              |
| No. of cable outlets | 1                     |
| Shielded             | no                    |
| Coding               | A                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|  |   |
|--|---|
| Flammability rating according to UL 94 | HB  |
| Seal material                          | NBR   |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuSn  |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |

### Electrical properties

|                       |          |
|-----------------------|----------|
| Contact resistance    | ≤ 5 mΩ   |
| Insulation resistance | ≥ 100 MΩ |
| Nominal voltage $U_N$ | 250 V AC |
|                       | 250 V DC |
| Nominal current $I_N$ | 4 A      |
| Protective circuit    | unwired  |

### Mechanical properties

#### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|-------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | No |
| Status display present | No |

### Connection data

#### Conductor connection

|                   |                        |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|-------------------|------------------------|

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## Connector


### Connection 1

|             |   |
|-------------|---|
| Coding type | A |
|-------------|---|

## Cable/line

|              |       |
|--------------|-------|
| Cable length | 1.5 m |
|--------------|-------|

### PUR halogen-free black [PUR]

|   |  |
|---|--|
| Dimensional drawing                           |  |
| Cable weight                                  | 30 kg/km   |
| UL AWM Style                                  | 20549 / 10493 (80°C/300 V)   |
| Number of positions                           | 4  |
| Shielded                                      | no   |
| Cable type                                    | PUR halogen-free black [PUR]   |
| Conductor structure signal line               | 42x 0.10 mm  |
| AWG signal line                               | 22   |
| Conductor cross section                       | 4x 0.34 mm <sup>2</sup> (Signal line)  |
| Wire diameter incl. insulation                | 1.27 mm ±0.02 mm   |
| External cable diameter                       | 4.2 mm ±0.15 mm  |
| Outer sheath, material                        | PUR  |
| External sheath, color                        | black-gray RAL 7021  |
| Conductor material                            | Bare Cu litz wires   |
| Material wire insulation                      | PP   |
| Single wire, color                            | brown, white, blue, black  |
| Thickness, insulation                         | ≥ 0.21 mm  |
| Thickness, outer sheath                       | approx. 0.5 mm   |
| Overall twist                                 | 4 wires, twisted   |
| Max. conductor resistance                     | ≤ 58 Ω/km  |
| Insulation resistance                         | ≥ 1 GΩ*km  |
| Nominal voltage, cable                        | ≤ 300 V  |
| Test voltage                                  | ≥ 3000 V   |
| Minimum bending radius, fixed installation    | 5 x D  |
| Minimum bending radius, flexible installation | 10 x D   |
| Max. bending cycles                           | 10000000   |
| Halogen-free                                  | in accordance with DIN VDE 0472 part 815<br>in accordance with DIN EN 50267-2-1    |

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

|                                 |   |
|---------------------------------|---|
| Flame resistance                | in accordance with UL 758/1581 FT2                                  |
|                                 | DIN EN 60332-2-2 (20 s)   |
| Resistance to oil               | in accordance with DIN EN 60811-2-1                                 |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents          |
|                                 | hydrolysis and microbe resistant                                    |
|                                 | partly UV-resistant in accordance with DIN EN ISO 4892-2-A          |
|                                 | Low adhesion  |
| Special properties              | abrasion-resistant  |
|                                 | Flexible cable conduit capable                                      |
|                                 | Silicone-free   |
|                                 | Free of substances which would hinder coating with paint or varnish |
| Ambient temperature (operation) | flexible  |
|                                 | -40 °C ... 80 °C (cable, fixed installation)                        |
|                                 | -25 °C ... 80 °C (Cable, flexible installation)                     |

## Environmental and real-life conditions

### Ambient conditions


|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |

## Standards and regulations


|                          |                 |
|--------------------------|-----------------|
| Standards/specifications | IEC 61076-2-101 |
|--------------------------|-----------------|

Drawings

Circuit diagram

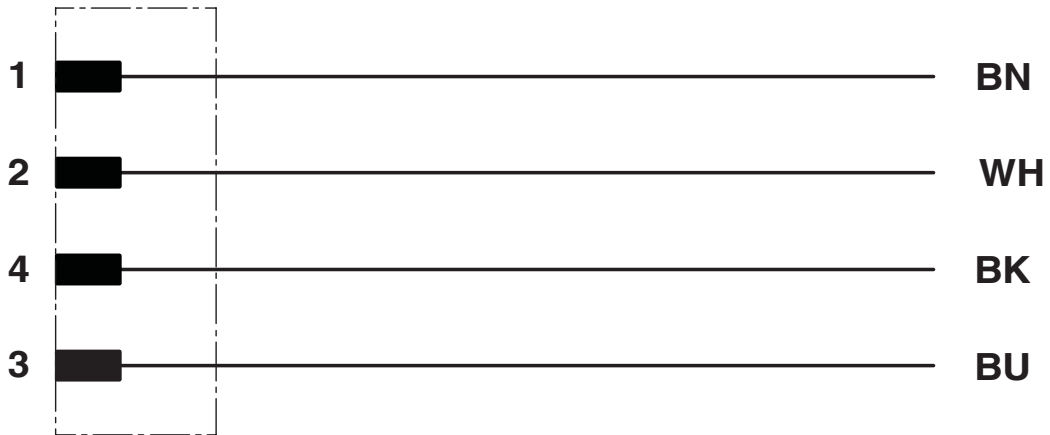

Schematic diagram

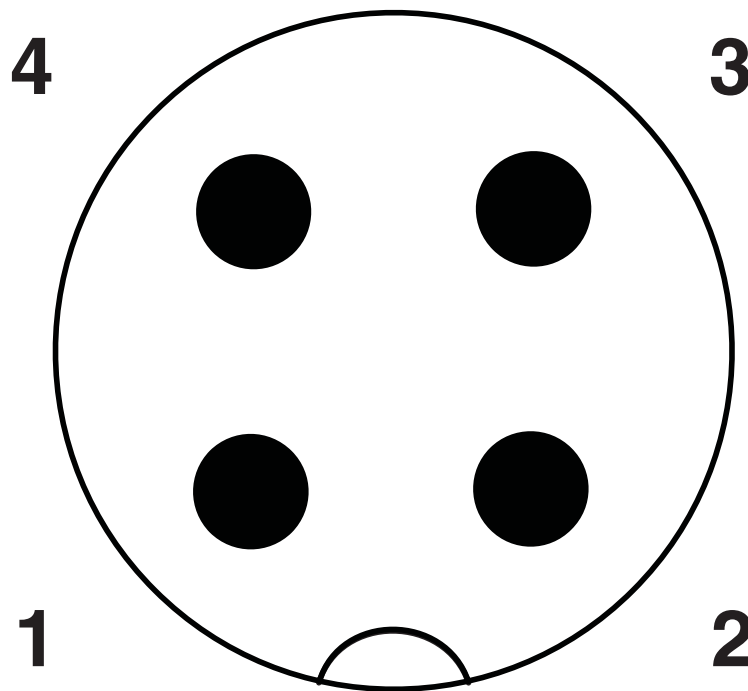


Pin assignment M12 plug, 4-pos., A-coded, view plug side

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable

1668043

<https://www.phoenixcontact.com/in/products/1668043>

Dimensional drawing

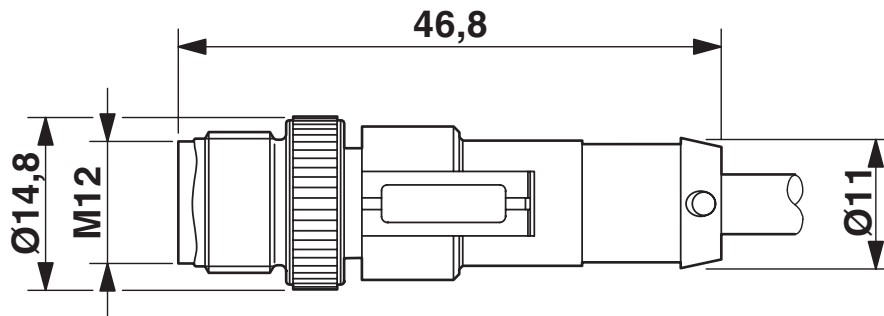

Plug, M12 x 1, straight, shielded

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## Approvals



### EAC

Approval ID: RU C-DE.BL08.B.00286



### UL Listed

Approval ID: FILE E 221474

|  | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 300 V                 | 4 A                   | -                 | -                           |



### cUL Listed

Approval ID: FILE E 221474

|  | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 300 V                 | 4 A                   | -                 | -                           |



### EAC

Approval ID: RU D-DE.HB35.B.00387

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|



# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## Accessories

### PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/in/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



---

### SAC-M12-EXCLIP-M - Locking clip

1558988

<https://www.phoenixcontact.com/in/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## PABA WH/23 - Insert label

1013779

<https://www.phoenixcontact.com/in/products/1013779>



Insert label, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

---

## PABA YE/23 - Insert label

1013782

<https://www.phoenixcontact.com/in/products/1013782>



Insert label, Strip, yellow, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/in/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/in/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## WIREFOX SAC-1 - Stripping tool

1212757

<https://www.phoenixcontact.com/in/products/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

---

## WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/in/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/in/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

## WP-CTA POM 13,0 BK - Protective hose adapter

1422884

<https://www.phoenixcontact.com/in/products/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable

1668043

<https://www.phoenixcontact.com/in/products/1668043>

## WP-PA HF 13,0 BK - Protective hose

3240681

<https://www.phoenixcontact.com/in/products/3240681>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

---

## WP-PA HF-HB 13,0 BK - Protective hose

3240839

<https://www.phoenixcontact.com/in/products/3240839>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/in/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---

## TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/in/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm



# SAC-4P-M12MS/ 1,5-PUR - Sensor/actuator cable



1668043

<https://www.phoenixcontact.com/in/products/1668043>

## TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/in/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

## SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/in/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.  
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420  
[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)