

3004126

https://www.phoenixcontact.com/in/products/3004126

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type:  $G / 5 \times 20 / 5 \times 25 / 5 \times 30$ , nom. voltage: 24 V, nominal current: 6.3 A, number of positions: 1, connection method: Screw connection, Rated cross section: 1 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, NS 32, color: black

### Your advantages

- · Versions with LED
- · Large-surface marking
- · Safety lever locked in end position

### Commercial Data

| Item number                          | 3004126             |
|--------------------------------------|---------------------|
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales Key                            | BE1                 |
| Product Key                          | BE1234              |
| Catalog Page                         | Page 492 (C-1-2019) |
| GTIN                                 | 4017918090647       |
| Weight per Piece (including packing) | 19.43 g             |
| Weight per Piece (excluding packing) | 19 g                |
| Customs tariff number                | 85369095            |
| Country of origin                    | IN                  |



3004126

https://www.phoenixcontact.com/in/products/3004126

### **Technical Data**

### Notes

| Note regarding marking | For terminal marking, please use marking material with 8.2 mm pitch.  |
|------------------------|---|
| Note regarding marking | For lever marking, please use marking material with 6.2 mm pitch.   |
| Notes on operation     | The current is determined by the fuse used, the voltage by the selected LED.  If the fuse is faulty, the downstream circuit will not be disconnected. |

### Product properties

| Product type               | Fuse terminal block |
|----------------------------|---------------------|
| Number of positions        | 1                   |
| Number of connections      | 2                   |
| Number of rows             | 1                   |
| Potentials                 | 1                   |
| Insulation characteristics |                     |
| Overvoltage category       | III                 |

3

# Electrical properties

Degree of pollution

| Fuse type                                       | Glass / ceramics /           |
|---|------------------------------|
| Rated surge voltage                             | 8 kV                         |
| Maximum power dissipation for nominal condition | 1.02 W                       |
| Fuse  | G / 5 x 20 / 5 x 25 / 5 x 30 |
| LED voltage range                               | 15 V AC/DC 30 V AC/DC        |
| LED current range                               | 3.5 mA 8.1 mA                |

### Input data

| LED voltage range | 15 V AC/DC 30 V AC/DC |
|-------------------|-----------------------|
|-------------------|-----------------------|

### Connection data

| Number of connections per level | 2     |
|---------------------------------|-------|
| Nominal cross section           | 4 mm² |

### Level 1 above 1 below 1

| Level 1 above 1 below 1          |                                       |
|----------------------------------|---------------------------------------|
| Screw thread                     | M3                                    |
| Tightening torque                | 0.6 0.8 Nm                            |
| Stripping length                 | 8 mm                                  |
| Internal cylindrical gage        | A4                                    |
| Connection in acc. with standard | IEC 60947-7-3                         |
| Conductor cross section rigid    | 0.2 mm <sup>2</sup> 4 mm <sup>2</sup> |
| Cross section AWG                | 24 12 (converted acc. to IEC)         |



3004126

https://www.phoenixcontact.com/in/products/3004126

| Conductor cross section flexible  | 0.2 mm <sup>2</sup> 4 mm <sup>2</sup>              |
|---|--|
| Conductor cross section, flexible [AWG]   | 24 12 (converted acc. to IEC)                      |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.25 mm² 4 mm²                                     |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.25 mm² 4 mm²                                     |
| Cross-section with insertion bridge, rigid  | 4 mm²  |
| Cross-section with insertion bridge, flexible   | 4 mm²  |
| 2 conductors with same cross section, solid   | 0.2 mm² 1.5 mm²                                    |
| 2 conductors with same cross section, flexible  | 0.2 mm² 1.5 mm²                                    |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm² 1.5 mm²                                   |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm² 1.5 mm²                                    |
| Nominal current   | 6.3 A  |
| Maximum load current  | 6.3 A (the current is determined by the fuse used) |
| Nominal voltage   | 24 V   |
| Nominal cross section   | 1 mm²  |
| Connection in acc. with standard  | IEC 60947-7-3                                      |
| Conductor cross section rigid   | 0.2 mm² 4 mm²                                      |
| Cross section AWG   | 24 12 (converted acc. to IEC)                      |
| Conductor cross section flexible  | 0.2 mm² 4 mm²                                      |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.25 mm² 4 mm²                                     |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.25 mm² 4 mm²                                     |
| Cross-section with insertion bridge, rigid  | 4 mm²  |
| Cross-section with insertion bridge, flexible   | 4 mm²  |
| 2 conductors with same cross section, solid   | 0.2 mm² 1.5 mm²                                    |
| 2 conductors with same cross section, flexible  | 0.2 mm² 1.5 mm²                                    |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm² 1.5 mm²                                   |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm² 1.5 mm²                                    |
| Nominal current   | 6.3 A  |
| Maximum load current  | 6.3 A  |
| Nominal voltage   | 800 V (As a disconnect terminal block)             |

### **Dimensions**

| Width            | 8.2 mm  |
|------------------|---------|
| Height NS 35/15  | 64 mm   |
| Height NS 35/7,5 | 56.5 mm |
| Height           | 2.224 " |
| Height NS 32     | 61.5 mm |
| Length           | 72.5 mm |

### Material specifications

| Color                                  | black |
|--|-------|
| Flammability rating according to UL 94 | V0    |



3004126

https://www.phoenixcontact.com/in/products/3004126

| Insulating material group   | 1   |
|---|---|
| Insulating material   | PA  |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C  |
| Relative insulation material temperature index (Elec., UL 746 B)        | 125 °C  |
| hanical properties  |   |
| echanical data  |   |
| Open side panel   | No  |
| ronmental and real-life conditions                                      |   |
| scillation/broadband noise  |   |
| Specification   | DIN EN 50155 (VDE 0115-200):2008-03                                   |
| Spectrum  | Service life test category 1, class B, body mounted                   |
| Frequency   | f <sub>1</sub> = 5 Hz to f <sub>2</sub> = 150 Hz                      |
| ASD level   | 1.857 (m/s²)²/Hz  |
| Acceleration  | 0.8g  |
| Test duration per axis  | 5 h   |
| Test directions   | X-, Y- and Z-axis   |
| Result  | Test passed   |
| nocks   |   |
| Specification   | DIN EN 50155 (VDE 0115-200):2008-03                                   |
| Pulse shape   | Half-sine   |
| Acceleration  | 5g  |
| Shock duration  | 30 ms   |
| Number of shocks per direction  | 3   |
| Test directions   | X-, Y- and Z-axis (pos. and neg.)                                     |
| Result  | Test passed   |
| nbient conditions   |   |
| Ambient temperature (operation)   | -60 °C 105 °C (max. short-term operating temperature RTI Elec.)       |
| Ambient temperature (storage/transport)                                 | -25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)  | -5 °C 70 °C   |
| Ambient temperature (actuation)   | -5 °C 70 °C   |
| Permissible humidity (storage/transport)                                | 30 % 70 %   |
| ndards and regulations  |   |
| Connection in acc. with standard  | IEC 60947-7-3   |
|   | IEC 60947-7-3   |

NS 35/7,5



3004126

https://www.phoenixcontact.com/in/products/3004126


| Mounting type | NS 35/15 |
|---------------|----------|
|               | NS 32    |



3004126

https://www.phoenixcontact.com/in/products/3004126

## Drawings

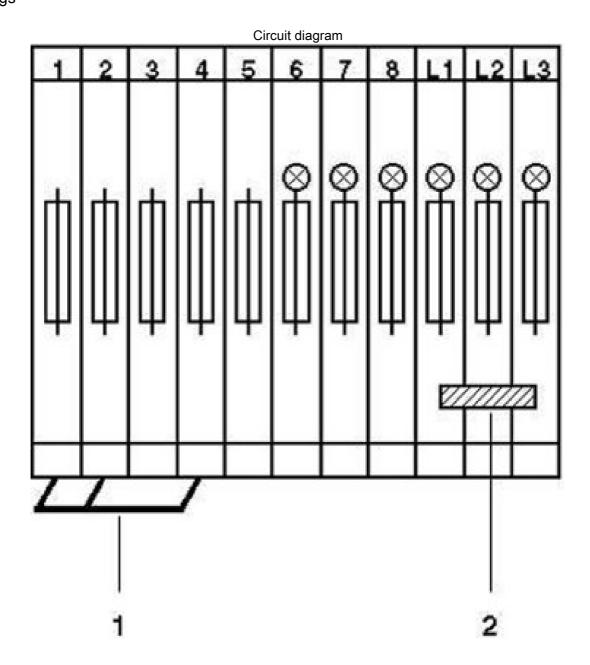




3004126

https://www.phoenixcontact.com/in/products/3004126

### Application drawing

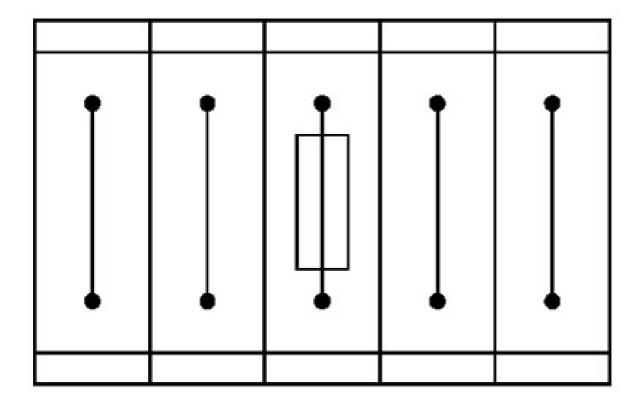


Fuse terminal block in single arrangement, block consisting of one fuse terminal block and 4 feed-through terminal blocks



3004126

https://www.phoenixcontact.com/in/products/3004126

### Application drawing

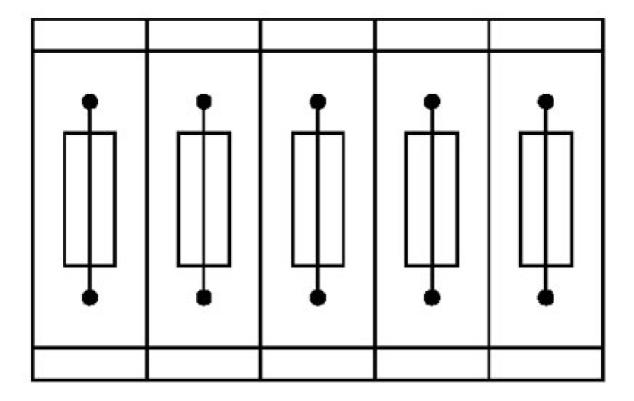

Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks



3004126

https://www.phoenixcontact.com/in/products/3004126

### Approvals

| • | CSA<br>Approval ID: 13631 |                                |                                |                   |                               |
|---|---------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
|   |                           | Nominal Voltage U <sub>N</sub> | Nominal Current I <sub>N</sub> | Cross Section AWG | Cross Section mm <sup>2</sup> |
|   |                           | 600 V                          | 6.3 A                          | 28 - 10           | -                             |
|   |                           | 600 V                          | 6.3 A                          | 28 - 10           | -                             |

| EAC  | EAC                               |
|------|-----------------------------------|
| LIIL | Approval ID: RU C-DE.Al30.B.01102 |

| e <b>911</b> us | cULus Recognized Approval ID: E60425 |                                |                                |                   |                               |
|-----------------|--------------------------------------|--------------------------------|--------------------------------|-------------------|-------------------------------|
|                 |                                      | Nominal Voltage U <sub>N</sub> | Nominal Current I <sub>N</sub> | Cross Section AWG | Cross Section mm <sup>2</sup> |
|                 |                                      | 600 V                          | 12 A                           | 26 - 10           | -                             |
|                 |                                      | 600 V                          | 12 A                           | 26 - 10           | -                             |
|                 |                                      | 600 V                          | 12 A                           | 26 - 10           | -                             |

| EHC | EAC                                      |
|-----|--|
| CUL | Approval ID: RU C-DE.BL08.B.00534        |
|     | Approvaria. No 6-be. be 60-be. be 60-be. |



3004126

https://www.phoenixcontact.com/in/products/3004126

### Classifications

UNSPSC 21.0

### **ECLASS**

| EC     | CLASS-11.0 | 27141116 |
|--------|------------|----------|
| EC     | CLASS-12.0 | 27141116 |
| EC     | CLASS-13.0 | 27250113 |
| ETIM   |            |          |
| ET     | TIM 8.0    | EC000899 |
| UNSPSC |            |          |

39121400



3004126

https://www.phoenixcontact.com/in/products/3004126

## **Environmental Product Compliance**

| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |  |
|------------|---|--|
|            | No hazardous substances above threshold values          |  |



3004126

https://www.phoenixcontact.com/in/products/3004126

### Accessories



Note: Applying some accessories below might limit this product.

### EBS 2-8 - Insertion bridge

3118151

https://www.phoenixcontact.com/in/products/3118151

Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray



1 Max. current carrying capacity: 32 A

### EBS 3-8 - Insertion bridge

3118148

https://www.phoenixcontact.com/in/products/3118148

Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray



1 Max. current carrying capacity: 32 A



3004126

https://www.phoenixcontact.com/in/products/3004126

### EBS 10-8 - Insertion bridge

3118135

https://www.phoenixcontact.com/in/products/3118135



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

1 Max. current carrying capacity: 32 A

### EB 1/3/5/7-8 - Insertion bridge

3072340

https://www.phoenixcontact.com/in/products/3072340



Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray

1 Max. current carrying capacity: 57 A



3004126

https://www.phoenixcontact.com/in/products/3004126

### EB 1/3/5-8 - Insertion bridge

3072341

https://www.phoenixcontact.com/in/products/3072341



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

Max. current carrying capacity: 57 A

#### SBS 8:UNBEDRUCKT - Marker card

1007235

https://www.phoenixcontact.com/in/products/1007235



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm



3004126

https://www.phoenixcontact.com/in/products/3004126

### SZS 0,6X3,5 - Screwdriver

1205053

https://www.phoenixcontact.com/in/products/1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size:  $0.6 \times 3.5 \times 100$  mm, 2-component grip, with non-slip grip

### NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

https://www.phoenixcontact.com/in/products/1201002



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

https://www.phoenixcontact.com/in/products/1201015



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

### NS 35/7,5 PERF 2000MM - DIN rail perforated

0801733

https://www.phoenixcontact.com/in/products/0801733



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

https://www.phoenixcontact.com/in/products/0801681



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

### NS 35/7,5 WH PERF 2000MM - DIN rail perforated

1204119

https://www.phoenixcontact.com/in/products/1204119



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

https://www.phoenixcontact.com/in/products/1204122



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

### NS 35/7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

https://www.phoenixcontact.com/in/products/0801704



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/7,5 ZN PERF 2000MM - DIN rail perforated

1206421

https://www.phoenixcontact.com/in/products/1206421



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

### NS 35/7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

https://www.phoenixcontact.com/in/products/1206434



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

https://www.phoenixcontact.com/in/products/0801762



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

### NS 35/7,5 CAP - End cap

1206560

https://www.phoenixcontact.com/in/products/1206560

DIN rail end piece, for DIN rail NS 35/7.5





3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/15 PERF 2000MM - DIN rail perforated

1201730

https://www.phoenixcontact.com/in/products/1201730




DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

### NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

https://www.phoenixcontact.com/in/products/1201714



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

https://www.phoenixcontact.com/in/products/0806602



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

### NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

https://www.phoenixcontact.com/in/products/1204135



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

https://www.phoenixcontact.com/in/products/1201756



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

### NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

https://www.phoenixcontact.com/in/products/1206599



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

https://www.phoenixcontact.com/in/products/1206586



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

### NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

https://www.phoenixcontact.com/in/products/1201895



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)



3004126

https://www.phoenixcontact.com/in/products/3004126

### NS 35/15 CAP - End cap

1206573

https://www.phoenixcontact.com/in/products/1206573

DIN rail end piece, for DIN rail NS 35/15



### NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

https://www.phoenixcontact.com/in/products/1201798



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)  $^{\circ}$ 



3004126

https://www.phoenixcontact.com/in/products/3004126

### ZB 8:UNBEDRUCKT - Zack marker strip

1052002

https://www.phoenixcontact.com/in/products/1052002



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

### ZB 8 CUS - Zack marker strip

0825011

https://www.phoenixcontact.com/in/products/0825011



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size:  $10.5 \times 8.15 \text{ mm}$ , Number of individual labels:  $10 \times 10^{-5} \text{ mm}$ 



3004126

https://www.phoenixcontact.com/in/products/3004126

#### UC-TM 8 - Marker for terminal blocks

0818072

https://www.phoenixcontact.com/in/products/0818072



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

#### UC-TM 8 CUS - Marker for terminal blocks

0824597

https://www.phoenixcontact.com/in/products/0824597



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56



3004126

https://www.phoenixcontact.com/in/products/3004126

#### UCT-TM 8 - Marker for terminal blocks

0828740

https://www.phoenixcontact.com/in/products/0828740



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

### UCT-TM 8 CUS - Marker for terminal blocks

0829616

https://www.phoenixcontact.com/in/products/0829616



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42



3004126

https://www.phoenixcontact.com/in/products/3004126

### ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

https://www.phoenixcontact.com/in/products/1052015



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.  $5 \times 8.15$  mm, Number of individual labels: 10

### ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

https://www.phoenixcontact.com/in/products/1052028



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.  $5 \times 8.15$  mm, Number of individual labels: 10



3004126

https://www.phoenixcontact.com/in/products/3004126

### ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

https://www.phoenixcontact.com/in/products/1052413



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

### CLIPFIX 35 - End clamp

3022218

https://www.phoenixcontact.com/in/products/3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



3004126

https://www.phoenixcontact.com/in/products/3004126

### CLIPFIX 35-5 - End clamp

3022276

https://www.phoenixcontact.com/in/products/3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5. 15 mm, color: gray

### E/NS 35 N - End clamp

0800886

https://www.phoenixcontact.com/in/products/0800886



End clamp, width: 9.5 mm, color: gray



3004126

https://www.phoenixcontact.com/in/products/3004126

### E/UK - End clamp

1201442

https://www.phoenixcontact.com/in/products/1201442



End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35

### E/UK 1 - End clamp

1201413

https://www.phoenixcontact.com/in/products/1201413



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

Phoenix Contact 2023 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in