
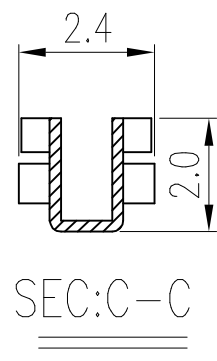


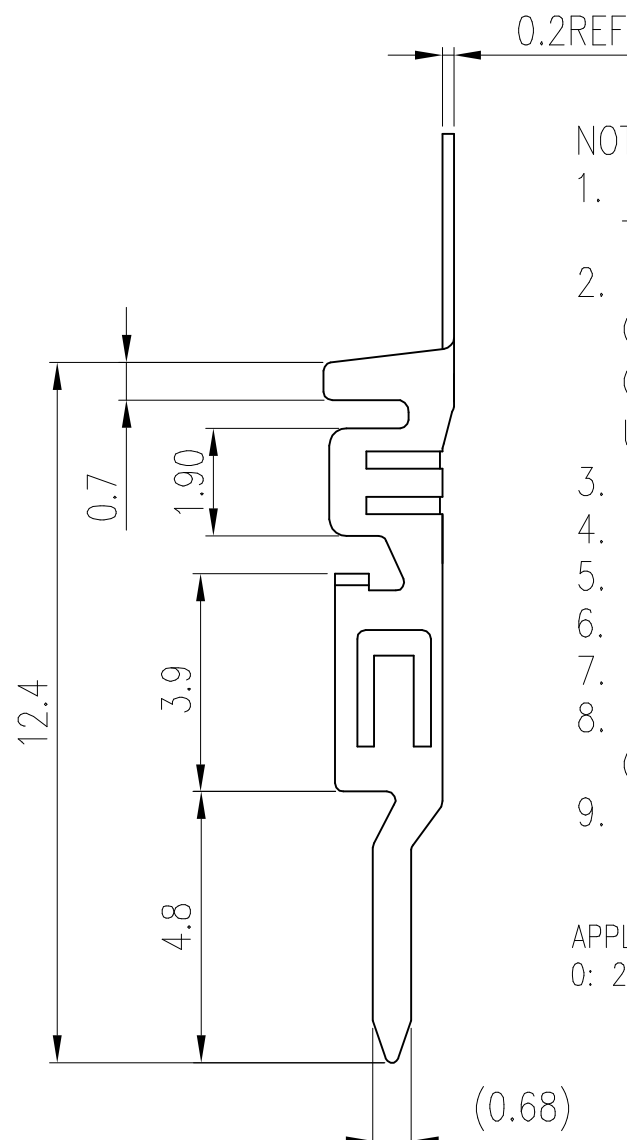


PRODUCT NUMBER
10127719-00XXLF

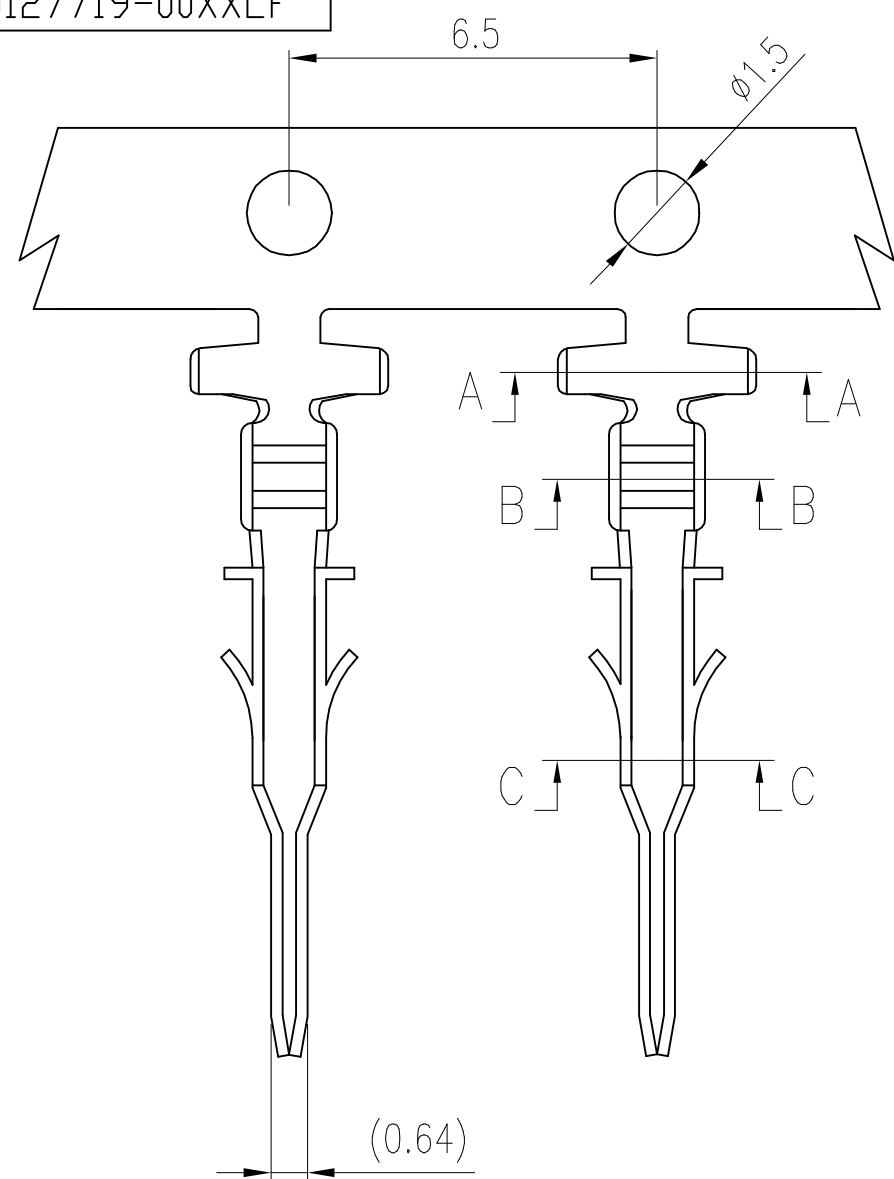

NOTES:

- MATERIAL:
TERMINAL: PHOSPHORUS BRONZE
- PLATING:
CONTACT AREA : OPTIONAL
CRIMP AREA : 80μ" MIN. BRIGHT TIN
UNDER PLATING : MIN. 30μ" NICKEL OVERALL
- REFER GS-20-0399 APPLICATION SPECIFICATION FOR MATING CONNECTOR
- PRODUCT SPECIFICATION: GS-12-1177.
- REEL PACKING SPECIFICATION: GS-14-2359.
- APPLICATION SPECIFICATION : GS-20-0399
- MAXIMUM INSULATION DIAMETER : 1.85mm
- LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
- PRODUCT NUMBER SCHEME:

10127719-X 0 X X LF

APPLICABLE WIRE
0: 20-24 AWG

PLATING TYPE
P: PRE-PLATED
BLANK: POST-PLATED

PLATING CODE
1: 80μ" BRIGHT TIN OVERALL
2: GOLD FLASH (POST-PLATED).
3: 15μ" Au (POST-PLATED)
4: 30μ" Au (POST-PLATED)

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302		ISO 406 ISO 1101		mm		MINITEK PWR 3.0	
ltr		ecn no		date		tolerances unless otherwise specified		title	
A		TAI		2013-10-21		angles linear		PLUG CRIMP TERMINAL FOR	
B		ELX-T-17032		TAI		.0±.30		MINITEK PWR3.0 WIRE CONNECTOR	
C		ELX-T-18006		TAI		.00±.20		sheet 1 of 1 size	
D		ELX-T-24280		TAI		0°±3'		10127719	
E		ELX-I-43461		AKHIL		2022-01-21		A3	
				dr		KENNY TAI		2013-10-21	
				engr		AKHIL RAJAN		2022-01-21	
				chr		MITHUN PAUL		2022-01-21	
				appd		SPK		2022-01-21	
sheet index		revision sheet		E 1				type Product Customer Drawing	

Amphenol FCI

© 2016 AFCl