

# BP 4-5CT - Short-circuit connector



3208733

<https://www.phoenixcontact.com/in/products/3208733>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Plug for five current transformers, each with leading transformer short circuit



## Commercial Data

Item number	3208733
Packing unit	10 pc
Minimum order quantity	10 pc
Sales Key	BE6
Product Key	BE643X
Catalog Page	Page 334 (C-1-2019)
GTIN	4055626013015
Weight per Piece (including packing)	132.22 g
Weight per Piece (excluding packing)	132.22 g
Customs tariff number	85366990
Country of origin	PL

# BP 4-5CT - Short-circuit connector



3208733

<https://www.phoenixcontact.com/in/products/3208733>

## Technical Data

### Product properties

Product type	Plug
Number of positions	10
Pitch	6.1 mm
Number of connections	10
Number of rows	1
Potentials	10

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	1.02 W

### Connection data

Nominal cross section	4 mm <sup>2</sup>
Rated cross section AWG	10
Screw thread	M4
Tightening torque	1.2 ... 1.5 Nm
Stripping length	8 mm ... 9 mm
Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross section AWG	20 ... 14 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	20 ... 14 (converted acc. to IEC)
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Nominal current	15 A
Maximum load current	30 A
Nominal voltage	320 V

### Dimensions

Width	86.7 mm
Height	56.3 mm
Length	40 mm
Pitch	6.1 mm

### Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I

# BP 4-5CT - Short-circuit connector



3208733

<https://www.phoenixcontact.com/in/products/3208733>

Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

## Mounting

Mounting type	Insertion in base strip
---------------	-------------------------

# BP 4-5CT - Short-circuit connector


3208733

<https://www.phoenixcontact.com/in/products/3208733>



## Drawings

Circuit diagram

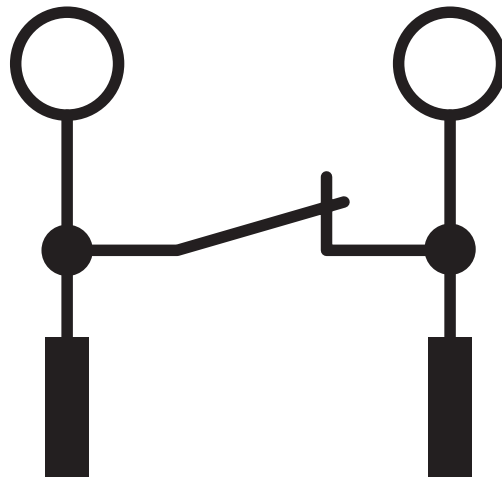

# BP 4-5CT - Short-circuit connector



3208733

<https://www.phoenixcontact.com/in/products/3208733>

## Classifications

### ECLASS

ECLASS-11.0

27141120

### ETIM

ETIM 8.0

EC000897

### UNSPSC

UNSPSC 21.0

39121400

# BP 4-5CT - Short-circuit connector



3208733

<https://www.phoenixcontact.com/in/products/3208733>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>



## Accessories

### PC - Coding star

3040588

<https://www.phoenixcontact.com/in/products/3040588>

Coding star, length: 3 mm, width: 3 mm, height: 6 mm, color: red



---

### C-RCI 1,5/M4 - Ring cable lug

3240018

<https://www.phoenixcontact.com/in/products/3240018>

Ring cable lug, red, 0.5 ... 1.5 mm<sup>2</sup>, M4



# BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>

## C-RCI 2,5/M4 - Ring cable lug

3240023

<https://www.phoenixcontact.com/in/products/3240023>



Ring cable lug, blue, 1.5 ... 2.5 mm<sup>2</sup>, M4

---

## C-RCI 6/M4 - Ring cable lug

3240027

<https://www.phoenixcontact.com/in/products/3240027>



Ring cable lug, yellow, 4 ... 6 mm<sup>2</sup>, M4



## BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>



### C-RCEI 1,5/M4 - Ring cable lug

3241203

<https://www.phoenixcontact.com/in/products/3241203>



Ring cable lug, red, 0.5 ... 1.5 mm<sup>2</sup>, M4, with copper sleeve incorporated, for insulation crimp

---

### C-RCEI 2,5/M4 - Ring cable lug

3241207

<https://www.phoenixcontact.com/in/products/3241207>



Ring cable lug, blue, 1.5 ... 2.5 mm<sup>2</sup>, M4, with copper sleeve incorporated, for insulation crimp

## BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>



## SZS 0,8X4,0 VDE - Screwdriver

1212508

<https://www.phoenixcontact.com/in/products/1212508>



Screwdriver, slot-headed, VDE insulated, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

---

## ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/in/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

## BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>



## ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/in/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## UC-TMF 6 - Marker for terminal blocks

0818140

<https://www.phoenixcontact.com/in/products/0818140>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

# BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>



## UC-TMF 6 CUS - Marker for terminal blocks

0824646

<https://www.phoenixcontact.com/in/products/0824646>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

---

## UCT-TMF 6 - Marker for terminal blocks

0828746

<https://www.phoenixcontact.com/in/products/0828746>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

# BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>



## UCT-TMF 6 CUS - Marker for terminal blocks

0829665

<https://www.phoenixcontact.com/in/products/0829665>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

---

## ZBF 6,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808749

<https://www.phoenixcontact.com/in/products/0808749>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

# BP 4-5CT - Short-circuit connector

3208733

<https://www.phoenixcontact.com/in/products/3208733>



## ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/in/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## ZBF 6,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810834

<https://www.phoenixcontact.com/in/products/0810834>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

## BP 4-5CT - Short-circuit connector

3208733


<https://www.phoenixcontact.com/in/products/3208733>



## ZBF 6,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810876

<https://www.phoenixcontact.com/in/products/0810876>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## FC 4-PCB/10 - Connector

3208736

<https://www.phoenixcontact.com/in/products/3208736>

PCB header, 10-pos.



---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)