

SAC-4P-M12MSS/ 2,0-PUR PE - Power cable



1408836

<https://www.phoenixcontact.com/in/products/1408836>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Power cable, 4-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12, coding: S, on free cable end, cable length: 2 m, for AC current up to 12 A/690 V

Your advantages

- Easy and safe: 100% electrically tested plug-in components
- Protection against incorrect connection using special S-coding
- Our standard: robust halogen-free PUR cable

Commercial Data

Item number	1408836
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BF1
Product Key	BF1CCP
Catalog Page	Page 289 (C-2-2019)
GTIN	4046356843782
Weight per Piece (including packing)	244 g
Weight per Piece (excluding packing)	240.9 g
Customs tariff number	85444290
Country of origin	PL

Technical Data

Product properties

Product type	Power cable
Number of positions	4
Application	Power supply
No. of cable outlets	1
Shielded	no
Coding	S

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Color Handle area	black
Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	690 V AC
Nominal current I_N	12 A
Protective circuit	unwired

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Coding type	S (Power)
-------------	-----------

Cable/line

Cable length	2 m
--------------	-----


PUR halogen-free black [PUR]

SAC-4P-M12MSS/ 2,0-PUR PE - Power cable



1408836

<https://www.phoenixcontact.com/in/products/1408836>

Dimensional drawing	
Cable weight	114 kg/km
UL AWM Style	20234 / 10492 (80°C/1000 V)
Number of positions	4
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor cross section	4x 1.5 mm ²
Wire diameter incl. insulation	2.45 mm ±0.05 mm
External cable diameter	8.8 mm ±0.25 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, black 3, green/yellow
Thickness, insulation	≥ 0.36 mm
Thickness, outer sheath	approx. 1.3 mm
Overall twist	4 wires, twisted
Length of twist, overall twist	93 mm
Max. conductor resistance	≤ 13 Ω/km (at 20 °C)
Insulation resistance	≥ 1 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 1000 V AC
Test voltage	≥ 10000 V AC (Spark test)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Max. bending cycles	2000000
Halogen-free	in accordance with DIN VDE 0472 part 815 in accordance with DIN EN 50267-2-1
Flame resistance	According to UL 758/1581 (Cable Flame) according to UL 758/1581 FT1 According to DIN EN 60332-1-2
Resistance to oil	According to DIN EN 60811-2-1, 168 h at 100°C According to UL 758, 168 h at 60°C
Other resistance	Hydrolysis and microbe resistant as per VDE 0282 section 10 Low adhesion abrasion-resistant Resistant to salt water
Ambient temperature (operation)	-50 °C ... 80 °C (cable, fixed installation)

SAC-4P-M12MSS/ 2,0-PUR PE - Power cable



1408836

<https://www.phoenixcontact.com/in/products/1408836>

	-30 °C ... 80 °C (Cable, flexible installation)
--	-------------------------------------------------

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP65 IP67 (without preloading, as additional test in accordance with IEC 60529)
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations

Standards/specifications	IEC 61076-2-111
--------------------------	-----------------


Drawings

Diagram

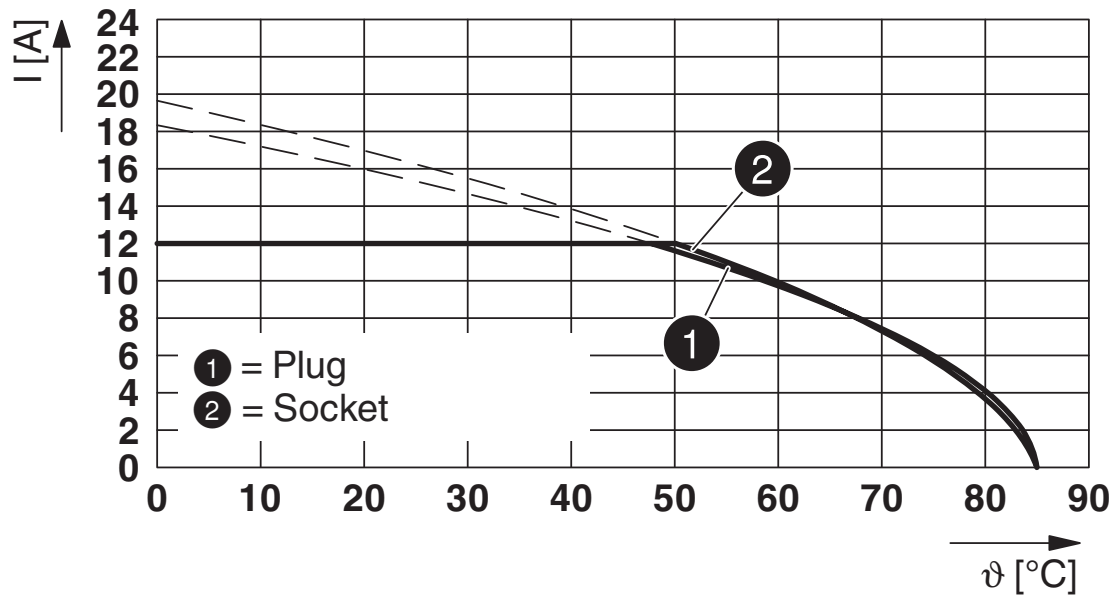

Base curve

Schematic diagram

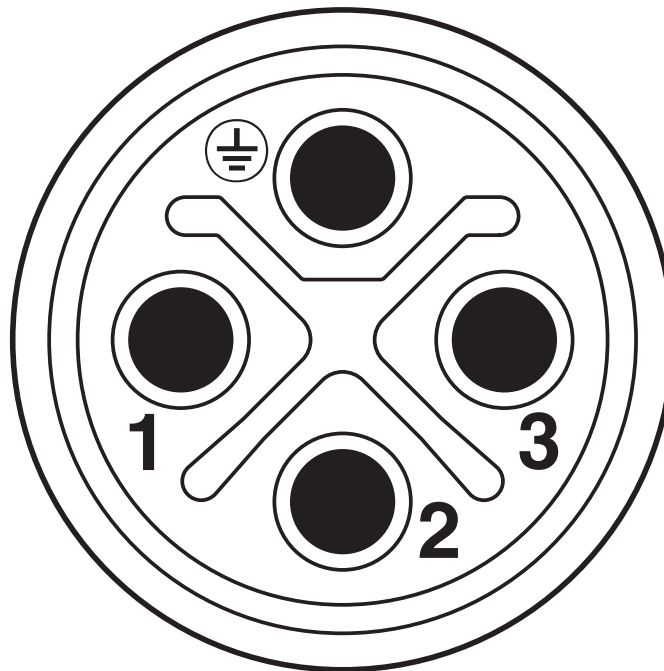

M12 plug pin assignment, 4-pos., S-coded, plug side view


SAC-4P-M12MSS/ 2,0-PUR PE - Power cable




1408836

<https://www.phoenixcontact.com/in/products/1408836>

Circuit diagram

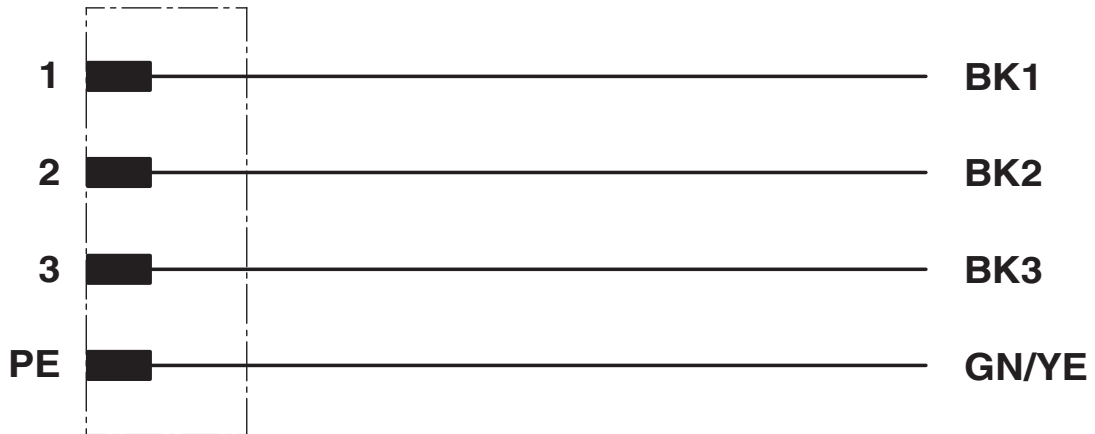

Dimensional drawing

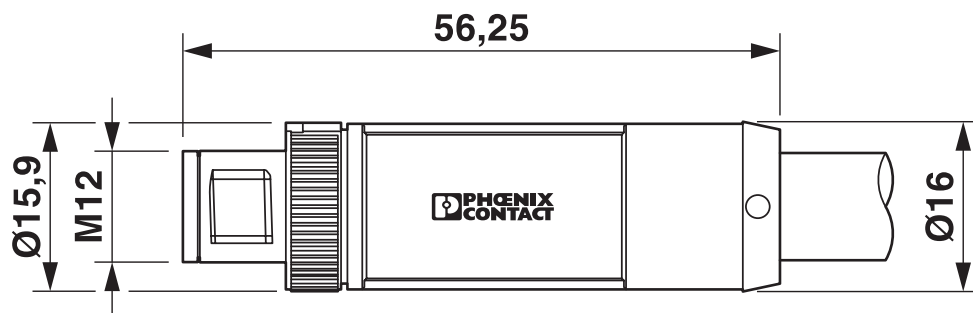

Plug, M12 x 1, straight

SAC-4P-M12MSS/ 2,0-PUR PE - Power cable



1408836

<https://www.phoenixcontact.com/in/products/1408836>

Approvals



EAC

Approval ID: RU C-DE.BL08.B.00286



UL Listed

Approval ID: FILE E 468743

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	12 A	-	- 16



cUL Listed

Approval ID: FILE E 468743

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	600 V	12 A	- 16	-



EAC

Approval ID: RU D-DE.HB35.B.00387

SAC-4P-M12MSS/ 2,0-PUR PE - Power cable



1408836

<https://www.phoenixcontact.com/in/products/1408836>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-4P-M12MSS/ 2,0-PUR PE - Power cable



1408836

<https://www.phoenixcontact.com/in/products/1408836>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

SAC-4P-M12MSS/ 2,0-PUR PE - Power cable



1408836

<https://www.phoenixcontact.com/in/products/1408836>

Accessories

SAC BIT M12-D16 - Tool

1200305

<https://www.phoenixcontact.com/in/products/1200305>

Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, knurl diameter: 16 mm, for 4 mm hexagonal drive



PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/in/products/1560251>

M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field



Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in