Product data sheet

Specifications





Empty pendant control station, Harmony XAC, plastic, yellow, 5 cut outs

XACA05

Main

Range of product	Harmony XAC
Product or component type	Pendant control station
Device short name	XACA

Complementary				
Control station type	Double insulated			
Enclosure material	Polypropylene			
Electrical circuit type	Control circuit			
Enclosure type	Empty enclosure			
Number of cut-out	5 cut-outs			
Control station colour	Yellow			
Cable entry	Rubber sleeve with stepped entry 826 mm			
Guard rail	Without			
Vertical operator cut-out centre	30 mm			
Standards	UL 508 EN/IEC 60204-32 CSA C22.2 No 14 EN/IEC 60947-5-1			
Product certifications	CCC GOST			
Protective treatment	ТН			
Ambient air temperature for operation	-2570 °C			
Ambient air temperature for storage	-4070 °C			
Vibration resistance	15 gn (f= 10500 Hz) conforming to IEC 60068-2-6			
Shock resistance	100 gn conforming to IEC 60068-2-27			
Overvoltage category	Class II conforming to IEC 61140			
IP degree of protection	IP65 conforming to IEC 60529			
IK degree of protection	IK08 conforming to EN 50102			
Mechanical durability	1000000 cycles			
Net weight	0.625 kg			

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.000 cm
Package 1 Width	9.000 cm
Package 1 Length	44.500 cm
Package 1 Weight	584.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	12
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	7.657 kg

Offer Sustainability

Sustainable offer status	Green Premium product					
REACh Regulation	REACh Declaration					
REACh free of SVHC	Yes					
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration					
Toxic heavy metal free	Yes					
Mercury free	Yes					
China RoHS Regulation	China RoHS declaration					
RoHS exemption information	Yes					
Environmental Disclosure	Product Environmental Profile					
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov					

Contractual warranty

Warranty 18 months


Product data sheet

Dimensions Drawings

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.



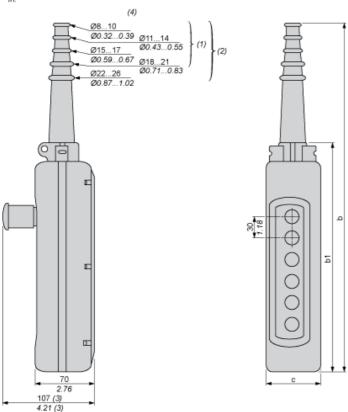

- (1) (2) (3) (4)
- For 2 and 3-way XAC A stations. For 4 to 8-way XAC A stations. With trigger action Emergency stop head operator Internal ø

Dimensions in mm

Number of cut-outs	2	3	4	5	6	8	12
b	314	314	440	440	500	560	680
b1	190	190	250	250	310	370	490
С	80	80	80	80	80	80	92

Dimensions in in.

Number of cut-outs	2	3	4	5	6	8	12
b	12.36	12.36	17.32	17.32	19.68	22.05	26.77
b1	7.48	7.48	9.84	9.84	12.20	14.57	19.29
С	3.15	3.15	3.15	3.15	3.15	3.15	3.62

Recommended replacement(s)