

# Product data sheet

Specifications



## Harmony XAC, Pendant control station, plastic, yellow, 4 push buttons, 1 emergency stop

XACA4914

! Discontinued on: 30 June 2022

! End-of-service on: 28 July 2022

! Discontinued

### Main

Range of product Harmony XAC

Product or component type Pendant control station

Device short name XACA

### Complementary

Control station type Double insulated

Enclosure material Polypropylene

Electrical circuit type Control circuit

Enclosure type Complete ready for use

Control station application Control of 2-speed hoist motor

Control station composition 4 push-buttons + 1 emergency stop

Control button type  
First push-button 1 NC + 2 NO raise, slow-fast  
Second push-button 1 NC + 2 NO lower, slow-fast  
Emergency stop push-button Ø 40 mm 1 NC trigger action  
Fourth push-button 1 NC + 2 NO left, slow-fast  
Third push-button 1 NC + 2 NO right, slow-fast

Product compatibility  
ZB2BE102 for emergency stop  
XENG1191 for each direction

Mechanical interlocking With mechanical interlocking between pairs

Control station colour Yellow

Connections - terminals  
Screw clamp terminals, 1 x 0.5...1 x 2.5 mm<sup>2</sup> without cable end  
Screw clamp terminals, 1 x 0.5...2 x 1.5 mm<sup>2</sup> with cable end

Standards  
EN/IEC 60204-32  
EN/ISO 13850: 2006  
CSA C22.2 No 14  
EN/IEC 60947-5-1  
UL 508  
EN/IEC 60947-5-5

Product certifications  
GOST  
CCC

Protective treatment TH

Ambient air temperature for operation -25...70 °C

Ambient air temperature for storage -40...70 °C

Vibration resistance 15 gn (f= 10...500 Hz) conforming to IEC 60068-2-6

<b>Shock resistance</b>	100 gn conforming to IEC 60068-2-27
<b>Overtoltage category</b>	Class II conforming to IEC 61140
<b>IP degree of protection</b>	IP65 conforming to IEC 60529
<b>IK degree of protection</b>	IK08 conforming to EN 50102
<b>Mechanical durability</b>	1000000 cycles
<b>Cable entry</b>	Rubber sleeve with stepped entry 8...26 mm
<b>Contact code designation</b>	A600 AC-15, Ue = 240 V, Ie = 3 A conforming to IEC 60947-5-1 appendix A A600 AC-15, Ue = 600 V, Ie = 1.2 A conforming to IEC 60947-5-1 appendix A Q600 DC-13, Ue = 250 V, Ie = 0.27 A conforming to IEC 60947-5-1 appendix A Q600 DC-13, Ue = 600 V, Ie = 0.1 A conforming to IEC 60947-5-1 appendix A
<b>[Ithe] conventional enclosed thermal current</b>	10 A
<b>[Ui] rated insulation voltage</b>	600 V (pollution degree 3)
<b>[Uimp] rated impulse withstand voltage</b>	6 kV conforming to IEC 60947-1
<b>Contact operation</b>	Staggered Slow-break
<b>Maximum resistance across terminals</b>	25 MOhm
<b>Operating force</b>	18 N push-button 8 N emergency stop
<b>Short-circuit protection</b>	10 A fuse protection by cartridge fuse type gG
<b>Rated operational power in W</b>	40 W DC-13 for 1000000 cycles, operating rate <60 cyc/mn at 120 V, load factor = 0.5 (inductive load) conforming to IEC 60947-5-1 appendix C 48 W DC-13 for 1000000 cycles, operating rate <60 cyc/mn at 48 V, load factor = 0.5 (inductive load) conforming to IEC 60947-5-1 appendix C 65 W DC-13 for 1000000 cycles, operating rate <60 cyc/mn at 24 V, load factor = 0.5 (inductive load) conforming to IEC 60947-5-1 appendix C
<b>Terminals description ISO n°1</b>	(13-14)NO (21-22)NC (33-34)NO_CL
<b>Terminals description ISO n°2</b>	(11-12)NC
<b>Terminal identifier</b>	(13-14)NO (11-12)NC
<b>Net weight</b>	0.675 kg

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	8.5 cm
<b>Package 1 Width</b>	9 cm
<b>Package 1 Length</b>	35 cm
<b>Package 1 Weight</b>	600 g

## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes


<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a>
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
<b>California proposition 65</b>	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

**Dimensions**

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

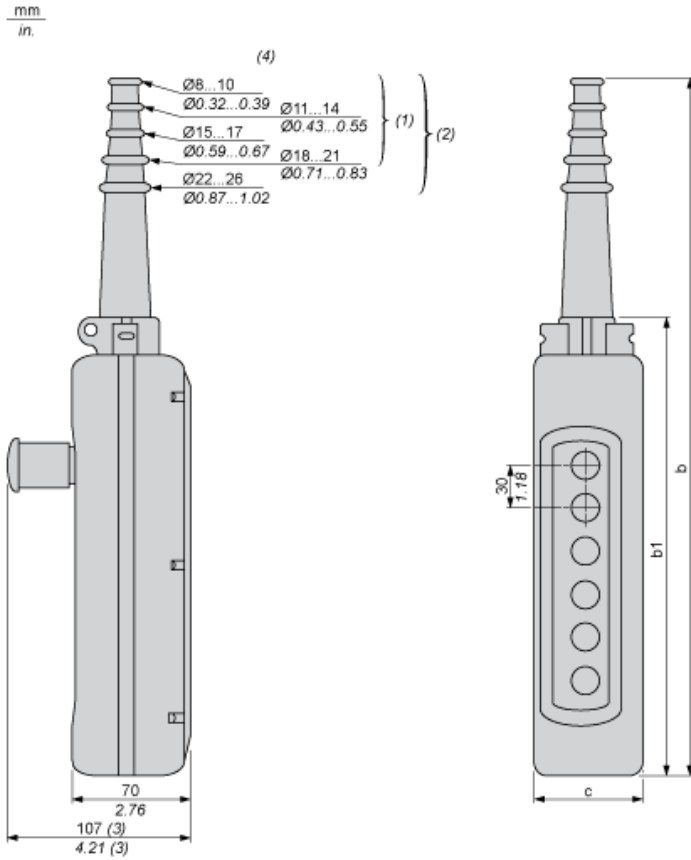

- (1) For 2 and 3-way XAC A stations.
- (2) For 4 to 8-way XAC A stations.
- (3) With trigger action Emergency stop head operator
- (4) Internal ø

**Dimensions in mm**

Number of cut-outs	2	3	4	5	6	8	12
b	314	314	440	440	500	560	680
b1	190	190	250	250	310	370	490
c	80	80	80	80	80	80	92


**Dimensions in in.**

Number of cut-outs	2	3	4	5	6	8	12
b	12.36	12.36	17.32	17.32	19.68	22.05	26.77
b1	7.48	7.48	9.84	9.84	12.20	14.57	19.29
c	3.15	3.15	3.15	3.15	3.15	3.15	3.62

Control of 2-Speed Reversing Motor

---

With two XENG1191 contact blocks, to be ordered separately

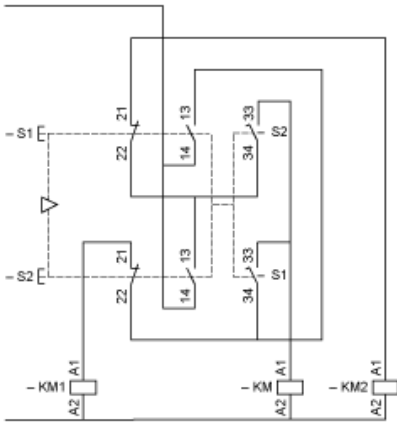


**KM** High speed contactor

**Rated Operational Power**

**AC Supply 50/60 Hz Inductive Circuit**

Operating rate: 3600 operating cycles/hour. Load factor: 0.5.

Millions of operating cycles, AC-15 utilization category



**I<sub>the</sub>** Thermal current  
**(A)** Current

**DC Supply**

Operating rate: 3600 operating cycles/hour. Load factor: 0.5.

Power broken in W for 1 million operating cycles, DC-13 utilization category

Voltage	V	24	48	120
Inductive circuit	W	65	48	40

**Recommended replacement(s)**

XACA4914 is replaced by:

1x



Pendant control station, Harmony XAC, plastic, yellow, 4 push buttons with 2NO +1NC, 1 emergency stop NC

XACA4913