


Product datasheet

Specifications

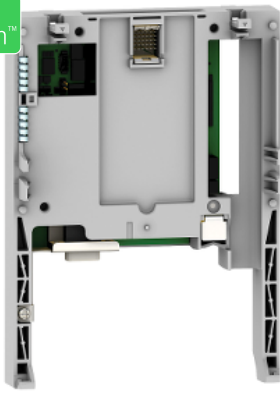

Profibus DP communication card, Altivar, 9 way female SUB D connector

VW3A3307

Main

Product or component type	Communication card
Range compatibility	Altivar 71 Altivar 61Q Altivar 61 Altivar 71Q
Communication port protocol	Profibus DP
Connector type	9-way female SUB-D connector
Transmission rate	1.5 Mbps 12 Mbps 9600 bps 3 Mbps 500 kbps 19.2 kbps 187.5 kbps 6 Mbps 93.75 kbps

Complementary

Number of addresses	1...126
Communication service	CiA 402 profile I/O profile I/O data Communication monitoring can be inhibited, adjustable PPO type 5
Display type	1 LED for DX (data exchange) 1 LED for ST (status) Graphic display terminal for control word received Graphic display terminal for I/O data Graphic display terminal for reference received
Net weight	0.3 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.200 cm
Package 1 Width	17.000 cm
Package 1 Length	23.000 cm
Package 1 Weight	288.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	7

Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.512 kg
Unit Type of Package 3	P06
Number of Units in Package 3	56
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	30.388 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)