


ZB 8:UNBEDRUCKT - Zack marker strip



1052002

<https://www.phoenixcontact.com/in/products/1052002>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

Your advantages

- Labeling service: Phoenix Contact can custom-label all zack marker strip markers according to your requirements
- The ZB zack marker strip system is a marking solution for modular terminal blocks and electronics modules with tall marker grooves

Commercial Data

| | |
|--------------------------------------|---------------------|
| Item number | 1052002 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales Key | BG2 |
| Product Key | BG2112 |
| Catalog Page | Page 120 (C-3-2019) |
| GTIN | 4017918016302 |
| Weight per Piece (including packing) | 2.04 g |
| Weight per Piece (excluding packing) | 1.94 g |
| Customs tariff number | 39269097 |
| Country of origin | IN |

ZB 8:UNBEDRUCKT - Zack marker strip



1052002

<https://www.phoenixcontact.com/in/products/1052002>

Technical Data

Notes

| | |
|---------|-------------------------|
| General | Can be labeled with CMS |
|---------|-------------------------|

Product properties

| | |
|--------------|------------------|
| Product type | Terminal marking |
| Pitch | 8.2 mm |
| Type | high |

Marking

| | |
|-------------------------------------|----|
| Number of individual labels | 10 |
| Number of individual labels per row | 10 |
| Number of marker strips | 10 |

Dimensions

| | |
|-------|--------|
| Width | 8 mm |
| Pitch | 8.2 mm |

Material specifications

| | |
|--|--------------------------------|
| Color | white |
| Material | PA |
| Flammability rating according to UL 94 | V2 |
| Components | free from silicone and halogen |

Environmental and real-life conditions

UV resistance

| | |
|---------------|--------------------------------|
| Specification | ISO 4892-2:2013-03 (following) |
|---------------|--------------------------------|

Ambient conditions

| | |
|---|-------------------|
| Ambient temperature (operation) | -40 °C ... 100 °C |
| Recommended ambient temperature (storage/transport) | 23 °C |
| Recommended humidity (storage/transport) | 50 % |

Standards and regulations


| | |
|-----------------|-----------------------------|
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
|-----------------|-----------------------------|

Mounting

| | |
|---------------|---------|
| Mounting type | snapped |
|---------------|---------|

Drawings

Schematic diagram

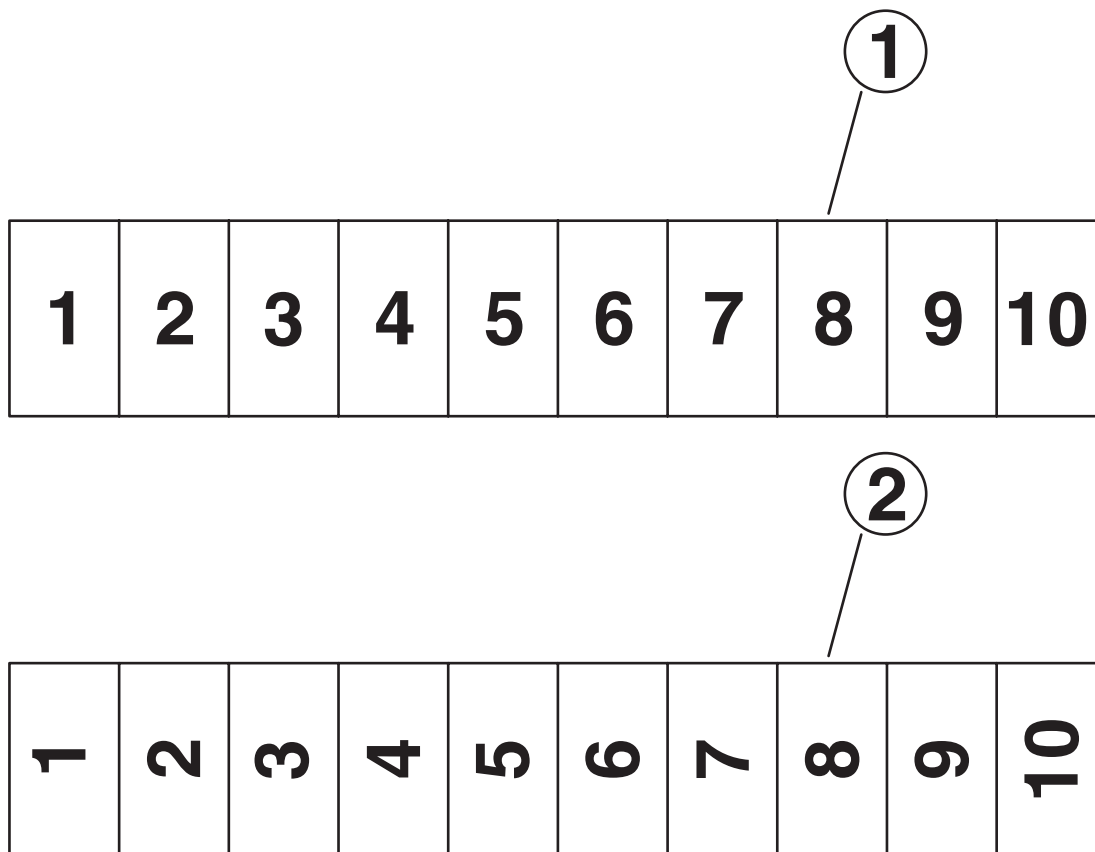

ZB 8:UNBEDRUCKT - Zack marker strip



1052002

<https://www.phoenixcontact.com/in/products/1052002>

Classifications

ECLASS

| | |
|---------------|----------|
| ECLASS-10.0.1 | 27141137 |
| ECLASS-11.0 | 27281101 |
| ECLASS-12.0 | 27281101 |
| ECLASS-13.0 | 27281101 |

ETIM

| | |
|----------|----------|
| ETIM 8.0 | EC000761 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39131500 |
|-------------|----------|

ZB 8:UNBEDRUCKT - Zack marker strip



1052002

<https://www.phoenixcontact.com/in/products/1052002>

Accessories

CMS-P1-M/ZB - Magazine insert

5144699

<https://www.phoenixcontact.com/in/products/5144699>

Plastic magazines for CMS-P1-PLOTTER and PLOTMARK. For accommodating 22 zack marker strips



Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in