

# PC 4/ 2-G-7,62 - PCB header



1804797

<https://www.phoenixcontact.com/in/products/1804797>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



PCB headers, nominal cross section: 4 mm<sup>2</sup>, color: green, nominal current: 20 A, rated voltage (III/2): 630 V, contact surface: Tin, type of contact: Pin, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: PC 4/..-G, pitch: 7.62 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 5 mm, number of solder pins per potential: 2, plug-in system: COMBICON PC 4, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Mounting flange: Accessory Item No. 1827570

## Your advantages

- Well-known mounting principle allows worldwide use

## Commercial Data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1804797             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales Key                            | AAD                 |
| Product Key                          | AADSAA              |
| Catalog Page                         | Page 516 (C-1-2013) |
| GTIN                                 | 4017918046231       |
| Weight per Piece (including packing) | 4.311 g             |
| Weight per Piece (excluding packing) | 3.5 g               |
| Customs tariff number                | 85366930            |
| Country of origin                    | BG                  |

# PC 4/ 2-G-7,62 - PCB header



1804797

<https://www.phoenixcontact.com/in/products/1804797>

## Technical Data

### Product properties

|                           |                       |
|---------------------------|-----------------------|
| Type                      | Standard              |
| Product line              | COMBICON Connectors L |
| Product type              | PCB headers           |
| Product family            | PC 4/..-G             |
| Number of positions       | 2                     |
| Pitch                     | 7.62 mm               |
| Number of connections     | 2                     |
| Number of rows            | 1                     |
| Mounting flange           | without               |
| Number of potentials      | 2                     |
| Pin layout                | Linear pinning        |
| Solder pins per potential | 2                     |

### Electrical properties

|                             |                |
|-----------------------------|----------------|
| Nominal current $I_N$       | 20 A           |
| Nominal voltage $U_N$       | 630 V          |
| Degree of pollution         | 3              |
| Contact resistance          | 0.5 m $\Omega$ |
| Rated voltage (III/3)       | 400 V          |
| Rated surge voltage (III/3) | 6 kV           |
| Rated voltage (III/2)       | 630 V          |
| Rated surge voltage (III/2) | 6 kV           |
| Rated voltage (II/2)        | 630 V          |
| Rated surge voltage (II/2)  | 6 kV           |

### Mounting

|               |                |
|---------------|----------------|
| Mounting type | Wave soldering |
| Pin layout    | Linear pinning |

### Material specifications

#### Material data - contact

|   |  |
|---|--|
| Note  | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                            | Cu alloy   |
| Surface characteristics                     | Tin-plated   |
| Metal surface contact area (top layer)      | Tin (5 - 7 $\mu\text{m}$ Sn)   |
| Metal surface contact area (middle layer)   | Nickel (2 - 5 $\mu\text{m}$ Ni)  |
| Metal surface soldering area (top layer)    | Tin (5 - 7 $\mu\text{m}$ Sn)   |
| Metal surface soldering area (middle layer) | Nickel (2 - 5 $\mu\text{m}$ Ni)  |

#### Material data - housing

# PC 4/ 2-G-7,62 - PCB header

1804797

<https://www.phoenixcontact.com/in/products/1804797>

|   |              |
|---|--------------|
| Color (Housing)   | green (6021) |
| Insulating material   | PA           |
| Insulating material group   | I            |
| CTI according to IEC 60112  | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |


## Material data – actuating element

|          |    |
|----------|----|
| Color () | () |
|----------|----|

## Notes

|                    |  |
|--------------------|--|
| Notes on operation | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|--------------------|--|

## Dimensions

|                       |  |
|-----------------------|--|
| Dimensional drawing   |  |
| Pitch                 | 7.62 mm  |
| Width [w]             | 15.22 mm   |
| Height [h]            | 19.25 mm   |
| Length [l]            | 29 mm  |
| Installed height      | 14.25 mm   |
| Solder pin length [P] | 5 mm   |

## Mechanical tests

### Test for conductor damage and slackening

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

### Pull-out test

|   |   |
|---|---|
| Specification   | IEC 60999-1:1999-11                     |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.2 mm <sup>2</sup> / solid / > 10 N    |
|   | 0.2 mm <sup>2</sup> / flexible / > 10 N |
|   | 4 mm <sup>2</sup> / solid / > 60 N      |
|   | 4 mm <sup>2</sup> / flexible / > 60 N   |

### Insertion and withdrawal forces

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

# PC 4/ 2-G-7,62 - PCB header



1804797

<https://www.phoenixcontact.com/in/products/1804797>

|                                     |     |
|-------------------------------------|-----|
| No. of cycles                       | 50  |
| Insertion strength per pos. approx. | 8 N |
| Withdraw strength per pos. approx.  | 5 N |

## Torque test

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
|---------------|---------------------|

## Contact holder in insert

|  |                        |
|--|------------------------|
| Specification                                  | IEC 60512-15-1:2008-05 |
| Contact holder in insert<br>Requirements >20 N | Test passed            |

## Resistance of inscriptions

|               |                        |
|---------------|------------------------|
| Specification | IEC 60068-2-70:1995-12 |
| Result        | Test passed            |

## Polarization and coding

|               |                        |
|---------------|------------------------|
| Specification | IEC 60512-13-5:2006-02 |
| Result        | Test passed            |

## Visual inspection

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-1:2002-02 |
| Result        | Test passed           |

## Dimension check

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-2:2002-02 |
| Result        | Test passed           |

## Electrical tests

### Thermal test | Test group C

|                            |                       |
|----------------------------|-----------------------|
| Specification              | IEC 60512-5-1:2002-02 |
| Tested number of positions | 12                    |

### Insulation resistance

|  |                       |
|--|-----------------------|
| Specification                                | IEC 60512-3-1:2002-02 |
| Insulation resistance, neighboring positions | > 5 MΩ                |

### Air clearances and creepage distances |

|  |                     |
|--|---------------------|
| Specification  | IEC 60664-1:2007-04 |
| Insulating material group                              | I                   |
| Comparative tracking index (IEC 60112)                 | CTI 600             |
| Rated insulation voltage (III/3)                       | 400 V               |
| Rated surge voltage (III/3)                            | 6 kV                |
| minimum clearance value - non-homogenous field (III/3) | 5.5 mm              |
| minimum creepage distance (III/3)                      | 5.5 mm              |
| Rated insulation voltage (III/2)                       | 630 V               |
| Rated surge voltage (III/2)                            | 6 kV                |

1804797

<https://www.phoenixcontact.com/in/products/1804797>

|  |        |
|--|--------|
| minimum clearance value - non-homogenous field (III/2) | 5.5 mm |
| minimum creepage distance (III/2)                      | 5.5 mm |
| Rated insulation voltage (II/2)                        | 630 V  |
| Rated surge voltage (II/2)                             | 6 kV   |
| minimum clearance value - non-homogenous field (II/2)  | 5.5 mm |
| minimum creepage distance (II/2)                       | 5.5 mm |

## Environmental and real-life conditions

### Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.35 mm (10 Hz ... 60.1 Hz) |
| Sweep speed            | 5g (60.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |

### Durability test

|  |                       |
|--|-----------------------|
| Specification                          | IEC 60512-9-1:2010-03 |
| Impulse withstand voltage at sea level | 7.3 kV                |
| Contact resistance $R_1$               | 0.5 m $\Omega$        |
| Contact resistance $R_2$               | 0.6 m $\Omega$        |
| Insertion/withdrawal cycles            | 50                    |

### Climatic test

|                                   |   |
|-----------------------------------|---|
| Specification                     | ISO 6988:1985-02  |
| Corrosive stress                  | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Thermal stress                    | 100 °C/168 h  |
| Power-frequency withstand voltage | 3.31 kV   |

### Ambient conditions


|   |   |
|---|---|
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                       |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|


Drawings

Diagram

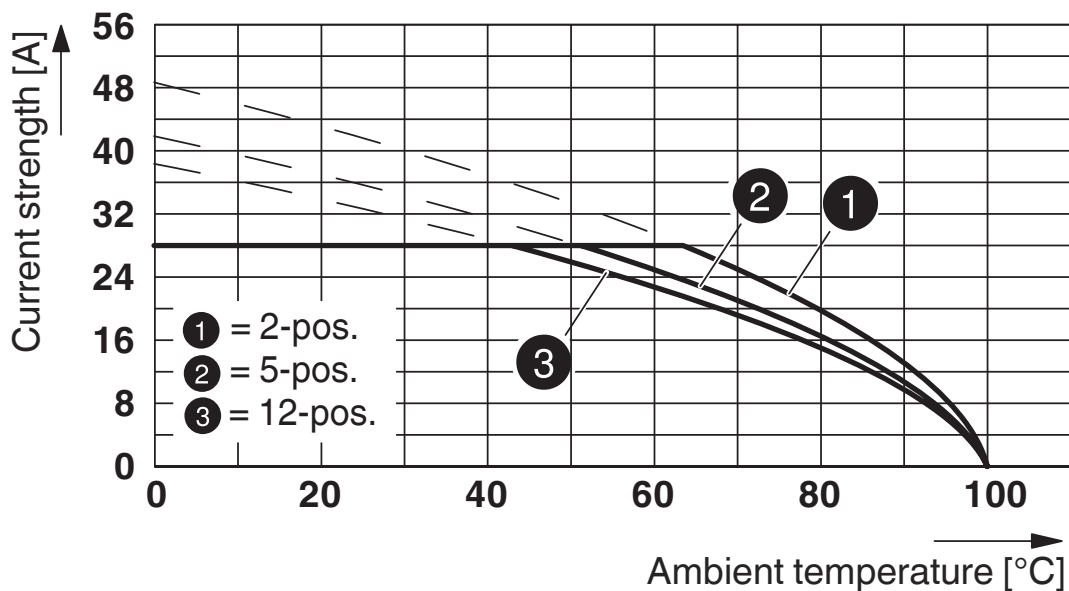


Derating curve for: PC 5/...-ST1-7,62 with PC 4/...-G-7,62  
 Conductor cross section: 4 mm<sup>2</sup>


Diagram

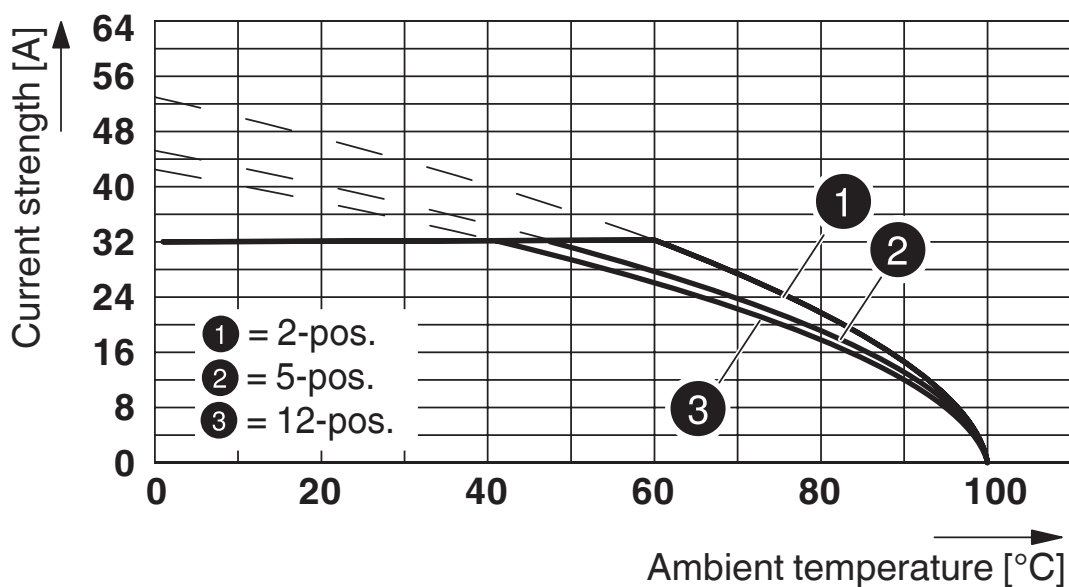

Type: PC 5/...-ST2-7,62 with PC 4/...-G-7,62  
 Conductor cross section: 6 mm<sup>2</sup>

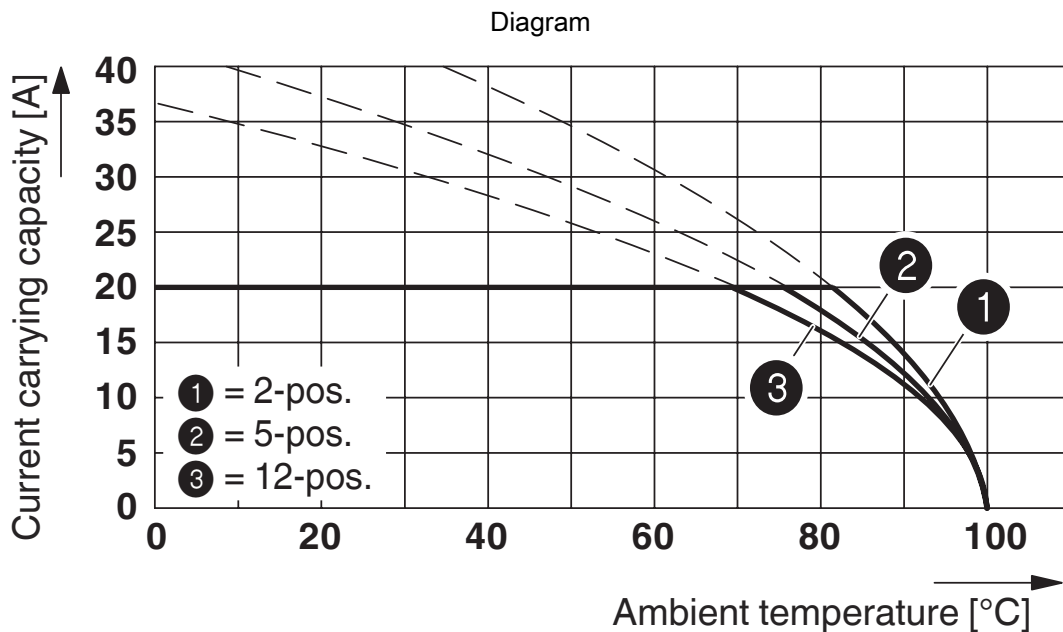


Type: PC 4/...-ST-7,62 with PC 4/...-G-7,62

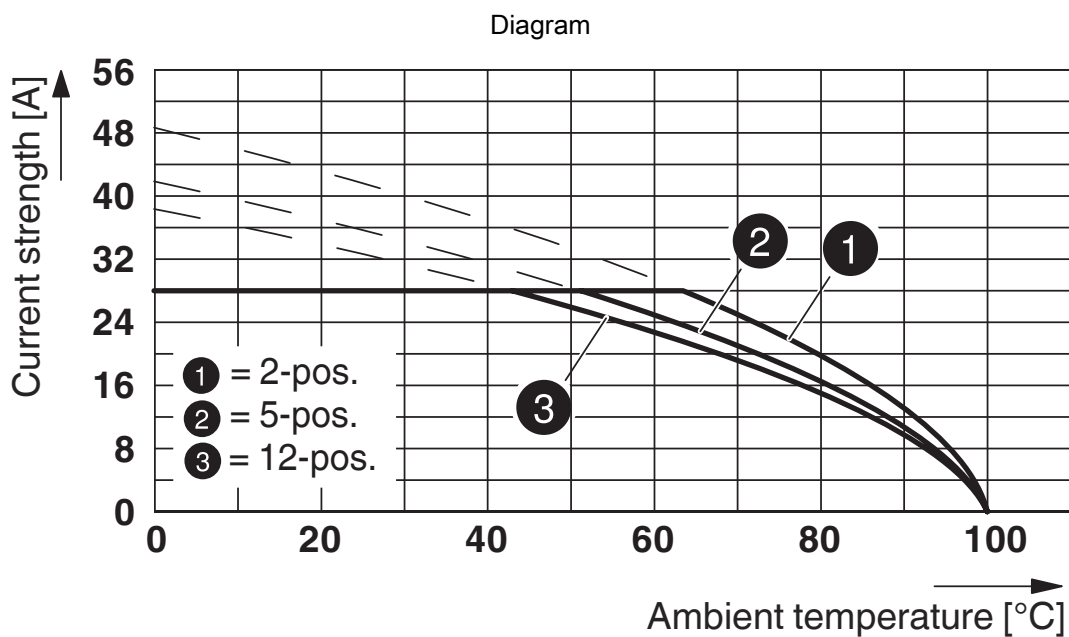


Type: PC 5/...-STF1-7,62 with PC 4/...-G-7,62 and BF-PC 4  
 Conductor cross section: 4 mm<sup>2</sup>

Diagram

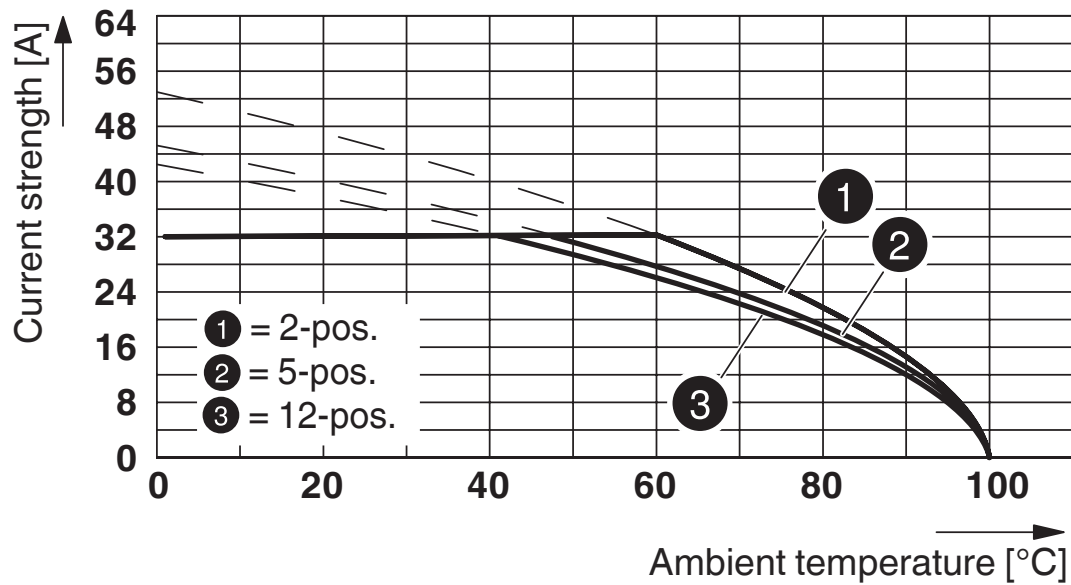

Derating curve for: PC 5/...-ST1-7,62 with PC 4/...-G-7,62  
 Conductor cross section: 6 mm<sup>2</sup>


Dimensional drawing

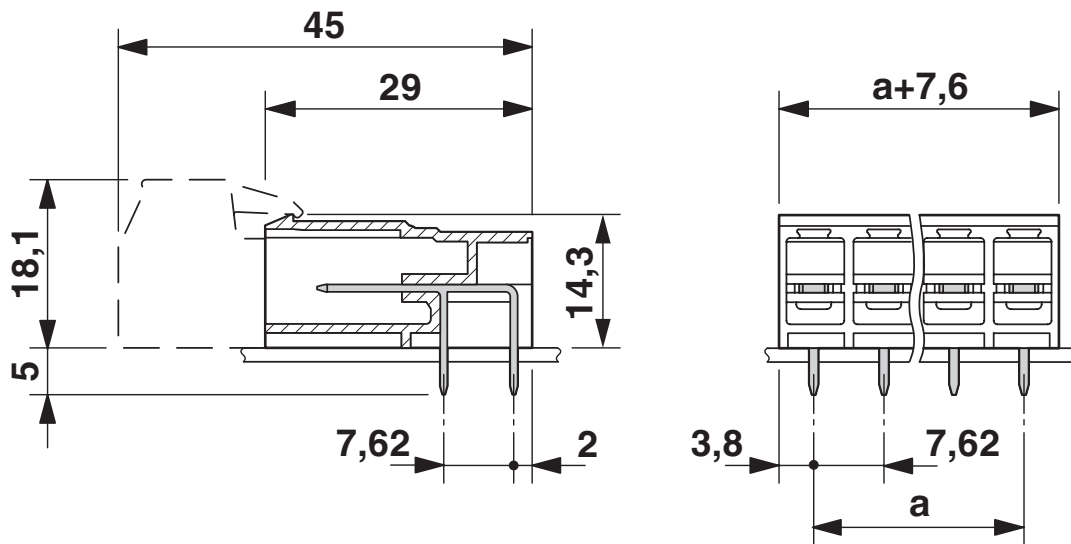




1804797


<https://www.phoenixcontact.com/in/products/1804797>

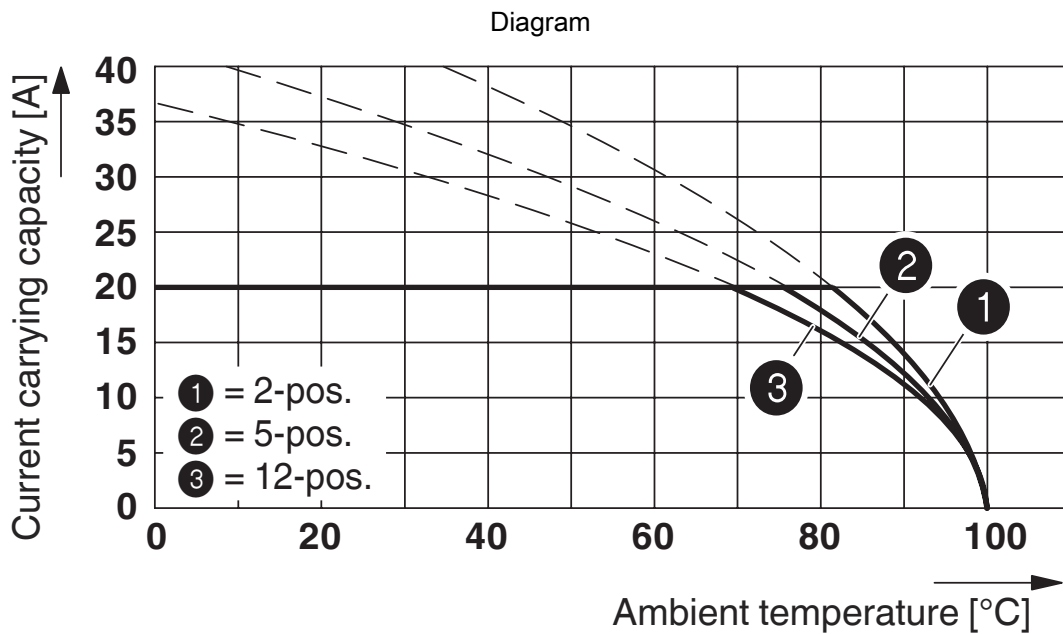

Type: PC 4/...-STF-7,62 with PC 4/...-G-7,62 and BF-PC 4

Drilling plan/solder pad geometry

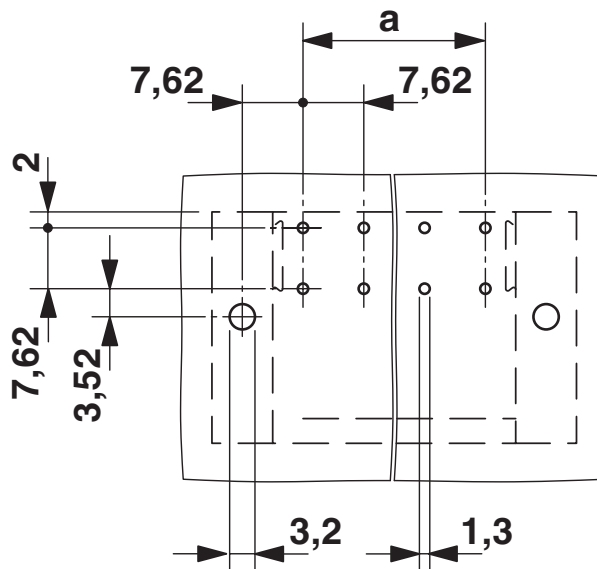

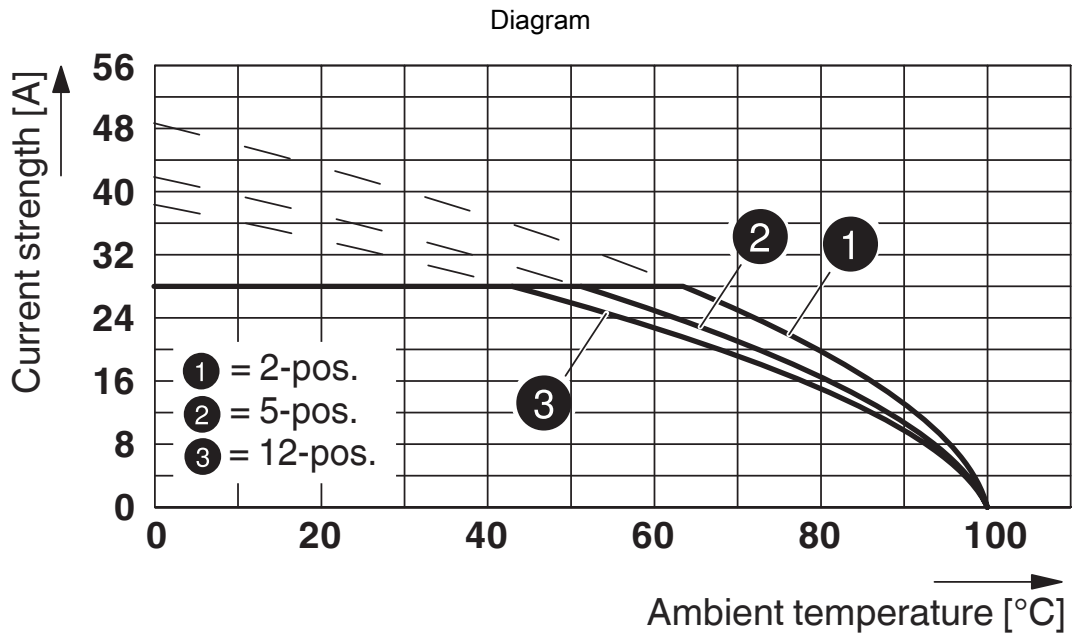

Type: PC 5/...-ST2-7,62 with PC 4/...-G-7,62

Conductor cross section: 4 mm<sup>2</sup>


# PC 4/ 2-G-7,62 - PCB header





1804797

<https://www.phoenixcontact.com/in/products/1804797>


## Approvals


|  |                       |                       |                   |                             |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>CSA</b><br>Approval ID: 13631 |                       |                       |                   |                             |
|  | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|  | 300 V                 | 20 A                  | -                 | -                           |
|  | 300 V                 | 20 A                  | -                 | -                           |

|  |  |  |  |  |
|--|--|--|--|--|
|  <b>EAC</b><br>Approval ID: B.01687 |  |  |  |  |
|--|--|--|--|--|

|   |                       |                       |                   |                             |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
|  <b>cULus Recognized</b><br>Approval ID: E60425-19920722 |                       |                       |                   |                             |
|   | Nominal Voltage $U_N$ | Nominal Current $I_N$ | Cross Section AWG | Cross Section $\text{mm}^2$ |
|   | 300 V                 | 30 A                  | -                 | -                           |
|   | 300 V                 | 30 A                  | -                 | -                           |

|  |  |  |  |  |
|--|--|--|--|--|
|  <b>DNV GL</b><br>Approval ID: TAE00001EZ |  |  |  |  |
|--|--|--|--|--|

|  |  |  |  |  |
|--|--|--|--|--|
|  <b>LR</b><br>Approval ID: LR21308805TA |  |  |  |  |
|--|--|--|--|--|

|   |  |  |  |  |
|---|--|--|--|--|
|  <b>BV</b><br>Approval ID: 35433/B0 BV |  |  |  |  |
|---|--|--|--|--|

# PC 4/ 2-G-7,62 - PCB header



1804797

<https://www.phoenixcontact.com/in/products/1804797>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460201 |
| ECLASS-12.0 | 27460201 |
| ECLASS-13.0 | 27460201 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC002637 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# PC 4/ 2-G-7,62 - PCB header

1804797

<https://www.phoenixcontact.com/in/products/1804797>



## Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# PC 4/ 2-G-7,62 - PCB header

1804797

<https://www.phoenixcontact.com/in/products/1804797>


## Accessories

### CP-PC RD - Coding profile

1701967

<https://www.phoenixcontact.com/in/products/1701967>

Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red



---

### BF-PC 4 - Mounting flange

1827570

<https://www.phoenixcontact.com/in/products/1827570>

Mounting flange, is snapped onto the left and right of the headers, for screw connection with PC 4/...-STF-7.62



## PC 4/ 2-G-7,62 - PCB header

1804797

<https://www.phoenixcontact.com/in/products/1804797>



## POWERCOMBICON PCB-SHIELD - Accessories

1968387

<https://www.phoenixcontact.com/in/products/1968387>




Shroud, Accessories, contact surface: Tin, product range: EMV-SCHIRMUNG

---

## PC 4/ 2-ST-7,62 - PCB connector

1804904

<https://www.phoenixcontact.com/in/products/1804904>



PCB connector, nominal cross section: 4 mm<sup>2</sup>, color: green, nominal current: 20 A, rated voltage (III/2): 630 V, contact surface: Tin, type of contact: Socket, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: PC 4/..-ST, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: COMBICON PC 4, locking: without, mounting: without, type of packaging: packed in cardboard

# PC 4/ 2-G-7,62 - PCB header

1804797

<https://www.phoenixcontact.com/in/products/1804797>



## PCC 4/ 2-ST-7,62 - PCB connector

1840191

<https://www.phoenixcontact.com/in/products/1840191>



PCB connector, nominal cross section: 4 mm<sup>2</sup>, color: green, nominal current: 20 A, rated voltage (III/2): 1000 V, type of contact: Socket, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: PCC 4/...-ST, pitch: 7.62 mm, connection method: Crimp connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: COMBICON PC 4, locking: without, mounting: without, type of packaging: packed in cardboard, Corresponding female crimp contacts with current [A] and conductor cross section range [mm<sup>2</sup>] data: 13,5A/STG-MTN 0,5-1,0 (3190438); 13,5A/STG-MTN 0,5-1,0 BA (3190629); 20A/STG-MTN 1,5-2,5 (3190506); 20A/STG-MTN 1,5-2,5 BA (3190632). BA = Taped contacts

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)