


FLKM 34 - Interface module



2281063

<https://www.phoenixcontact.com/in/products/2281063>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 34-pos.

Commercial Data

Item number	2281063
Packing unit	5 pc
Minimum order quantity	1 pc
Sales Key	CK2
Product Key	CK2212
Catalog Page	Page 242 (IF-2007)
GTIN	4017918054519
Weight per Piece (including packing)	173.55 g
Weight per Piece (excluding packing)	173.55 g
Customs tariff number	85369010
Country of origin	DE

FLKM 34 - Interface module



2281063

<https://www.phoenixcontact.com/in/products/2281063>

Technical Data

Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	34

Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

Insulation characteristics

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

Max. permissible operating voltage	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV

Connection data

Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Controller level

Connection method	IDC/FLK pin strip
Number of positions	34
Pitch	2.54 mm

Signaling

Status display present	No
------------------------	----

Dimensions

Width	90 mm
Height	77 mm
Depth	57.5 mm

FLKM 34 - Interface module



2281063

<https://www.phoenixcontact.com/in/products/2281063>

Material specifications

Housing insulation material	Polyamide 6 green
-----------------------------	-------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Approvals

UKCA

Certificate	UKCA-compliant
-------------	----------------

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

FLKM 34 - Interface module


2281063

<https://www.phoenixcontact.com/in/products/2281063>



Drawings

Circuit diagram

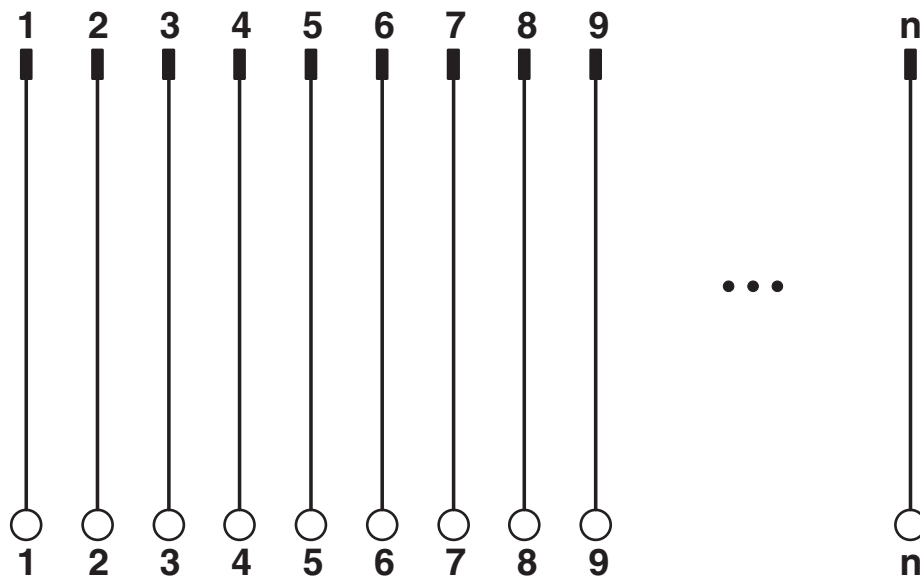


FLKM 34 - Interface module




2281063

<https://www.phoenixcontact.com/in/products/2281063>

Approvals

 cUL Recognized Approval ID: FILE E 118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Field wiring	125 V	1 A	30 - 12	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Field wiring	125 V	1 A	30 - 12	-

 EAC Approval ID: RU C-DE.A*30.B.01742				
---	--	--	--	--

FLKM 34 - Interface module



2281063

<https://www.phoenixcontact.com/in/products/2281063>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-13.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

FLKM 34 - Interface module

2281063

<https://www.phoenixcontact.com/in/products/2281063>



Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

FLKM 34 - Interface module

2281063

<https://www.phoenixcontact.com/in/products/2281063>




Accessories

FLK EZ-DR.../.../... - Cable

2295059

<https://www.phoenixcontact.com/in/products/2295059>

Round cable, with preassembly, not shielded, variable cable length



FLK 34/EZ-DR/ 50/KONFEK - Cable

2299479

<https://www.phoenixcontact.com/in/products/2299479>

Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 0.5 m



FLKM 34 - Interface module

2281063

<https://www.phoenixcontact.com/in/products/2281063>



FLK 34/EZ-DR/ 100/KONFEK - Cable

2299482

<https://www.phoenixcontact.com/in/products/2299482>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 1 m

FLK 34/EZ-DR/ 150/KONFEK - Cable

2299495

<https://www.phoenixcontact.com/in/products/2299495>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 1.5 m

FLKM 34 - Interface module

2281063

<https://www.phoenixcontact.com/in/products/2281063>



FLK 34/EZ-DR/ 200/KONFEK - Cable

2299505

<https://www.phoenixcontact.com/in/products/2299505>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 2 m

FLK 34/EZ-DR/ 300/KONFEK - Cable

2299518

<https://www.phoenixcontact.com/in/products/2299518>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 3 m

FLKM 34 - Interface module

2281063

<https://www.phoenixcontact.com/in/products/2281063>



FLK 34/EZ-DR/ 400/KONFEK - Cable

2299521

<https://www.phoenixcontact.com/in/products/2299521>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 4 m

FLK 34/EZ-DR/ 600/KONFEK - Cable

2299534

<https://www.phoenixcontact.com/in/products/2299534>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 6 m

FLKM 34 - Interface module

2281063

<https://www.phoenixcontact.com/in/products/2281063>



FLK 34/EZ-DR/ 800/KONFEK - Cable

2299547

<https://www.phoenixcontact.com/in/products/2299547>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 8 m

FLK 34/EZ-DR/1000/KONFEK - Cable

2299550

<https://www.phoenixcontact.com/in/products/2299550>



Round cable set; connection 1: IDC/FLK socket strip (1x 34-position); connection 2: IDC/FLK socket strip (1x 34-position); cable length: 10 m

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in