


FLKM 40 - Interface module



2281076

<https://www.phoenixcontact.com/in/products/2281076>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 40-pos.

Commercial Data

Item number	2281076
Packing unit	5 pc
Minimum order quantity	1 pc
Sales Key	CK2
Product Key	CK2212
Catalog Page	Page 242 (IF-2007)
GTIN	4017918054526
Weight per Piece (including packing)	209.12 g
Weight per Piece (excluding packing)	168.2 g
Customs tariff number	85369010
Country of origin	DE

FLKM 40 - Interface module



2281076

<https://www.phoenixcontact.com/in/products/2281076>

Technical Data

Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	40
No. of channels	32

Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

Insulation characteristics

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

No. of channels	32
Max. permissible operating voltage	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV

Supported controller ALLEN-BRADLEY SLC 500

Suitable I/O card	1746 OB 32
	1746 OV 32
	1746 IB 32
	1746 IV 32

Connection data

Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Controller level

Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	40
Pitch	2.54 mm

FLKM 40 - Interface module



2281076

<https://www.phoenixcontact.com/in/products/2281076>

Signaling

Status display present	No
------------------------	----

Dimensions

Width	112.5 mm
Height	77 mm
Depth	57.5 mm

Material specifications

Housing insulation material	Polyamide 6 green
-----------------------------	-------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Approvals

UKCA

Certificate	UKCA-compliant
-------------	----------------

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

FLKM 40 - Interface module


2281076

<https://www.phoenixcontact.com/in/products/2281076>



Drawings

Circuit diagram

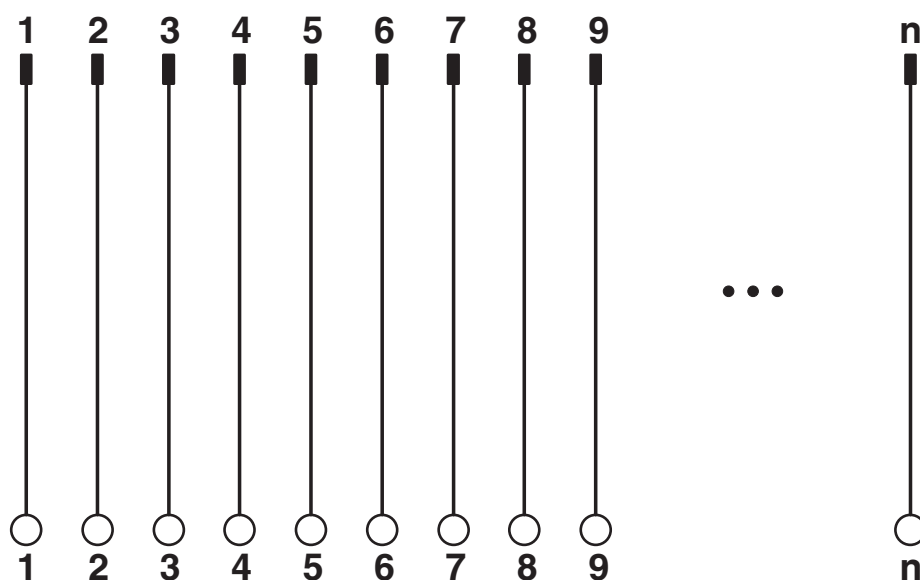

FLKM 40 - Interface module




2281076

<https://www.phoenixcontact.com/in/products/2281076>

Approvals

 cUL Recognized Approval ID: FILE E 118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Field wiring	125 V	1 A	30 - 12	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Field wiring	125 V	1 A	30 - 12	-

 EAC Approval ID: RU C-DE.A*30.B.01742				
---	--	--	--	--

FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>



Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-12.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>



Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>




Accessories

FLK EZ-DR.../.../... - Cable

2295059

<https://www.phoenixcontact.com/in/products/2295059>

Round cable, with preassembly, not shielded, variable cable length



FLK 40/EZ-DR/ 50/KONFEK - Cable

2288985

<https://www.phoenixcontact.com/in/products/2288985>

Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 0.5 m



FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>



FLK 40/EZ-DR/ 100/KONFEK - Cable

2288998

<https://www.phoenixcontact.com/in/products/2288998>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 1 m

FLK 40/EZ-DR/ 150/KONFEK - Cable

2289007

<https://www.phoenixcontact.com/in/products/2289007>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 1.5 m

FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>



FLK 40/EZ-DR/ 200/KONFEK - Cable

2289010

<https://www.phoenixcontact.com/in/products/2289010>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 2 m

FLK 40/EZ-DR/ 250/KONFEK - Cable

2289023

<https://www.phoenixcontact.com/in/products/2289023>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 2.5 m

FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>



FLK 40/EZ-DR/ 300/KONFEK - Cable

2289036

<https://www.phoenixcontact.com/in/products/2289036>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 3 m

FLK 40/EZ-DR/ 350/KONFEK - Cable

2289049

<https://www.phoenixcontact.com/in/products/2289049>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 3.5 m

FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>



FLK 40/EZ-DR/ 400/KONFEK - Cable

2289052

<https://www.phoenixcontact.com/in/products/2289052>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 4 m

FLK 40/EZ-DR/ 600/KONFEK - Cable

2299589

<https://www.phoenixcontact.com/in/products/2299589>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 6 m

FLKM 40 - Interface module

2281076

<https://www.phoenixcontact.com/in/products/2281076>



FLK 40/EZ-DR/ 800/KONFEK - Cable

2299592

<https://www.phoenixcontact.com/in/products/2299592>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 8 m

FLK 40/EZ-DR/1000/KONFEK - Cable

2299602

<https://www.phoenixcontact.com/in/products/2299602>



Round cable set; connection 1: IDC/FLK socket strip (1x 40-position); connection 2: IDC/FLK socket strip (1x 40-position); cable length: 10 m

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in