


FLKM 64 - Interface module



2281102

<https://www.phoenixcontact.com/in/products/2281102>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 64-pos.

Commercial Data

Item number	2281102
Packing unit	5 pc
Minimum order quantity	1 pc
Sales Key	CK2
Product Key	CK2212
Catalog Page	Page 242 (IF-2007)
GTIN	4017918054557
Weight per Piece (including packing)	295.5 g
Weight per Piece (excluding packing)	3.53 g
Customs tariff number	85369010
Country of origin	DE

FLKM 64 - Interface module



2281102

<https://www.phoenixcontact.com/in/products/2281102>

Technical Data

Product properties

Product type	Interface module
Product family	VARIOFACE
Number of positions	64

Insulation characteristics

Insulation	Functional insulation
------------	-----------------------

Insulation characteristics

Insulation	Functional insulation
Overvoltage category	II
Pollution degree	2

Electrical properties

Max. permissible operating voltage	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV

Connection data

Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Controller level

Connection method	IDC/FLK pin strip
Number of positions	64
Pitch	2.54 mm

Signaling

Status display present	No
------------------------	----

Dimensions

Width	169 mm
Height	77 mm
Depth	57.5 mm

FLKM 64 - Interface module



2281102

<https://www.phoenixcontact.com/in/products/2281102>

Material specifications

Housing insulation material	Polyamide 6 green
-----------------------------	-------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	IEC 60664
	DIN EN 50178

Mounting

Mounting type	DIN rail mounting
Mounting position	any

FLKM 64 - Interface module


2281102

<https://www.phoenixcontact.com/in/products/2281102>



Drawings

Circuit diagram

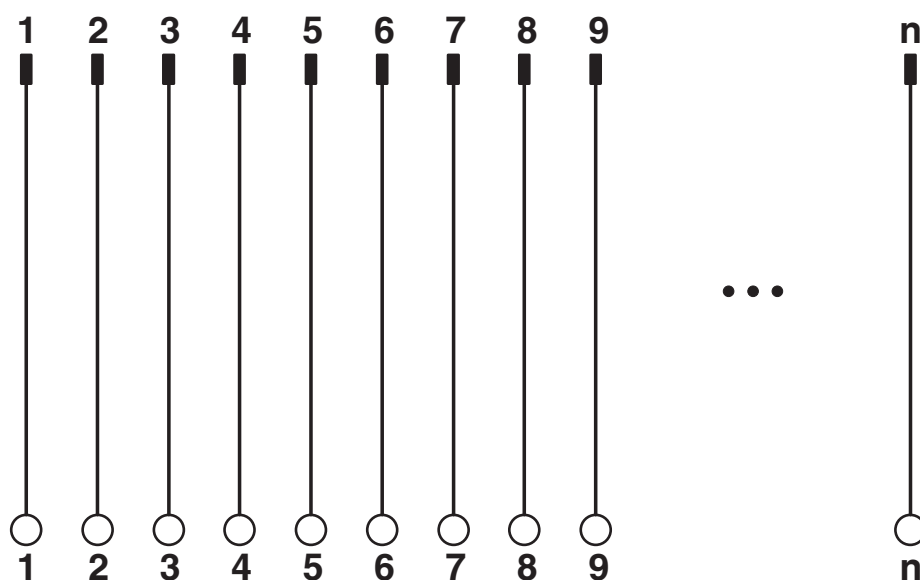

FLKM 64 - Interface module




2281102

<https://www.phoenixcontact.com/in/products/2281102>

Approvals

 cUL Recognized Approval ID: FILE E 118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Field wiring	125 V	1 A	30 - 12	-

 UL Recognized Approval ID: FILE E 118976				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Field wiring	125 V	1 A	30 - 12	-

 EAC Approval ID: RU C-DE.A*30.B.01742				
---	--	--	--	--

FLKM 64 - Interface module



2281102

<https://www.phoenixcontact.com/in/products/2281102>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-12.0	27141152

ETIM

ETIM 8.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

FLKM 64 - Interface module



2281102

<https://www.phoenixcontact.com/in/products/2281102>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in