

https://www.phoenixcontact.com/in/products/3202465



Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Ferrule, length: 5 mm, color: silver

Commercial Data

Item number	3202465
Packing unit	1,000 pc
Minimum order quantity	1,000 pc
Sales Key	ВН3
Product Key	BH3412
Catalog Page	Page 480 (C-3-2019)
GTIN	4017918157166
Weight per Piece (including packing)	0.021 g
Weight per Piece (excluding packing)	0.021 g
Customs tariff number	85369010
Country of origin	DE



https://www.phoenixcontact.com/in/products/3202465



Technical Data

Product properties

Connection data

Conductor connection

Conductor cross section flexible max.	0.25 mm ²
Conductor cross section AWG max.	24
Stripping length	5 mm

Material specifications

Color	silver
Material	CU-DHP
Coating	tin-plated (galvanic)

Environmental and real-life conditions

Ambient conditions

Permanent temperature	105 °C
Short-term temperature	120 °C


3202465

https://www.phoenixcontact.com/in/products/3202465



Drawings

Dimensional drawing

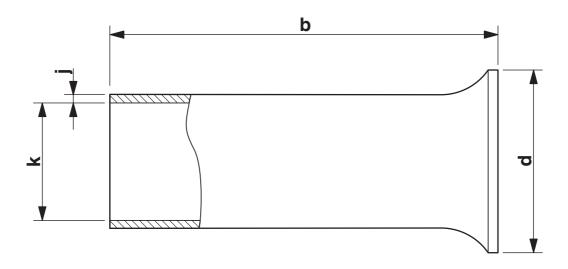

Sleeve length (b), insulating collar inner dimension (d), sleeve diameter (k), sleeve wall thickness (j)



https://www.phoenixcontact.com/in/products/3202465



Classifications

ECLASS

	ECLASS-10.0.1	27400201			
	ECLASS-11.0	27400201			
ETIM					
	ETIM 8.0	EC000005			
UNSPSC					
	UNSPSC 21.0	27121700			



https://www.phoenixcontact.com/in/products/3202465



Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

3202465

https://www.phoenixcontact.com/in/products/3202465



Accessories

CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

https://www.phoenixcontact.com/in/products/1213144



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from $0.14~\text{mm}^2$... $6~\text{mm}^2$, also for TWIN ferrules up to $2~\text{x}~4~\text{mm}^2$, automatic cross section adjustment, lateral insertion, equipped with fall protection

CRIMPFOX CENTRUS 6H - Crimping pliers

1213146

https://www.phoenixcontact.com/in/products/1213146



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm^2 ... 6 mm^2 , also for TWIN ferrules up to 2 x 4 mm^2 , automatic cross section adjustment, lateral insertion, equipped with fall protection



https://www.phoenixcontact.com/in/products/3202465



CRIMPFOX CENTRUS 10S - Crimping pliers

1213154

https://www.phoenixcontact.com/in/products/1213154



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm^2 ... 10 mm^2 , also for TWIN ferrules up to 2 x 4 mm^2 , automatic cross section adjustment, lateral insertion, equipped with fall protection

CRIMPFOX CENTRUS 10H - Crimping pliers

1213156

https://www.phoenixcontact.com/in/products/1213156



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm^2 ... 10 mm^2 , also for TWIN ferrules up to 2 x 4 mm^2 , automatic cross section adjustment, lateral insertion, equipped with fall protection



https://www.phoenixcontact.com/in/products/3202465



CRIMPFOX 10S - Crimping pliers

1212045

https://www.phoenixcontact.com/in/products/1212045



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm² ... 10 mm², unlockable pressure lock, lateral entry

CRIMPFOX 6H - Crimping pliers

1212046

https://www.phoenixcontact.com/in/products/1212046



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.14 mm^2 ... 6 mm^2 , unlockable pressure lock, lateral entry



https://www.phoenixcontact.com/in/products/3202465



CRIMPFOX 2,5-M - Crimping pliers

1212719

https://www.phoenixcontact.com/in/products/1212719



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm² ... 2.5 mm², lateral entry, trapezoidal crimp

CRIMPFOX 6-M - Crimping pliers

1212720

https://www.phoenixcontact.com/in/products/1212720



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm^2 ... 6.0 mm^2 , lateral entry, trapezoidal crimp



https://www.phoenixcontact.com/in/products/3202465



CRIMPFOX 6 - Crimping pliers

1212034

https://www.phoenixcontact.com/in/products/1212034



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm^2 ... 6.0 mm^2 , lateral entry, trapezoidal crimp

CRIMPFOX 6T - Crimping pliers

1212037

https://www.phoenixcontact.com/in/products/1212037



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm^2 ... 6 mm^2 , lateral entry, trapezoidal crimp



https://www.phoenixcontact.com/in/products/3202465



CRIMPFOX 6T-F - Crimping pliers

1212038

https://www.phoenixcontact.com/in/products/1212038



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm^2 ... 6 mm^2 , front entry, trapezoidal crimp

CRIMPFOX 6S-F - Crimping pliers

1212043

https://www.phoenixcontact.com/in/products/1212043



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.5 mm^2 ... 6 mm^2 , front entry, square crimp



https://www.phoenixcontact.com/in/products/3202465



CRIMPFOX 16 S - Crimping pliers

1207983

https://www.phoenixcontact.com/in/products/1207983



Crimping pliers for ferrules up to 16 mm²

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in