

# CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/in/products/1212034>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

## Your advantages

- All ferrules can be optimally crimped with a minimum amount of effort even in the case of large conductor cross sections
- Unlockable pressure lock
- Comprehensive range of crimping pliers
- Consistently high crimping quality
- Marked die stations for precise processing of corresponding cross sections

## Commercial Data

Item number	1212034
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	BH3
Product Key	BH3131
Catalog Page	Page 417 (C-3-2019)
GTIN	4046356453813
Weight per Piece (including packing)	444.2 g
Weight per Piece (excluding packing)	444.2 g
Customs tariff number	82032000
Country of origin	SE

# CRIMPFOX 6 - Crimping pliers



1212034

<https://www.phoenixcontact.com/in/products/1212034>

## Technical Data

### Notes

#### Environmental Product Compliance

California Proposition 65	Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration
---------------------------	---

### Product properties

Product type	Crimping tool
Compression	Trapezoidal crimp

#### Crimping position 1

Min. cross section	0.25 mm <sup>2</sup>
Max. cross section	0.75 mm <sup>2</sup>
AWG min	24
AWG max	20

#### Crimping position 2

Min. cross section	1 mm <sup>2</sup>
Max. cross section	1.5 mm <sup>2</sup>
AWG min	18
AWG max	16

#### Crimping position 3

Max. cross section	2.5 mm <sup>2</sup>
AWG max	14

#### Crimping position 4

Max. cross section	4 mm <sup>2</sup>
AWG max	12

#### Crimping position 5

Max. cross section	6 mm <sup>2</sup>
AWG max	10

### Connection data

#### Conductor connection

Cross section range, metric	0.25 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section range AWG	24 ... 10

### Dimensions

Width	18 mm
Height	59 mm
Length	198 mm

# CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/in/products/1212034>



## Material specifications

Color	black
-------	-------

# CRIMPFOX 6 - Crimping pliers


1212034

<https://www.phoenixcontact.com/in/products/1212034>



## Drawings

Product drawing

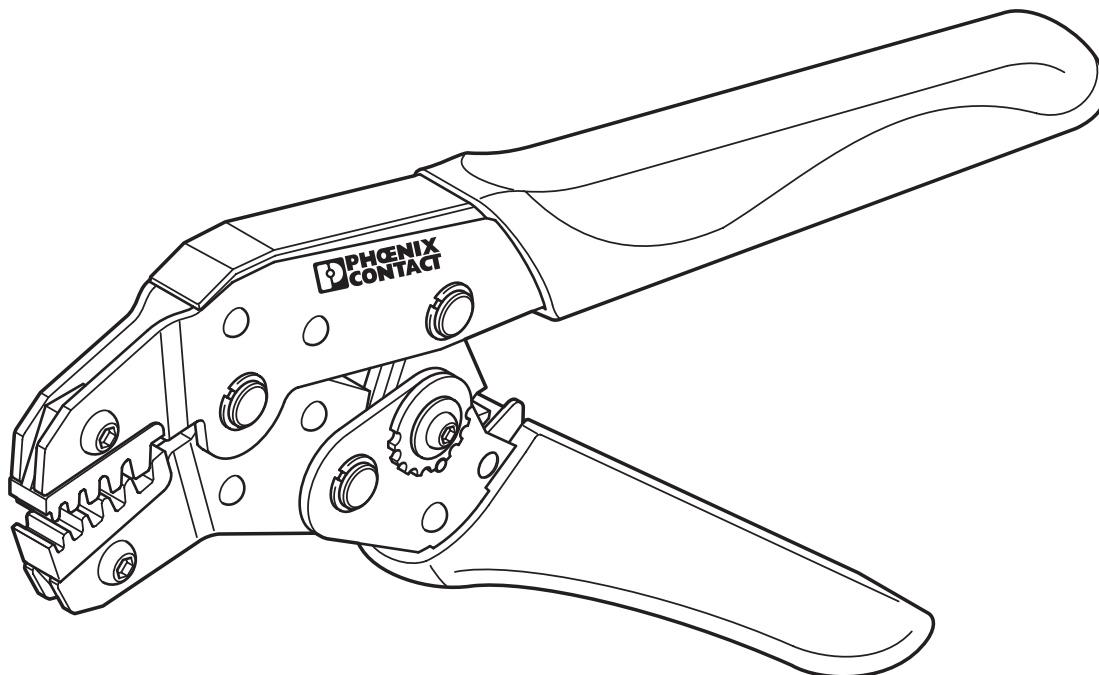

# CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/in/products/1212034>



## Approvals



**EAC**

Approval ID: RU x-DE.xx08.B.02974

# CRIMPFOX 6 - Crimping pliers



1212034

<https://www.phoenixcontact.com/in/products/1212034>

## Classifications

### ECLASS

ECLASS-11.0	21043811
ECLASS-10.0.1	21043811
ECLASS-12.0	21043811
ECLASS-13.0	21043811

### ETIM

ETIM 8.0	EC000168
----------	----------

### UNSPSC

UNSPSC 21.0	27111500
-------------	----------

# CRIMPFOX 6 - Crimping pliers



1212034

<https://www.phoenixcontact.com/in/products/1212034>

## Accessories

### CRIMPFOX 6/DIE - Replacement die

1212035

<https://www.phoenixcontact.com/in/products/1212035>

Spare die for CRIMPFOX 6



---

### CRIMPFOX/ SPR-3 - Replacement spring

1212036

<https://www.phoenixcontact.com/in/products/1212036>

Spare recuperating spring



---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)