


HB2

Instruction Sheet

Warning! This tool should not be used on live electrical circuits. It is not protected against electrical shock! Always use OSHA/ANSI or other industry approved eye protection when using tools. This tool is not to be used for purpose other than intended. Read carefully and understand instructions before using this tool.


The **HB2** tool is used for slitting the PE, PVC, or rubber insulation on electrical cables of between 4.5-28.5 mm (3/16" and 1-1/8") diameter with an insulation depth of up to 3 mm (1/8") max, providing for efficient insulation removal.

1. The cutting blade is adjusted for depth of incision to the thickness of insulation by turning the knurled screw shown (A).
2. Position the cable between the cutting blade and gripping arm, which is spring loaded and holds the cable in contact with the blade.
3. Rotate the tool clockwise around the cable to provide a circumferential cut ensuring clean separation of the insulation (B).
4. Rotate the blade through 90 degrees by depressing the push button shown (C). While holding the button, pull the cutter along the length of the cable to provide the longitudinal cut (D).
5. The insulation may now be pulled clean away.
6. To aid removal of tough insulation, **HB2** tool is provided with a ripping blade located in the base of the tool. The ripping blade is released by pressing the button shown (E).
7. For cable diameters above 19 mm (3/4") remove plastic gripping arm cover (F) from the cable support bracket.

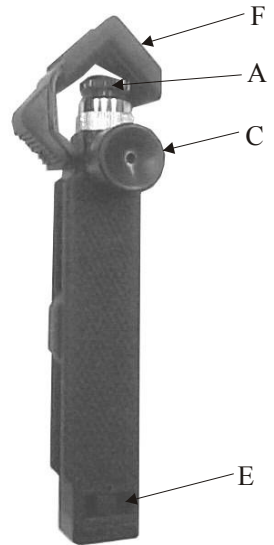

REPLACEMENT BLADE (Cembre code: 2591314)

Replacement cutting blades are simply fitted by removal of the knurled adjuster screw and locking nut.



Cembre S.p.A.
Via Serenissima, 9
25135 Brescia (Italia)
Telefono: +39 030 36921
Telefax: +39 030 3365766
E-mail: sales@cembre.com
www.cembre.com

Cembre Ltd.
Dunton Park
Kingsbury Road, Curdworth - Sutton Coldfield
West Midlands B76 9EB (UK)
Tel.: +44 01675 470440 - Fax: +44 01675 470220
E-mail: sales@cembre.co.uk
www.cembre.co.uk

Cembre S.a.r.l.
22 Avenue Ferdinand de Lesseps
91420 Morangis (France)
Tél.: +33 01 60 49 11 90 - Fax: +33 01 60 49 29 10
CS 92014 - 91423 Morangis Cédex
E-mail: info@cembre.fr
www.cembre.fr

Cembre España S.L.U.
Calle Verano 6 y 8
28850 Torrejón de Ardoz
Madrid (España)
Tel.: +34 91 4852580 - Fax: +34 91 4852581
E-mail: comercial@cembre.es
www.cembre.es

Cembre GmbH
Heidemannstraße 166
80939 München (Deutschland)
Telefon: +49 89 3580676
E-mail: sales@cembre.de
www.cembre.de

IKUMA GmbH & Co. KG
Boschstraße 7
71384 Weinstadt (Deutschland)
Telefon: +49 7151 20536-60
Telefax: +49 7151 20536-80
E-mail: info@ikuma.de
www.ikuma.de

Cembre Inc.
Raritan Center Business Park
181 Fieldcrest Avenue
Edison, New Jersey 08837 (USA)
Tel.: +1 732 225-7415 - Fax: +1 732 225-7414
E-mail: sales.US@cembre.com
www.cembreinc.com