


STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Double-level spring-cage terminal block, with equipotential bonder, nom. voltage: 500 V, nominal current: 17.5 A, connection method: Spring-cage connection, 1st and 2nd level, Rated cross section: 1.5 mm², cross section: 0.08 mm² - 1.5 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Compact design for maximum space savings
- Connect the levels using FBS ...-PV bridges
- Tested for railway applications

Commercial Data

Item number	3031526
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE2
Product Key	BE2114
Catalog Page	Page 208 (C-1-2019)
GTIN	4017918176303
Weight per Piece (including packing)	8.96 g
Weight per Piece (excluding packing)	8.335 g
Customs tariff number	85369010
Country of origin	DE

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Technical Data

Product properties

Product type	Multi-level terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
	Process industry
Number of connections	4
Number of rows	2
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Number of connections per level	2
Nominal cross section	1.5 mm ²

1st and 2nd level

Stripping length	10 mm
Internal cylindrical gage	A1
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.08 mm ² ... 1.5 mm ²
Cross section AWG	28 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	28 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²
Nominal current	17.5 A (with 1.5 mm ² conductor cross section)
Maximum load current	17.5 A (in case of a 1.5 mm ² conductor cross section, the maximum load current must not be exceeded by the total current of all connected conductors.)
Nominal voltage	500 V
Nominal cross section	1.5 mm ²

Ex data

Rated data (ATEX/IECEx)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Identification	□ II 2 GD Ex eb IIC Gb
Operating temperature range	-60 °C ... 110 °C
Ex-certified accessories	3030459 D-STTB 2,5 3030747 ATP-STTB 4 1204504 SZF 0-0,4X2,5 3022276 CLIPFIX 35-5 3022218 CLIPFIX 35
List of bridges	Plug-in bridge / FBS 2-4 / 3030116 Plug-in bridge / FBS 3-4 / 3030129 Plug-in bridge / FBS 4-4 / 3030132 Plug-in bridge / FBS 5-4 / 3030145 Plug-in bridge / FBS 10-4 / 3030158 Plug-in bridge / FBS 20-4 / 3030352
Bridge data	13.5 A / 1.5 mm ²
Ex temperature increase	40 K (17 A / 1.5 mm ²)
Rated voltage	440 V
for bridging with bridge	440 V
- At bridging between non-adjacent terminal blocks	352 V
Rated insulation voltage	400 V
output	(Permanent)

Ex level General

Rated current	15 A
Maximum load current	15 A

Ex connection data General

Nominal cross section	1.5 mm ²
Rated cross section AWG	16
Connection capacity rigid	0.08 mm ² ... 1.5 mm ²
Connection capacity AWG	28 ... 16
Connection capacity flexible	0.08 mm ² ... 1.5 mm ²
Connection capacity AWG	28 ... 16
output	(Permanent)

Ex level Level 1

Contact resistance	1.07 mΩ
output	(Permanent)

Ex level Level 2

Contact resistance	0.91 mΩ
output	(Permanent)

Ex level PV connection

Contact resistance	1.19 mΩ
--------------------	---------

Dimensions

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Width	4.2 mm
End cover width	2.2 mm
Height NS 35/15	55 mm
Height NS 35/7,5	47.5 mm
Height	1.87 "
Length	67.5 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Result	Test passed
--------	-------------

Temperature-rise test

Requirement temperature-rise test	Increase in temperature \leq 45 K
Result	Test passed
Short-time withstand current 1.5 mm ²	0.18 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

Test force setpoint	1 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.08 mm ² / 0.1 kg 1.5 mm ² / 0.4 kg
Result	Test passed

Environmental and real-life conditions

Aging

Temperature cycles	192
Result	Test passed

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s ²) ² /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
---------------------------------	---

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

STTB 1,5-PV - Double-level spring-cage terminal block




3031526

<https://www.phoenixcontact.com/in/products/3031526>

Drawings

Circuit diagram

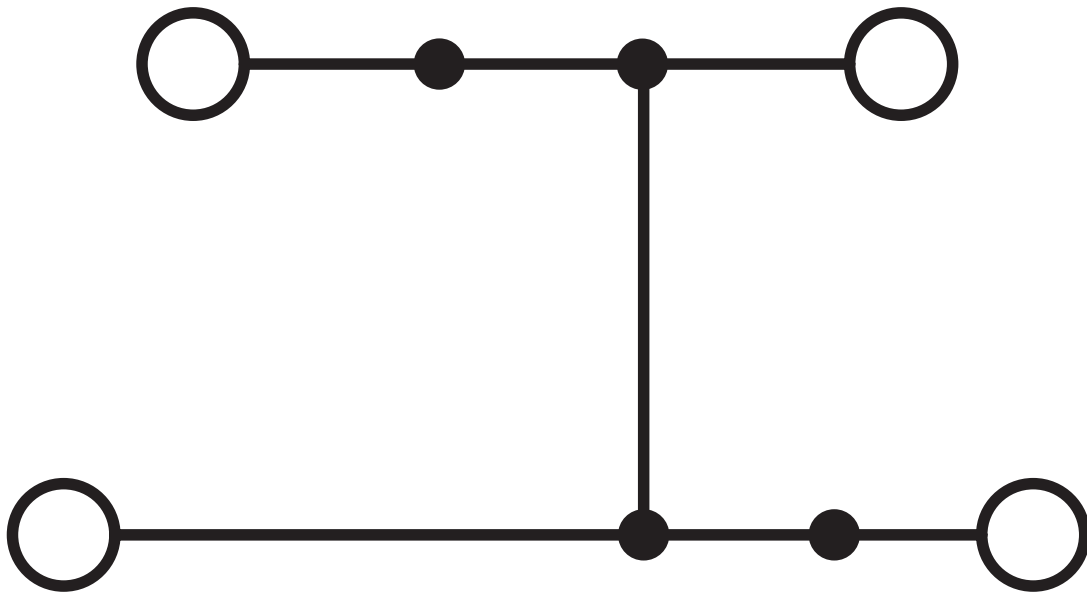


STTB 1,5-PV - Double-level spring-cage terminal block




3031526

<https://www.phoenixcontact.com/in/products/3031526>

Approvals

 CSA Approval ID: 13631				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	300 V	15 A	26 - 14	-
	300 V	15 A	26 - 14	-


 IECEE CB Scheme Approval ID: DE1-63027_A1				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	500 V	17.5 A	-	0.2 - 1.5


 LR Approval ID: LR2014888TA				
---	--	--	--	--

 NK Approval ID: 09 ME 140				
---	--	--	--	--

 RS Approval ID: 22.44.01.00083.250				
--	--	--	--	--

 BV Approval ID: 13403/D0 BV				
---	--	--	--	--

 VDE Zeichengenehmigung Approval ID: 40009031				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	500 V	17.5 A	-	0.2 - 1.5

 cULus Recognized Approval ID: E60425				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	300 V	15 A	26 - 14	-
	300 V	15 A	26 - 14	-
	600 V	5 A	26 - 14	-

 ATEX Approval ID: KEMA01ATEX2129U				
---	--	--	--	--

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	440 V	15 A	-	0.08 - 1.5



EAC Ex

Approval ID: RU C-DE.HA91.B.00066



IEC Ex

Approval ID: IECEx KEM 06.0043U

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	440 V	15 A	-	0.08 - 1.5



CCC

Approval ID: 2020322313000621



NEPSI

Approval ID: GYJ20.1193U



UKCA-EX

Approval ID: DEKRA 21UKEX0302U

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Classifications

ECLASS

ECLASS-11.0

27141120

ETIM

ETIM 8.0

EC000897

UNSPSC

UNSPSC 21.0

39121400

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

Accessories

 Note: Applying some accessories below might limit this product.


FBS 2-4 - Plug-in bridge

3030116

<https://www.phoenixcontact.com/in/products/3030116>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 15 A

FBS 3-4 - Plug-in bridge

3030129

<https://www.phoenixcontact.com/in/products/3030129>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>


FBS 4-4 - Plug-in bridge

3030132

<https://www.phoenixcontact.com/in/products/3030132>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 15 A


FBS 5-4 - Plug-in bridge

3030145

<https://www.phoenixcontact.com/in/products/3030145>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>


FBS 10-4 - Plug-in bridge

3030158

<https://www.phoenixcontact.com/in/products/3030158>



Plug-in bridge, pitch: 4.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 15 A


FBS 20-4 - Plug-in bridge

3030352

<https://www.phoenixcontact.com/in/products/3030352>



Plug-in bridge, pitch: 4.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

FBS 2-4 BU - Plug-in bridge

3030117

<https://www.phoenixcontact.com/in/products/3030117>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 15 A


FBS 3-4 BU - Plug-in bridge

3030130

<https://www.phoenixcontact.com/in/products/3030130>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>


FBS 4-4 BU - Plug-in bridge

3030133

<https://www.phoenixcontact.com/in/products/3030133>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 15 A


FBS 5-4 BU - Plug-in bridge

3030146

<https://www.phoenixcontact.com/in/products/3030146>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>


FBS 10-4 BU - Plug-in bridge

3036851

<https://www.phoenixcontact.com/in/products/3036851>




Plug-in bridge, pitch: 4.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 15 A


FBS 20-4 BU - Plug-in bridge

3030353

<https://www.phoenixcontact.com/in/products/3030353>



Plug-in bridge, pitch: 4.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>


FBS 2-4 GY - Plug-in bridge

3030118

<https://www.phoenixcontact.com/in/products/3030118>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 15 A


FBS 3-4 GY - Plug-in bridge

3030131

<https://www.phoenixcontact.com/in/products/3030131>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>


FBS 4-4 GY - Plug-in bridge

3030134

<https://www.phoenixcontact.com/in/products/3030134>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 15 A


FBS 5-4 GY - Plug-in bridge

3030147

<https://www.phoenixcontact.com/in/products/3030147>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 15 A

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

D-STTB 2,5 - End cover

3030459

<https://www.phoenixcontact.com/in/products/3030459>

End cover, length: 67.6 mm, width: 2.2 mm, height: 39.7 mm, color: gray



ATP-STTB 4 - Partition plate

3030747

<https://www.phoenixcontact.com/in/products/3030747>

Partition plate, length: 88.7 mm, width: 2 mm, height: 53 mm, color: gray



STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

STP 4-2 - Marker carriers

0810575

<https://www.phoenixcontact.com/in/products/0810575>




Marker carriers, snaps into ST 1,5... spring-cage terminal blocks, can be marked with UC-TM 4, UC-TMF 4, UCT-TM 4, UCT-TMF 4, ZB 4, or ZBF 4, gray, unlabeled, mounting type: plug in, lettering field size: 4 x 10.5 mm

WST 1,5 - Warning cover

3030958

<https://www.phoenixcontact.com/in/products/3030958>



Warning cover, Strip, yellow, labeled, mounting type: plug in, for terminal block width: 4.25 mm, lettering field size: 4.25 x 3.55 mm, Number of individual labels: 5

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/in/products/1204504>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

ST-IL - Mounting material

3039900

<https://www.phoenixcontact.com/in/products/3039900>

Operating decal for the ST terminal block



STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/in/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/in/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/in/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/in/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/in/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/in/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/in/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/in/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/in/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/in/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

ZBF 4:UNBEDRUCKT - Zack Marker strip, flat

0808587

<https://www.phoenixcontact.com/in/products/0808587>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

ZBF 4 CUS - Zack Marker strip, flat

0825023

<https://www.phoenixcontact.com/in/products/0825023>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

ZBF 4,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808626

<https://www.phoenixcontact.com/in/products/0808626>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

STTB 1,5-PV - Double-level spring-cage terminal block




3031526

<https://www.phoenixcontact.com/in/products/3031526>

ZBF 4,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808820

<https://www.phoenixcontact.com/in/products/0808820>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

ZBF 4,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810818

<https://www.phoenixcontact.com/in/products/0810818>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 5.15 x 4.15 mm, Number of individual labels: 10

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

ZBF 4,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810850

<https://www.phoenixcontact.com/in/products/0810850>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 5.15 x 4.15 mm, Number of individual labels: 10

UC-TMF 4 - Marker for terminal blocks

0818166

<https://www.phoenixcontact.com/in/products/0818166>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 5.1 mm, Number of individual labels: 120

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

UC-TMF 4 CUS - Marker for terminal blocks

0824630

<https://www.phoenixcontact.com/in/products/0824630>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, lettering field size: 3.6 x 5.1 mm, Number of individual labels: 120

UCT-TMF 4 - Marker for terminal blocks

0828742

<https://www.phoenixcontact.com/in/products/0828742>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.4 x 4.7 mm, Number of individual labels: 90

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

UCT-TMF 4 CUS - Marker for terminal blocks

0829651

<https://www.phoenixcontact.com/in/products/0829651>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, lettering field size: 3.4 x 4.7 mm, Number of individual labels: 90

ISH 1,5/0,2 - Insulating sleeve

3206131

<https://www.phoenixcontact.com/in/products/3206131>



Insulating sleeve, color: white

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

ISH 1,5/0,5 - Insulating sleeve

3031034

<https://www.phoenixcontact.com/in/products/3031034>



Insulating sleeve, color: gray

PAI-4 - Test adapter

3030925

<https://www.phoenixcontact.com/in/products/3030925>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 4.2 mm pitch, number of positions: 1, fuse type: , mounting type: , , color: gray

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

PS-4 - Test plugs

3030970

<https://www.phoenixcontact.com/in/products/3030970>



Test plugs, Modular test plug, number of positions: 1, fuse type: , mounting type: , , color: red

DP PS-4 - Spacer plate

3036712

<https://www.phoenixcontact.com/in/products/3036712>



Spacer plate, length: 22.4 mm, width: 4.2 mm, height: 29 mm, number of positions: 1, color: red

STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/in/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/in/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

STTB 1,5-PV - Double-level spring-cage terminal block



3031526


<https://www.phoenixcontact.com/in/products/3031526>

E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/in/products/0800886>

End clamp, width: 9.5 mm, color: gray



E/UK - End clamp

1201442

<https://www.phoenixcontact.com/in/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



STTB 1,5-PV - Double-level spring-cage terminal block



3031526

<https://www.phoenixcontact.com/in/products/3031526>

E/UK 1 - End clamp

1201413

<https://www.phoenixcontact.com/in/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in