

UC-TMN 7,5 CUS - Marker for terminal blocks



0824690

<https://www.phoenixcontact.com/in/products/0824690>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.

Marker for terminal blocks, Sheet, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: plug in, for terminal block width: 7.5 mm, lettering field size: 3.97 x 6.9 mm, Number of individual labels: 64



Your advantages

- The UC-TMN ... UniCard labeling range includes markers for products with a marking stud holder, such as mini terminal blocks, transformer terminal blocks or COMBICON PCB connection terminal blocks
- Marking service: Phoenix Contact can custom-mark all UniCard markers according to your specifications
- The multi-section marking strips are easy to fit and can be easily separated if required
- The sheets provide space for including function texts
- The markers support multi-line labeling
- The format automatically ensures printing with a high degree of positioning accuracy

Commercial Data

Item number	0824690
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	BG8
Product Key	BG8117
Catalog Page	Page 67 (C-5-2013)
GTIN	4046356360210
Weight per Piece (including packing)	6.2 g
Weight per Piece (excluding packing)	6.2 g
Customs tariff number	49119900
Country of origin	PL

UC-TMN 7,5 CUS - Marker for terminal blocks



0824690

<https://www.phoenixcontact.com/in/products/0824690>

Technical Data

Product properties

Product type	Labeled terminal marker
Pitch	7.5 mm
Type	high

Marking

Number of individual labels	64
Number of individual labels per row	8

Marking technology

Device	5147999 BLUEMARK CLED
	5144615 CMS-P1-PLOTTER
Printability	UV LED technology
	Plotter

Mounting

Mounting type	plug in
---------------	---------

Material specifications

RoHS compliant	yes
Color	white
Material	PA
Flammability rating according to UL 94	V2
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	120 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2
Components	free from silicone and halogen

Environmental and real-life conditions

Test for substances that would hinder coating with paint or varnish

Result	Test passed
--------	-------------

UV resistance

Specification	ISO 4892-2:2013-03 (following)
Result	Test passed
Test duration	96 h

Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
---------------------------------	-------------------

Dimensions

UC-TMN 7,5 CUS - Marker for terminal blocks



0824690

<https://www.phoenixcontact.com/in/products/0824690>


Width	6.9 mm
Height	4 mm
Length	3.97 mm
Pitch	7.5 mm

Standards and regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------

Drawings

Schematic diagram

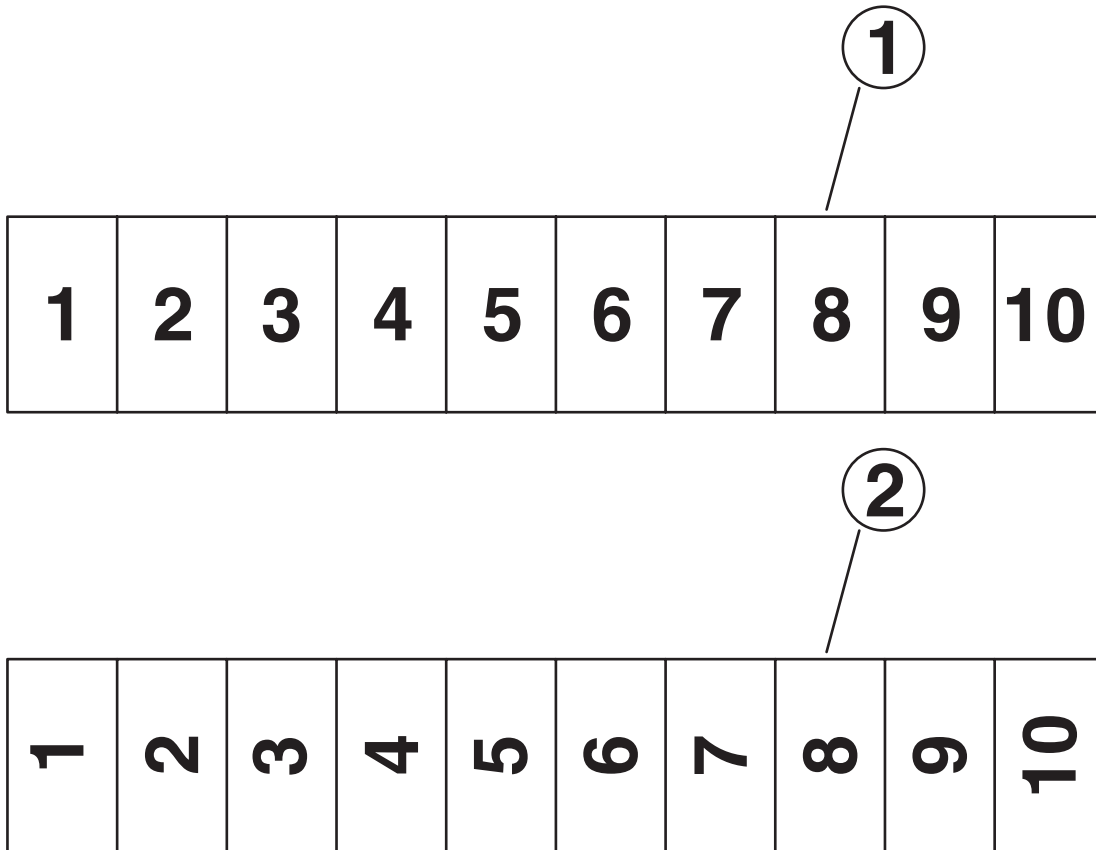

- ① Horizontal
- ② Vertical

UC-TMN 7,5 CUS - Marker for terminal blocks



0824690

<https://www.phoenixcontact.com/in/products/0824690>

Classifications

ECLASS

ECLASS-10.0.1	27141137
ECLASS-11.0	27281101
ECLASS-12.0	27281101
ECLASS-13.0	27281101

ETIM

ETIM 8.0	EC000761
----------	----------

UNSPSC

UNSPSC 21.0	39131500
-------------	----------

UC-TMN 7,5 CUS - Marker for terminal blocks



0824690

<https://www.phoenixcontact.com/in/products/0824690>

Accessories

P1 UC-MAG 1 - Magazine

5146079

<https://www.phoenixcontact.com/in/products/5146079>



Magazine, for CMS-P1-PLOTTER and PLOTMARK, for accommodating UC-TM.
..., UC-TMN..., UC-WMC 3,1..., UC-WMTBA...

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in