

Product data sheet

Specifications



Socket with clamp, Harmony, for RXG2 relays, 5A, screw connectors, separate contact

RGZE1S48M

Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Separate

Complementary

Product compatibility	Plug-in relay RXG with 2 C/O contact
[Ui] rated insulation voltage	250 V
[Uimp] rated impulse withstand voltage	6 kV between coil and contact with reinforced insulation 4 kV between contacts with basic insulation 4 kV between poles with basic insulation 4 kV between terminals and DIN rail with basic insulation
[In] rated current	5 A
[Ue] rated operational voltage	250 V conforming to IEC 300 V conforming to UL
Dielectric strength	5 kV between coil and contact with reinforced insulation 2.5 kV between contacts with basic insulation 3 kV between poles with basic insulation 3 kV between terminals and DIN rail with basic insulation
Connections - terminals	Screw terminals, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Screw terminals, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw terminals, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end Screw terminals, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end
Screw type	M3
Environment	
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...70 °C
Relative humidity	10...85 %
Standards	CSA C22.2 No 14 IEC 61984 UL 508
Product certifications	EAC CE CSA UL DNV-GL
IP degree of protection	IP20

Overvoltage category	III
Pollution degree	3


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.15 cm
Package 1 Width	1.6 cm
Package 1 Length	8 cm
Package 1 Weight	39.7 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	7.8 cm
Package 2 Width	8.4 cm
Package 2 Length	16.3 cm
Package 2 Weight	445 g
Unit Type of Package 3	S03
Number of Units in Package 3	180
Package 3 Height	30 cm
Package 3 Width	30 cm
Package 3 Length	40 cm
Package 3 Weight	8.648 kg

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions

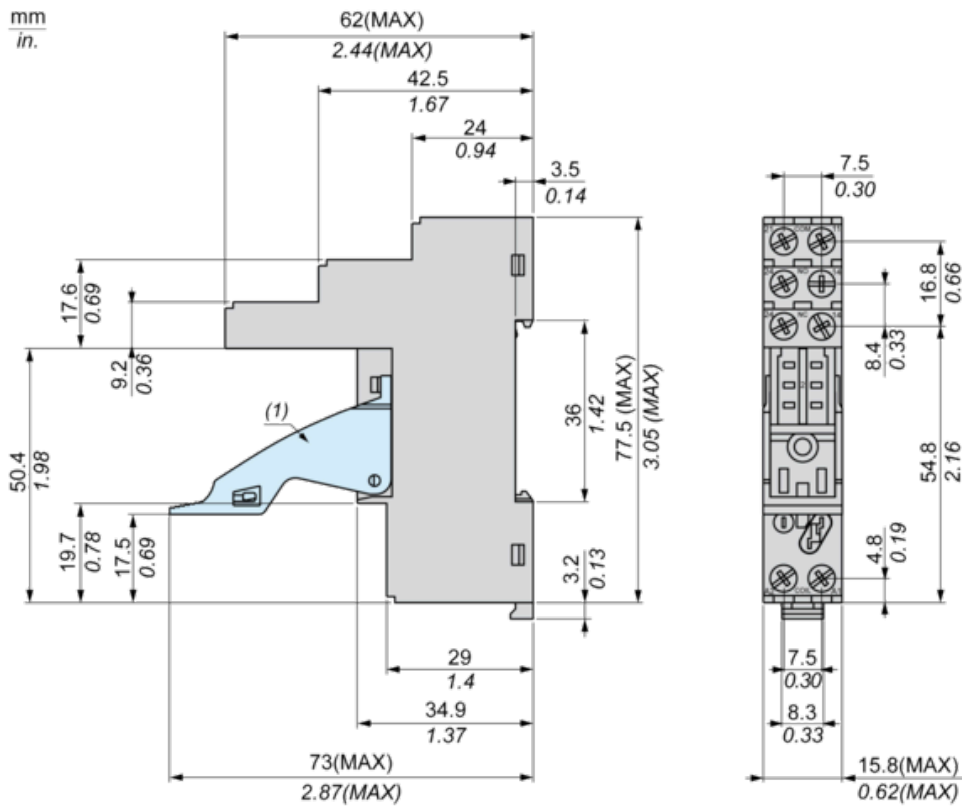

(1) Maintaining clamp

Wiring Diagram

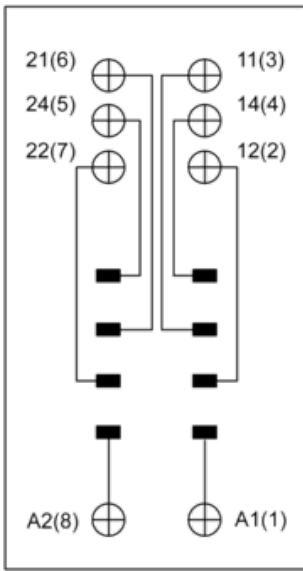

Recommended replacement(s)